

# Front Floor Under Cover Installation During PDS

Service Category General

Section Pre-Delivery Service

Market USA

Lexus Supports ASE Certification 

## Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2015	LS460, LS600H	

## Introduction

The front floor under cover set (right and left floor under covers and 8 clips) is loaded in the luggage compartment at the assembly plant to avoid damage during transit.

Install the front floor under covers during Pre-Delivery Service (PDS).

## Warranty Information

OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-


## Installation Procedure

1. Remove the 2 clips from the center floor under cover.

### HINT

Dispose of the original clips. They will NOT be reused.

Figure 1.

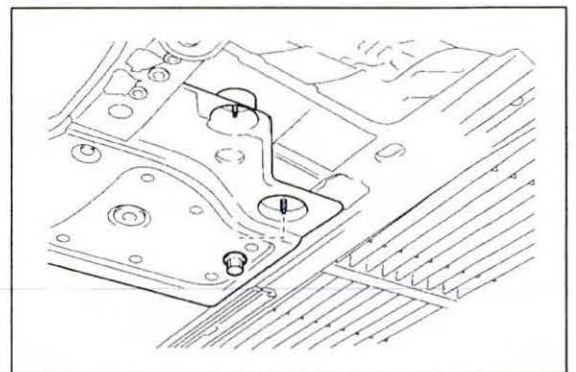

## Front Floor Under Cover Installation During PDS

### Installation Procedure (Continued)


2. Install the left side front floor under cover.
  - A. Install the under cover (for front side) and the fender apron with 2 clips.

**NOTE**

- Install the under cover clips in the holes on the left and right side of the fender apron screw.
- The letters "LH" are on the back of the left side front floor under cover.

- B. Install the under cover (for rear side) with 2 clips.

3. Repeat step 2 to install the right floor under cover.

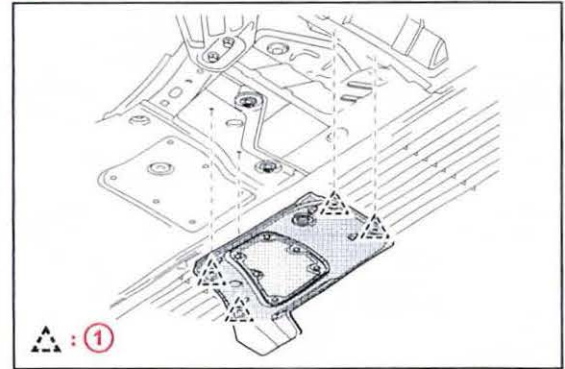**Figure 2.**

1	Clip
---	------