


Front Floor Under Cover Installation During PDS

Service Category General

Section Pre-Delivery Service

Market USA

Lexus Supports
ASE Certification 

Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2015	LS460, LS600H	

Introduction

The front floor under cover set (right and left floor under covers and 8 clips) is loaded in the luggage compartment at the assembly plant to avoid damage during transit.

Install the front floor under covers during Pre-Delivery Service (PDS).

Warranty Information

OP CODE	DESCRIPTION	TIME	OFP	T1	T2
N/A	Not Applicable to Warranty	–	–	–	–


Installation Procedure

1. Remove the 2 clips from the center floor under cover.

HINT

Dispose of the original clips. They will NOT be reused.

Figure 1.

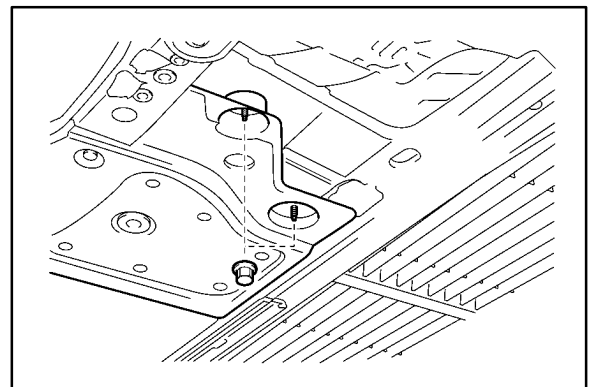

Front Floor Under Cover Installation During PDS

Installation Procedure (Continued)

2. Install the left side front floor under cover.
 - A. Install the under cover (for front side) and the fender apron with 2 clips.


NOTE

- Install the under cover clips in the holes on the left and right side of the fender apron screw.
- The letters "LH" are on the back of the left side front floor under cover.

- B. Install the under cover (for rear side) with 2 clips.

3. Repeat step 2 to install the right floor under cover.

Figure 2.

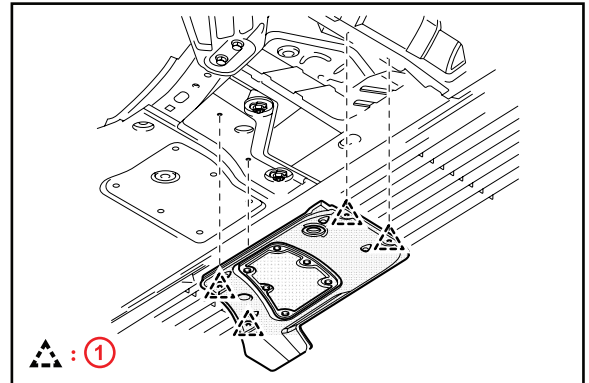

1	Clip
----------	-------------