

# Front Wheel Opening Extension Pad Installation During PDS

**Service Category** General

**Section** Pre-Delivery Service

**Market** USA

Lexus Supports ASE Certification 

## Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2015	ES300H, ES350	

## Introduction

The front wheel opening extension pad set (right and left front wheel opening extension pads, 2 tapping screws) is loaded in the luggage compartment at the assembly plant to avoid damage in transit. Install the front wheel opening extension pads to the vehicle during Pre-Delivery Service (PDS).

## Warranty Information

OP CODE	DESCRIPTION	TIME	OPF	T1	T2
N/A	Not Applicable to Warranty	–	–	–	–


## Installation Procedure

1. Remove the 2 self-tapping screws from the left front engine under cover.

**NOTE**

The removed self-tapping screws will be reused.

**Figure 1.**

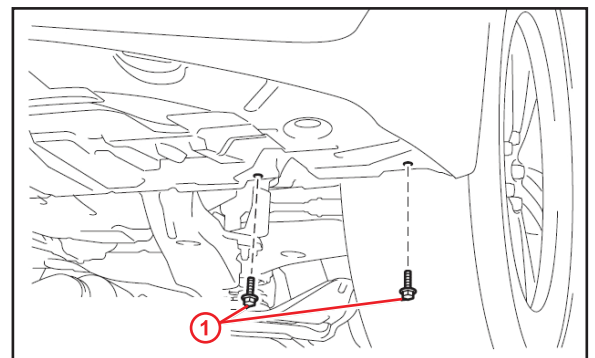

<b>1</b>	<b>Tapping Screw</b>
----------	----------------------


## Front Wheel Opening Extension Pad Installation During PDS

### Installation Procedure (Continued)

2. Place the left front wheel opening extension pad in position. Using the 2 original self-tapping screws and 1 of the provided self-tapping screws, install the extension pad by tightening the 3 self-tapping screws as shown in Figure 2.

**NOTE**

There is a distinguishable mark on each pad that identifies the right and left side.

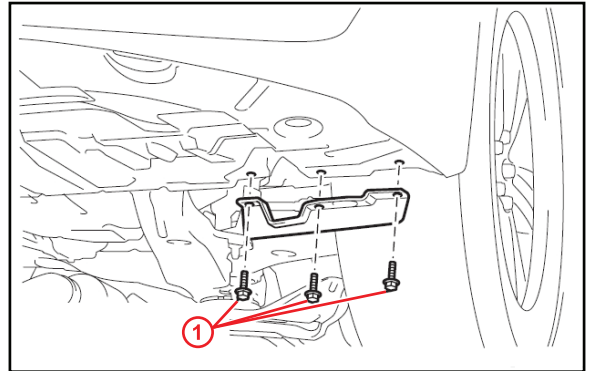**Figure 2.**

<b>1</b>	Tapping Screw
----------	---------------

3. Repeat steps 1 and 2 to install the right front wheel opening extension pad.