

Group:	99 – Miscellaneous
Bulletin No.:	SB-14-005
Issue Date:	6-19-2014

TECHNICAL SERVICE BULLETIN

2011MY-2015MY Conventional Keyless Entry Programming

SUBJECT VEHICLES:

2011MY – 2015MY Conventional models equipped with keyless entry


CONDITION:

The following procedure is for programming the keyless entry remote control(s) for trucks that are equipped with keyless entry system.

NOTE: When adding one remote control the process will over right the previously programmed remote(s).

1. Sit in the driver’s seat with no key in the ignition cylinder, with all doors closed and lock the driver’s door using the door lock knob.


Unlock the driver’s door using the door lock knob and open the door.

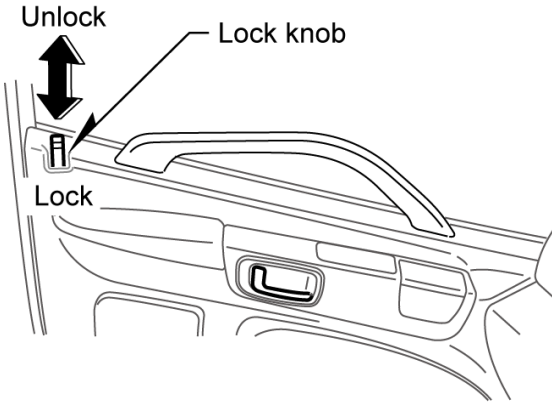

AT02-012A

2. Immediately after the driver’s side door is opened, insert the key into the ignition switch, cycle the ignition switch from LOCK to ON five times within 30 seconds and leave the ignition in the ON position.

Within four seconds from completion of cycling the ignition switch, press and hold the UNLOCK button on the remote control until the hazard lamps flash (five seconds).

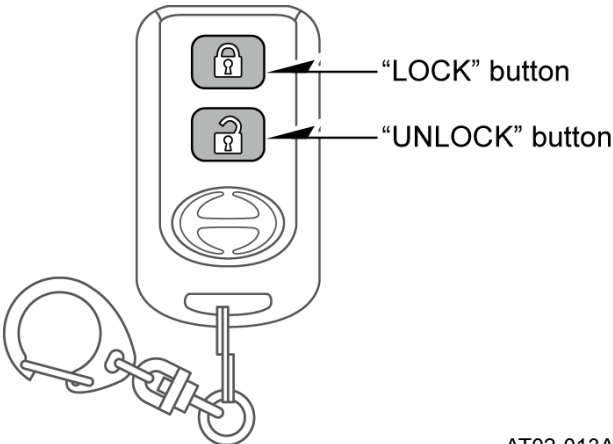

AT02-013A

Group:	99 – Miscellaneous
Bulletin No.:	SB-14-005
Issue Date:	6-19-2014

TECHNICAL SERVICE BULLETIN

3. When more than one remote control is being programmed, repeat step 2 above (up to three remotes can be programmed).

The number of hazard lamp flashes will indicate the number of remotes that are programmed. For example:

First Remote – Hazard light flashes once

Second Remote – Hazard light flashes twice

Third Remote – Hazard light flashes three times

Procedure Complete