



Quick tip

Version 1.0

Date: 06/20/2014

Spare Tire Mount Subwoofer / Sound box part number 000051419

Spare tire removal & storage



The following quick tips are only installation highlights. Please see the complete instructions and operator manuals included with each component, or available for download in ETKA.

- 1) When installing and securing the Soundbox, the spare tire assembly is removed from the wheel well. This spare tire assembly and related equipment should be left and secured in the trunk area of the vehicle and only removed by the end customer. Customers should remove the spare tire from the trunk area and stow it away from the vehicle prior to operating their VW model.
- 2) When removing the spare tire assembly, it is recommended an Emergency Tire Sealant & Pump be purchased. (ie Part Numbers: 8E0012619 and 8P0012615A or equivalent.) This equipment may also be required by law in some states.
- 3) The Jack and tool kit should be placed into the bags and placed alongside the subwoofer. Use storage solution part number 5G0601703 (2x) or equivalent.




Soundbox Flash files

- 1) The flash files can be downloaded from the link below.

<http://www.volkswagen-accessories.com/en/product-ranges/infotainment/soundsystem.html>

- 2) The SD card **must** be named. VW_SOUNDSYS and the downloaded files saved on the SD card.

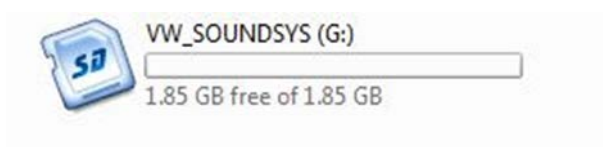

Note: The dealer programmer, demo switch, and SD card are each sold separately at additional cost. These components are only purchased once and kept by the Soundbox reselling dealer.

Programmer part number DKS 051 419A

Demo box part number DKS 051 419

SD card is sourced locally

Programming the Soundbox DSP unit



- 1) Connect the programmer and turn on the vehicle ignition. Select the proper file number by turning the dial. Press down on the dial to initiate the programming. The flash will take 5-10 seconds. The Soundbox is now ready for operation.