



Das Auto.

Service Information

Offboard Diagnostic Information System Service (ODIS Service) Number: VOS-14-30

Subject: ODIS Service Installation Phase 2 – Software Installation Date: Nov. 25, 2014
& Configuration Instructions

Supersedes VOS-14-17 due to revised installation process using 2 DVDs.

Table of Contents

Section	Page
1.0 Introduction - Must Read!	2
1.1 Installation Version Management - Must Read!	2
1.2 New Installations - Overview	2
1.3 Reinstallations - Overview	2
2.0 Preparation	3
2.1 Device and License Request Checklists	3
2.2 Hardware Prerequisites – All Installations	4
2.3 Reinstallations - Uninstall ODIS Service	4
3.0 Installation	5
3.1 Process Overview - Must Read!	5
3.2 Application Software & License Installation	5
3.3 Post-Setup - Diagnostic Data Installation	14
4.0 Post-Setup Configuration	17
4.1 Administration - General	17
4.2 Administration - Support	20
4.3 Administration - Connections	21
5.0 Post-Installation File Management & Back-Up	22
5.1 General Information	22
5.2 Backup Device Folder on USB Flash Drive	22
6.0 Online Updates	23
6.1 General Information	23



Das Auto.

Service Information

Notes:

- The following procedures must be performed **by qualified personnel only!** Please read these instructions in their entirety before performing these procedures. **If you do not understand these instructions, arrange to have a qualified person perform these procedures.**
- Heed all prerequisite requirements and notes. **Follow all instruction steps in the Section order given, including instructions cross-referenced in other documents posted on ServiceNet.**
- **Discard all printed copies of this document after use.** Revised versions may be issued at any time. Always check ServiceNet for the latest version.

1.0 – Introduction

This document describes the complete installation and configuration processes of **ODIS Service Installation Version 2.2.2 from a 2-DVD set** on eligible VAS diagnostic devices.

The installation options covered here are: **New installations** and **Reinstallations**.

Separate instructions for each installation option are covered throughout this document. Refer to **Subsections 1.1, 1.2 and 1.3** below for details on how to use these instructions.

1.1 – Installation Version Management

ODIS Service Installation Version 2.2.2 DVDs are intended specifically for New Installations on new devices or Reinstallations on existing devices to resolve malfunctioning software.

ATTENTION!

V2.2.2 DVDs are NOT update DVDs! Please do not use them to update existing ODIS Service installations that are already up-to-date and functioning normally.

1.2 – New Installations

New Installations are defined as installations on **new VAS diagnostic devices** where ODIS Service was not previously installed on Windows® 7.

ALL ODIS Service Installation Phases (1, 2 and 3) must be completed, in phase order, on all devices prior to using ODIS Service. All phase documents are posted on ServiceNet.

Look for the **New Installations** subsection titles and references throughout this document.

1.3 – Reinstallations

Reinstallations are defined as installations on **existing VAS diagnostic devices** where ODIS Service was previously installed on Windows 7, and the exiting license file is available for reinstallation.

Uninstallation of the existing software is always required prior to reinstallation.

Reinstallations may be necessary to resolve malfunctioning software.

Look for the **Reinstallations** subsection titles and references throughout this document.



Das Auto.

Service Information

2.0 – Preparation

2.1 – Device and License Preparation Checklists

Complete the device and license checklist for the installation option that applies:

✓	New Installations – Device and License Preparation Checklist
	New device - ODIS Service not previously installed: ☐ VAS 6150C laptop or ☐ VAS 6160A tablet
	All devices: ODIS Service Installation Phase 1 - Preparation & License Request Instructions (eShop) completed: ☐ License requested from eShop and license request approval email received ☐ License file downloaded from eShop to a folder on the diagnostic device desktop DO NOT proceed without the license file intended for the device!
	New Installations checklist completed. Proceed to Section 2.2 - Page 4.

✓	Reinstallations – Device and License Preparation Checklist
	Existing device - ODIS Service previously installed: ☐ VAS 6150A laptop ☐ VAS 6150B laptop ☐ VAS 6150C laptop ☐ VAS 6160 tablet ☐ VAS 6160A tablet
	☐ Windows 7 ☐ Existing license file saved in a folder on the diagnostic device desktop* or ☐ Existing license file backed-up on USB flash drive* *If the existing license file is not available, request a replacement license from eShop > Phase 1 Instructions
	Reinstallations checklist completed. Proceed to Section 2.2 - Page 4.



Das Auto.

Service Information

2.2 – Hardware and Network Prerequisites – All Installations

- ☐ **ODIS Service Installation** **Version 2.2.2 (2-DVD set) - Order No. 010.5002.02.21** on hand.
- ☐ Diagnostic device with functioning CD/DVD drive and USB.
- ☐ Diagnostic device plugged in to A/C power adapter and booted to Windows desktop.
- ☐ **VAS Diagnostic Tablets:** Device mounted in base station with mouse and keyboard connected.
- ☐ Confirm that a Windows 7 update **IS NOT** in the process of being downloaded or installed.
Go to: Control Panel > Windows Update to confirm!

2.3 – **Reinstallations** – Uninstall ODIS Service

ODIS Service must **always** be uninstalled prior to **reinstallations**. Use the procedure specified below.

Pre-uninstallation Tips:

- If you are unaware of, or have not recorded the **Email Outbox Server** configuration settings, please **note them now!** Go to: **ODIS Service > Admin > Support > E-mail outbox server ...** and record the various settings to re-apply during post-setup configuration.
- If the license file was **not** saved in a folder on the Windows desktop, or if the USB flash drive containing the backup license file is not available, copy the installed license to the Windows desktop **prior to uninstallation as follows:**
 1. From the Windows desktop, go to: **Windows (Start) > Computer > Local Disc (C:) > Program Files (x86) > Offboard_Diagnostic_Information_System_Service > license**
 2. **Right click** the license (.dat) file.
 3. Select **Copy**, and then close all windows.
 4. **Paste** the license on the Windows desktop (for retrieval during the installation routine) and revisit the **Phase 1 instructions, Section 3.5** for a suggested method to save the license file in a desktop folder.

Uninstall ODIS Service:

1. Go to: **Windows (Start) > All Programs > (ODIS Service) > ODIS Service Uninstallation Program** or uninstall ODIS Service using the applicable Windows “Add or Remove Programs” utility.
2. When prompted, check the boxes to **remove all licenses, MCD projects, diagnostic logs** etc. Scroll down in the prompt window and check all boxes as necessary.
3. Restart the diagnostic device when prompted.

☐ All Preparation steps completed. Proceed to [Section 3.0 – Page 5.](#)

Service Information


3.0 – Installation

3.1 – Process Overview


- ☐ The application and brand diagnostic database data are downloaded from the 2 installation DVDs
- ☐ The application is then installed from the download directory.
- ☐ The diagnostic database is then installed from the download directory as per the individual brand or multiple brands associated with the ODIS Service license file.


3.2 – Application Software & License Installation

1. Insert **ODIS Service Version 2.2.2 -Disc 1-** into the DVD-ROM drive.
2. **Wait** while the drive contents are read and the **DVD AutoPlays**.
3. Select **Run MULTI_DVD_windows_1_0_0.exe**:

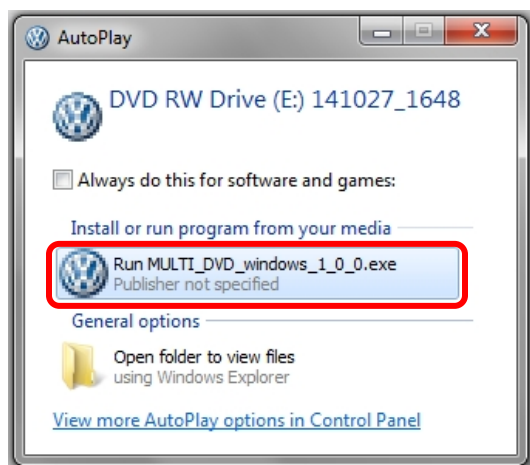

4. No actions needed:

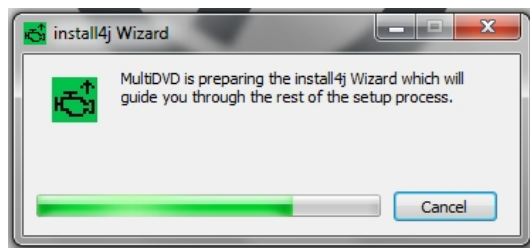

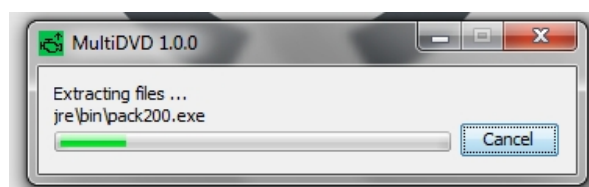

Continued... 6/

Service Information

5. Click **start unpacking**:



6. **Wait** while the data from **-Disk 1-** is downloaded (no action necessary):




The CD/DVD drive automatically ejects Disc 1 when its data is loaded.


Continued... 7/

Service Information


7. Remove Disc 1 from CD/DVD drive.
8. Insert **-Disc 2-** and select **OK**:

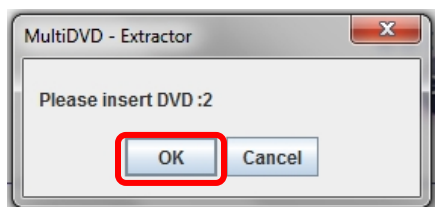


9. **Wait** while the data from **-Disk 2-** is downloaded.
10. Click **OK**:

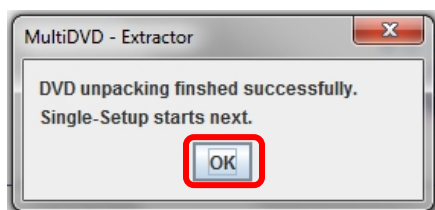

11. Remove Disc 2 from the CD/DVD drive.
12. No action needed:

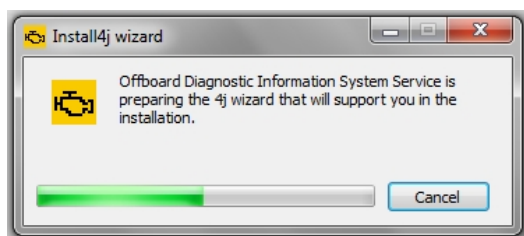

13. **Wait** until **Language selection** prompt appears as illustrated below. A 10 - 20 second delay is normal. Confirm **English (US)** is highlighted, and then click **OK**:

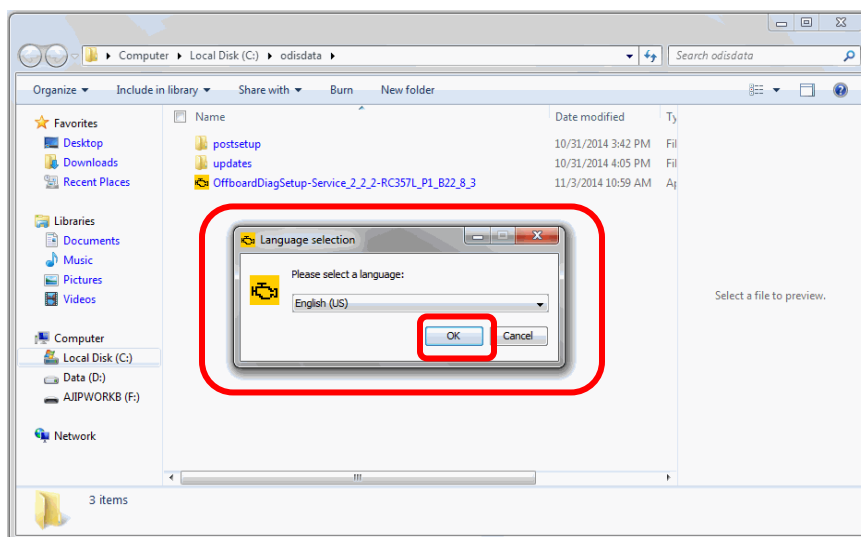


Note:

*If the Language selection prompt does not appear as illustrated after the delay, it may have launched **behind** the directory window. In this case, minimize the directory window or click the yellow ODIS Service (engine) icon on the lower toolbar to display the Language selection dialog.*


Continued... 8/

Service Information


14. Click **Next**:

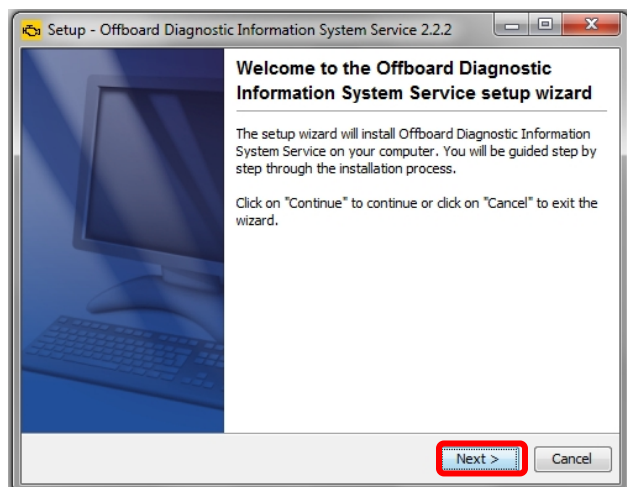

15. Click **Next**:

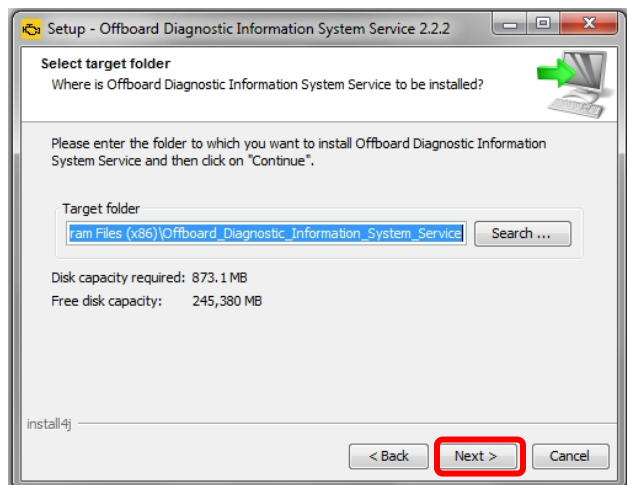

16. During **Reinstallations** a **Setup C:\Program Files...** prompt appears. Click **Yes**:

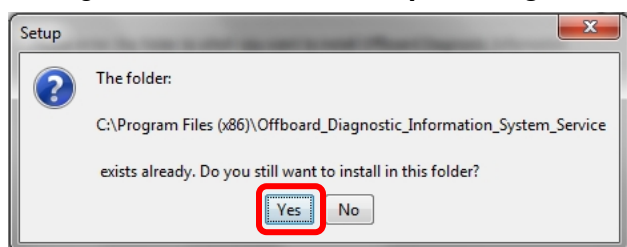


Continued... 9/




Das Auto.

Service Information

17. Click **Next**:

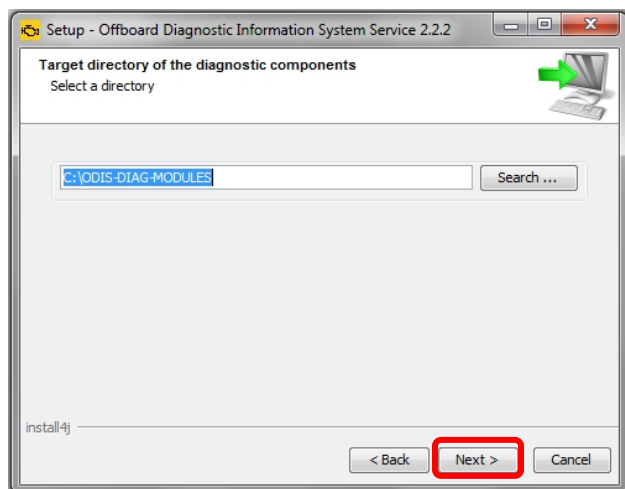

18. If additional user interface languages are desired or required, select them from the available dropdown(s). Click **Next**:

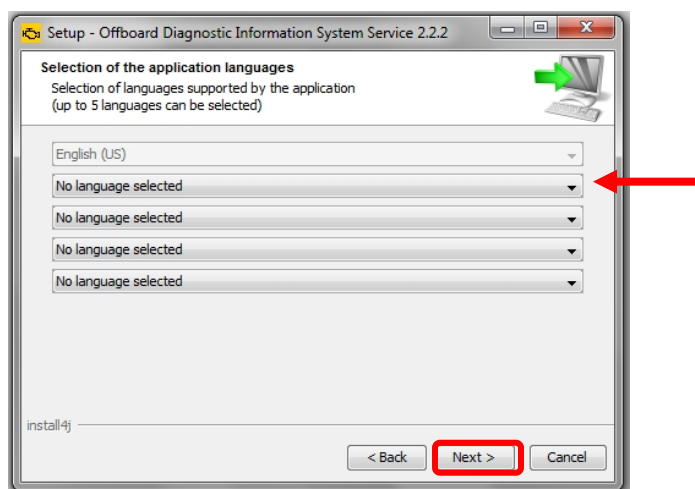

Note:

Selecting additional languages increases the installation time.


Notes:

- Steps 19 and 20 on the following page configure the installed software to the diagnostic device **model number**, and **diagnostic interface** (connection) method.
- If the **model number & interface method** are not selected correctly, an “Invalid License File” error may appear when starting ODIS Service.


Continued... 10/

Service Information

19. Carefully select the applicable **diagnostic device model number** from the **Target platform** dropdown menu, and then click **Next**:

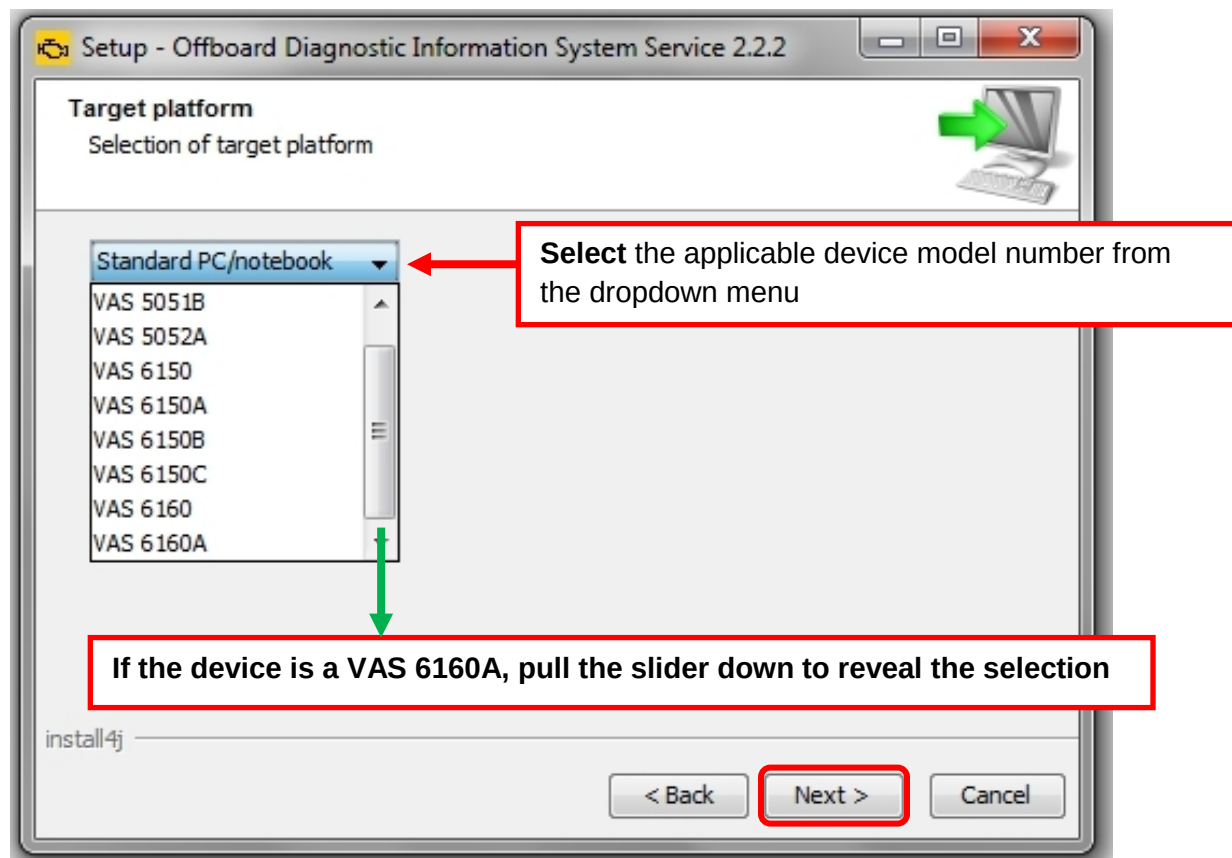


20. Confirm that the applicable **diagnostic interface (connection method)** appears. (Method illustrated is an example only. Your device and connection method may be different): Click **Next**:

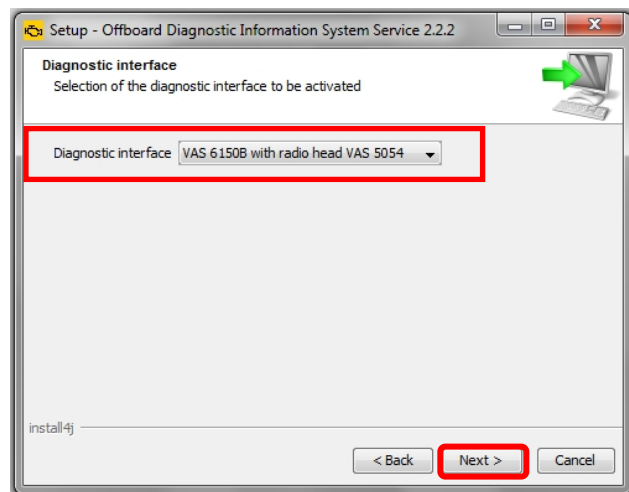


Continued... 11/

Service Information

21. Click **Next**:

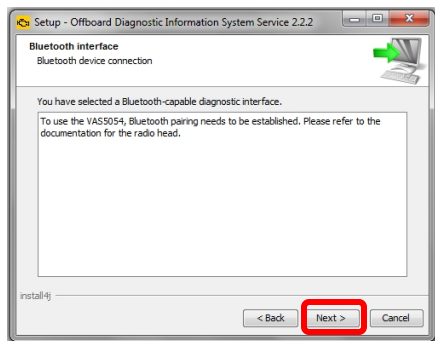


22. Ensure **Copy license to the license folder** is checked, and then click **Search...**:

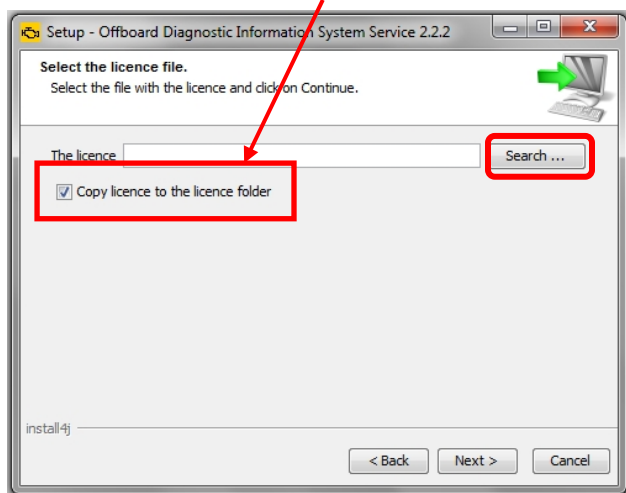

- ☐ **New Installations:** Open the **device folder** on the desktop, and **Open** the “**License**” subfolder with the **saved license file**, and then **continue from Step 23**.
- ☐ **Reinstallations:** Navigate to the desktop or other location (USB flash drive etc.) containing the **saved license file**, and then **continue from Step 23**:

23. **Select / highlight** the **license (.dat)** file (**DO NOT double-click**), and then click **Open**:

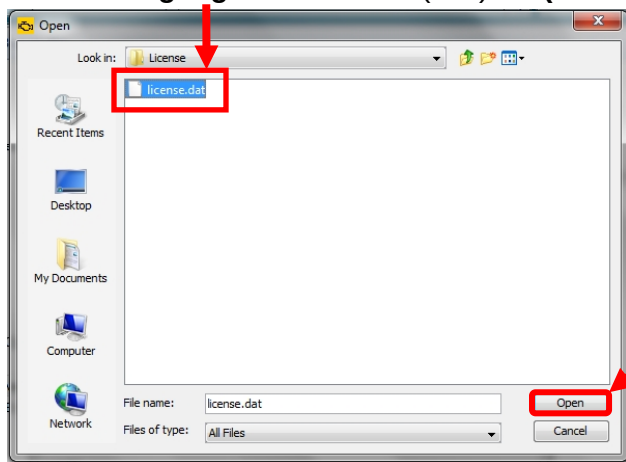


Note:
DO NOT double-click the **license file** in its saved location!


Continued... 12/

Service Information


24. Ensure the license file directory path is copied to the installation window. Click **Next**:

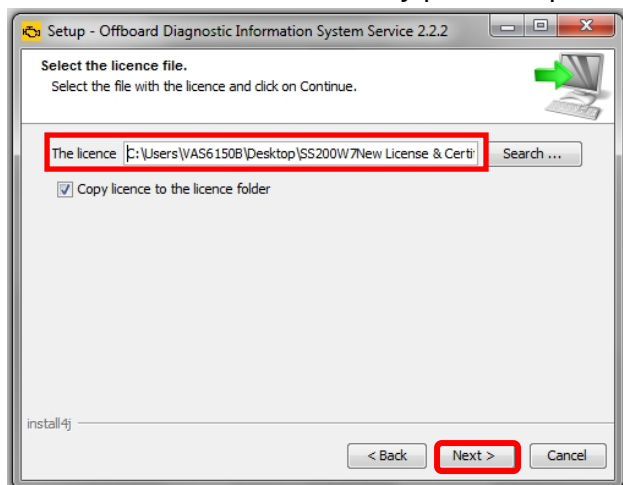

25. No action needed (**DO NOT** uncheck virtual keyboard). Click **Next**:

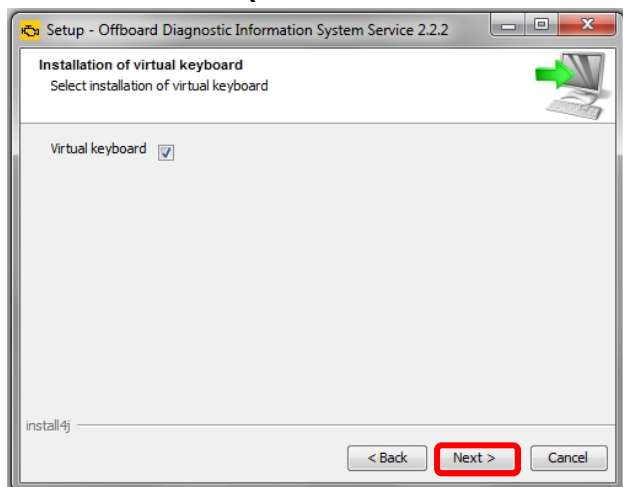


26. No action needed. Click **Next**:

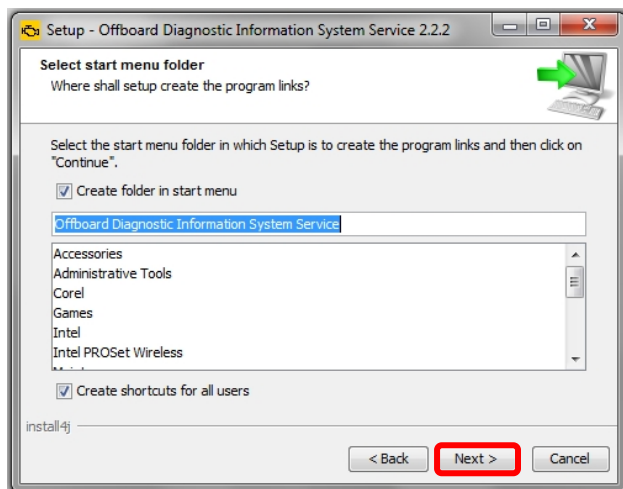


Continued... 13/

Service Information

27. **Wait** while several different phases of the installation take place:

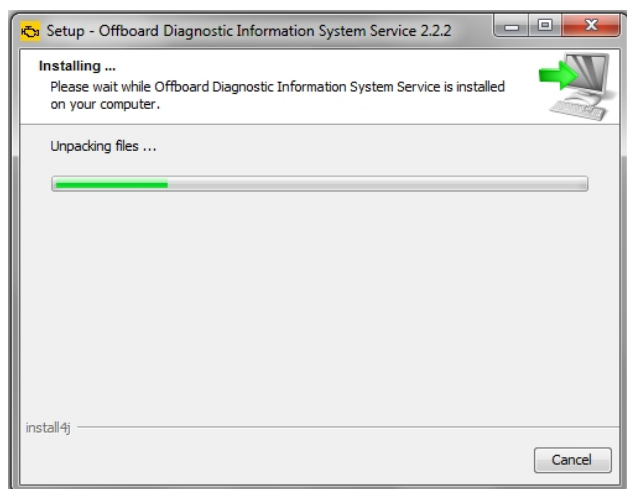

28. Click **Finish**:

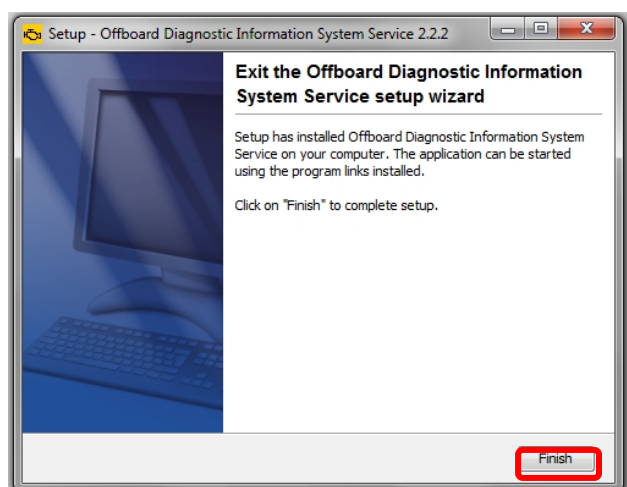

29. Close the CD/DVD directory Window.


Application Software & License Installation steps completed.
Proceed to [Section 3.3 – Page 14.](#)

Service Information


3.3 – Post-Setup - Diagnostic Database Installation

The first time ODIS Service is started after installation, the **Post-Setup Data installation** must be performed. This installs the brand-specific diagnostic data as per the installed license and selected language(s).


1. From the Windows desktop, locate and click the Offboard Diagnostic Information System icon:



2. **Wait** while the program starts:

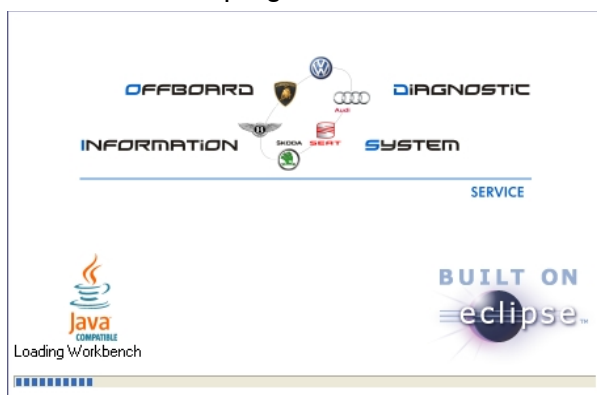


3. Click **Select local directory...**:

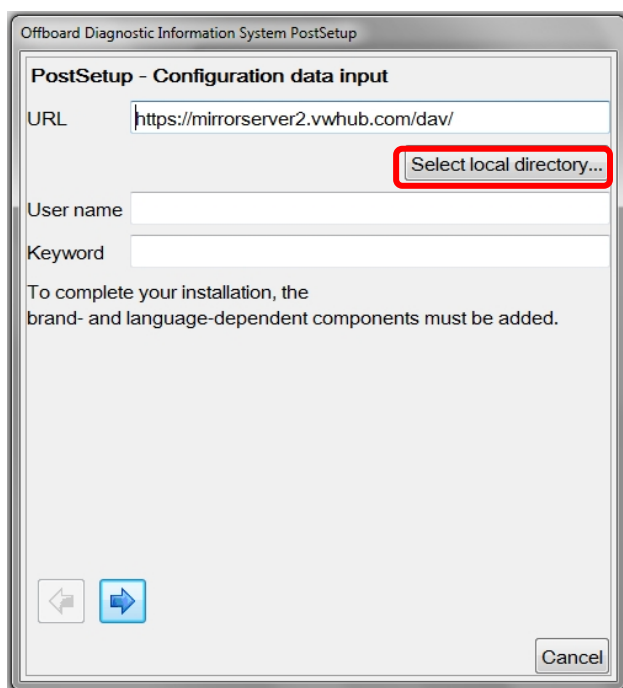


Continued... 15/

Service Information

4. Expand [▲] and navigate through the following directories: **Computer > Local Disk (C:) > odisdata**
5. **Select / highlight** the **postsetup** folder as illustrated, and then click **OK**:

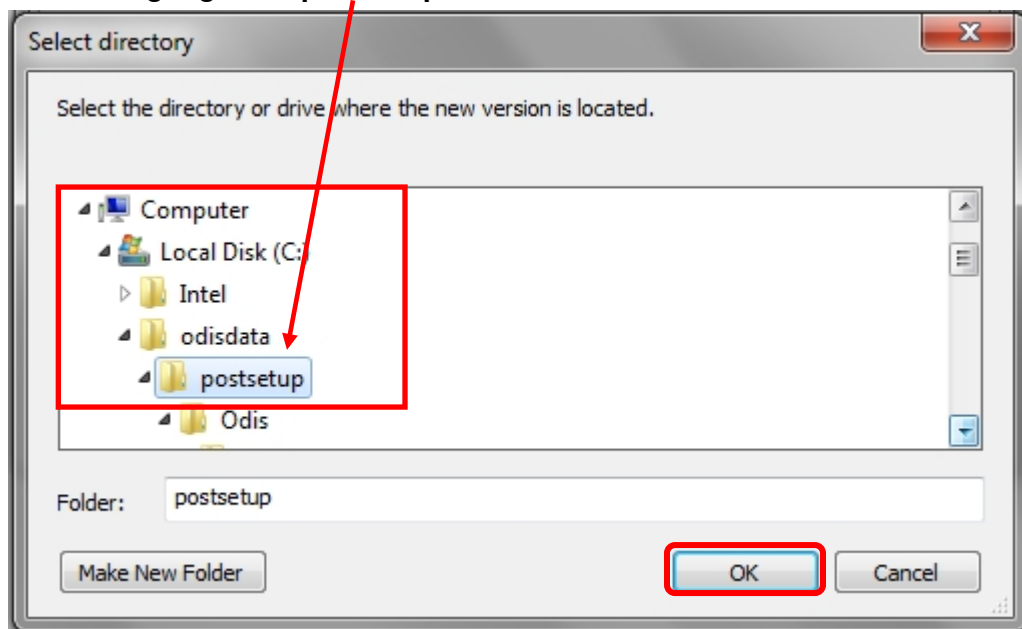

6. Confirm the **postsetup** directory path appears in the **URL** window as illustrated, and then click the blue **Forward Arrow** button:

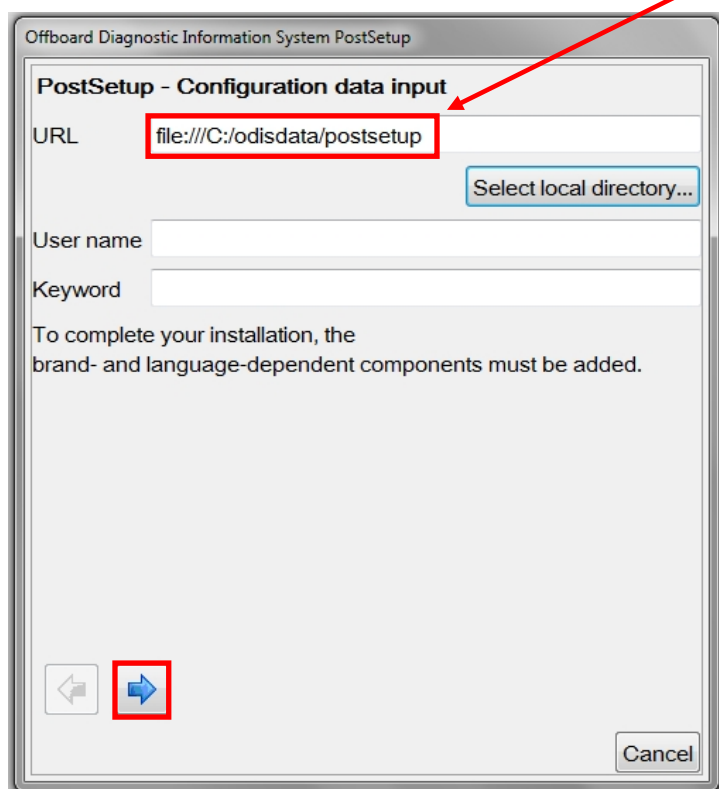


Continued... 16/




Das Auto.

Service Information

7. The postsetup diagnostic data is read and summarized. Click the blue **Forward Arrow** button again:

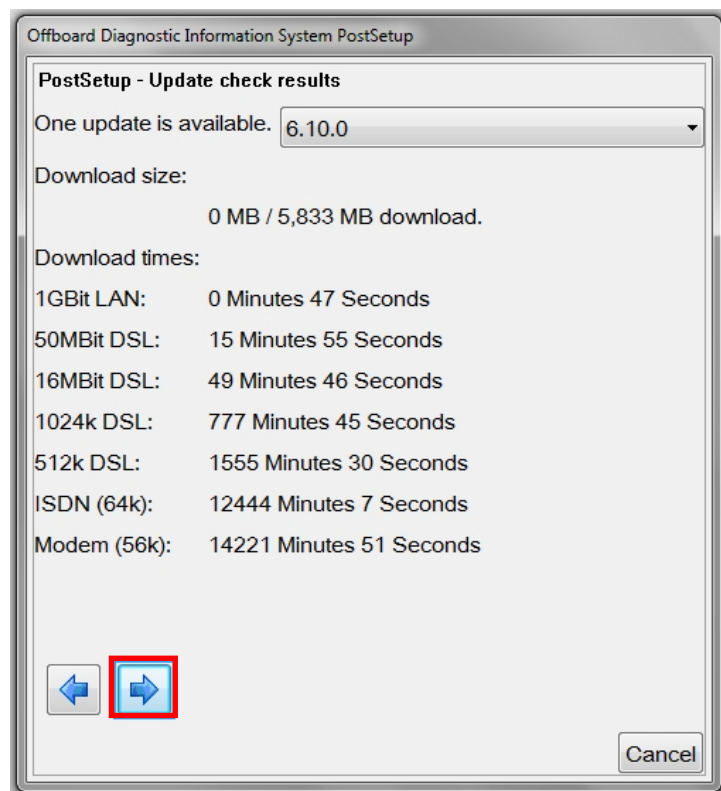

8. **Wait** while the diagnostic data installation takes place:

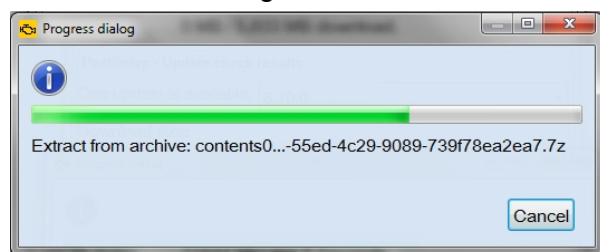

Note:

The **Progress dialog** window may appear to stall or lock at times during the data installation. This is normal. Please be patient!

The **ODIS Service main window** appears when the installation is complete.

The **VW brand design** is displayed by default.

8. Read and close the **Release Notes** window.
9. Read the **Warnings/notes** information, scroll down and click OK.

Postsetup – Diagnostic Data Installation steps completed. Proceed to [Section 4.0 – Page 17.](#)

Service Information

4.0 – Post-Setup Configuration


Prior to placing diagnostic devices with new installations or reinstallations into service, a number of configuration steps are required.

Configurations take place via the **Admin** operating mode. Settings can be changed at any time.

4.1 – Administration - General

The following subsections describe configurations using the **Admin > General** operating mode.

1. From the ODIS Service main screen, select **Admin**:

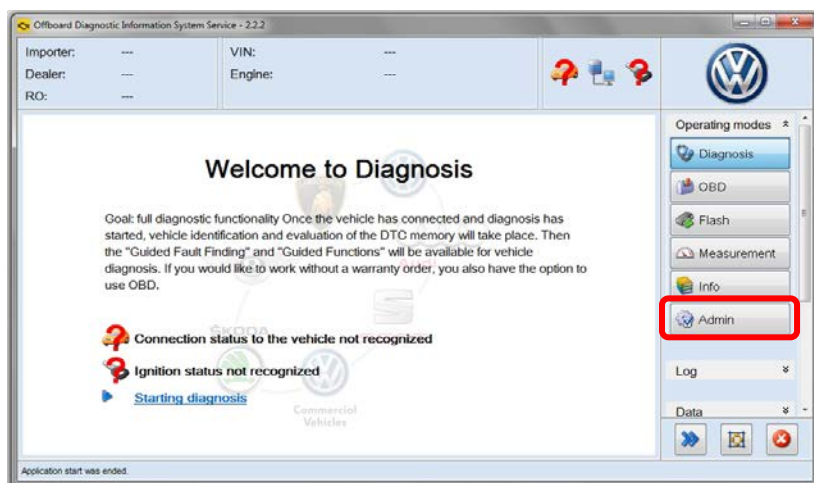


The available configuration function subcategories will be listed in the left-hand display menu.

4.1.1 – Brand Design

The **brand logo** and **user interface colors** are configured with the **Brand design** function.

1. Select **Brand design** and choose the desired brand theme from the dropdown menu. Click **Save / Yes**:

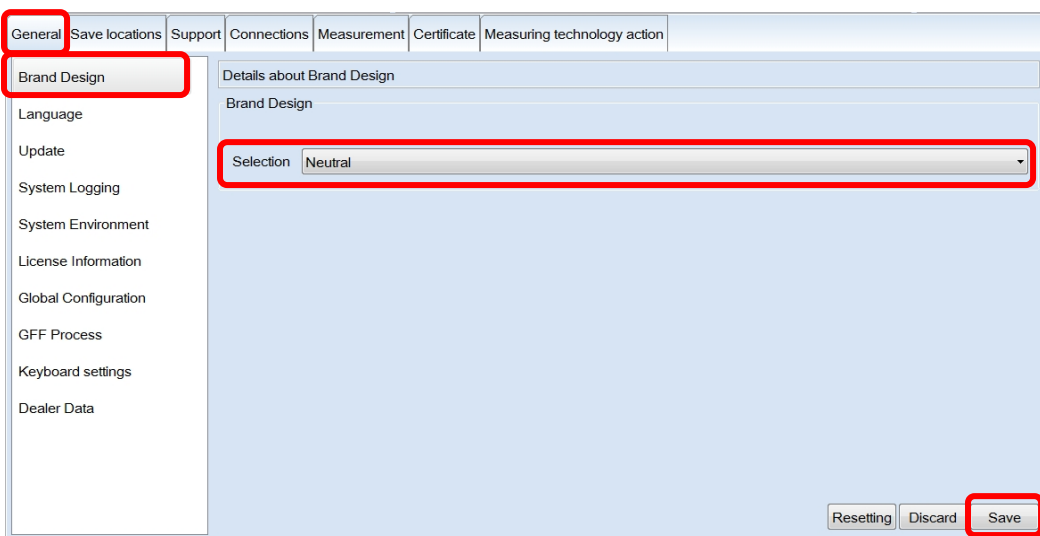

Continued... 18/


Service Information

4.1.2 – Language

The **language displayed by the user interface** is configured with the **Language** function.

If additional languages were selected during the software installation process, these languages are selectable here.


1. **Only if languages other than English (US) were added, select Language.** Then choose the desired language from the dropdown menu. Click **Save / Yes:**

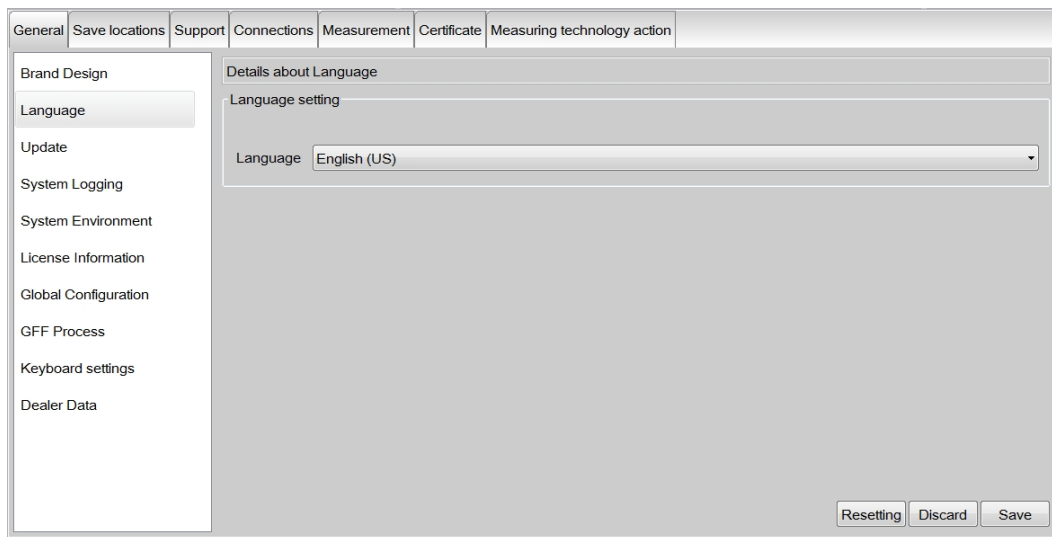

4.1.3 – Update

The **schedule for automatic updates** is configured with the **Update** function.

1. Select **Update**: Review the available update schedule settings:
2. Configure the update **cycle** and **time** appropriate for your facility: Click **Save / Yes:**

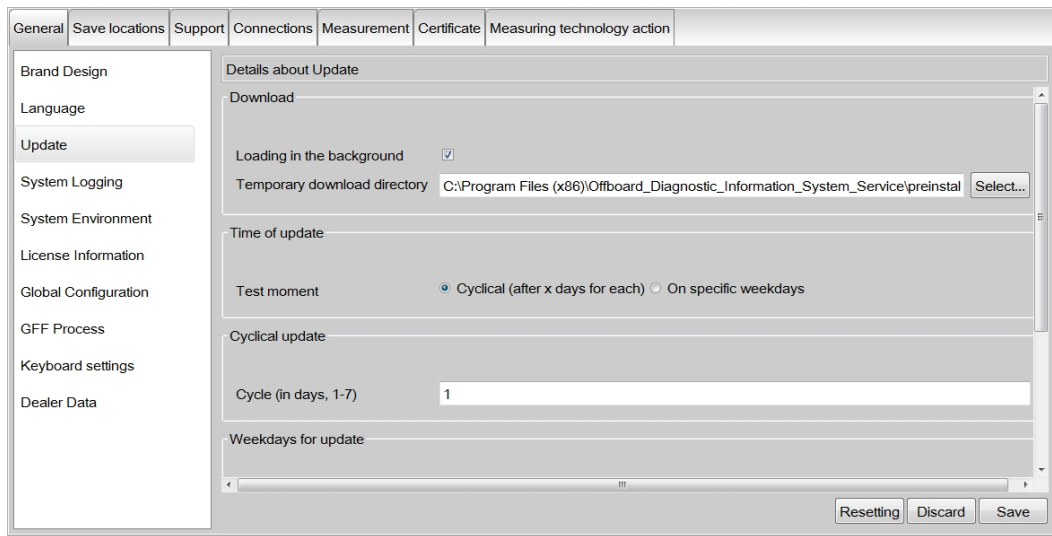

Note: For additional information refer to **Service Information – ODIS Service** document title: **Online Update Guide**



Das Auto.

Service Information

4.1.4 – Keyboard

If desired, the virtual keyboard can be switched **on or off** for as appropriate for the diagnostic device.

1. Select **Keyboard settings**: Place or remove a **checkmark** next to **Use the virtual keyboard**. Click **Save / Yes**:

General | Save locations | Support | Connections | Measurement | Certificate | Measuring technology action

Brand Design
Language
Update
System Logging
System Environment
License Information
Global Configuration
GFF Process
Keyboard settings
Dealer Data

Details about Keyboard settings

Virtual keypad

Use the virtual keyboard ☒

Resetting Discard Save

4.1.5 – Dealer Data

If desired, configure the name of the dealership to appear in diagnostic logs.

1. Select **Dealer data**: Enter the name of the dealership in the **Facility ID** entry field:

Note:

DO NOT exceed 100 characters including spaces. Exceeding the character allowance may cause GFF log transmissions to fail!

Click **Save / Yes**:

General | Save locations | Support | Connections | Measurement | Certificate | Measuring technology action

Brand Design
Language
Update
System Logging
System Environment
License Information
Global Configuration
GFF Process
Keyboard settings
Dealer Data

Details about Dealer Data

Dealer Data

Facility ID My Hometown Dealer

Resetting Discard Save

Service Information


4.2 – Administration - Support

The following subsections describe configurations using the **Admin > Support** operating mode.

4.2.1 – Contact Data

Contact information is saved as necessary for **Support Button** requests.


1. From the **Admin** operating mode main screen, select the **Support** tab: The **Contact data** section is displayed first by default: Fill in all contact details, including a valid email address: Click **Save / Yes**:

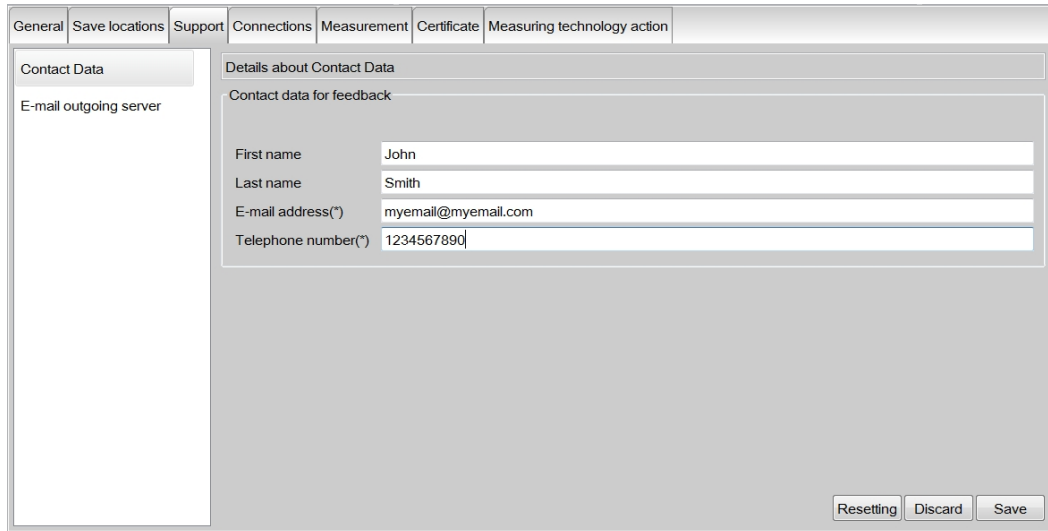

4.2.2 – Email Outbox Server

Dealership **network connection parameters** must be configured before using the **Support Button**.

1. Select **E-mail outbox server**: Enter or re-enter information as applicable and **specific to your dealership network**. Click **Save / Yes**:

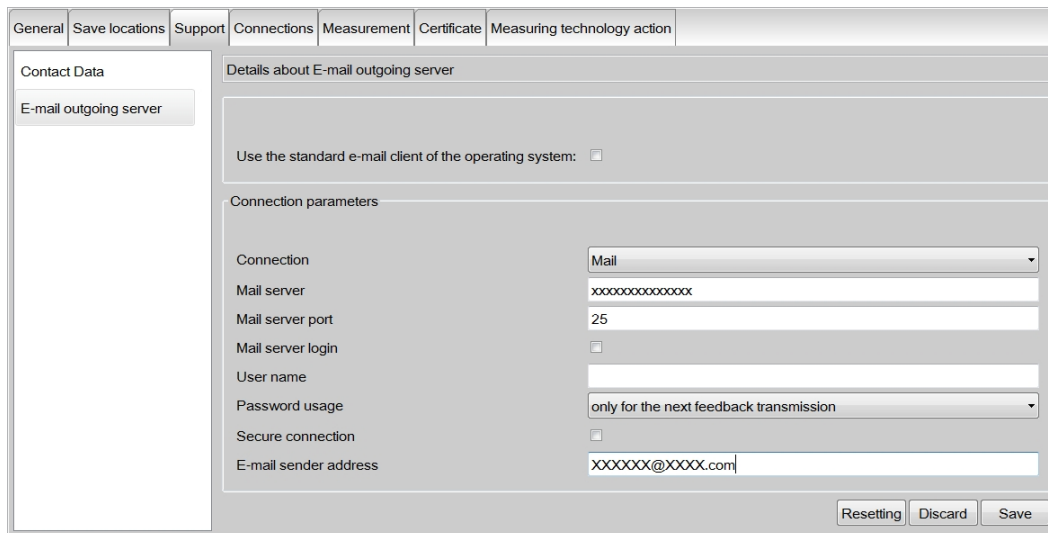

Note: For additional information refer to **Service Information – ODIS Service** document title: **ODIS Service Email Outbox Configuration Guide**



Das Auto.

Service Information

4.3 – Administration - Connections

The following subsections describe configurations using the **Admin > Connections** operating mode.

4.3.1 – Brand Settings Data

The connection to **VWAG Group systems** (to transmit GFF logs, etc.) is configured via **Brand settings**.

1. From the **Admin** operating mode main screen, select the **Connections** tab. The **Brand settings** data section is displayed first by default:

General | Save locations | Support | **Connections** | Measurement | Certificate | Measuring technology action

Brand Settings

Group system: Logon

Group System: GFF

Group System: ElsaPro

Group System: Carport

Group System: DISS

Group System: eShop

Mirror Server 2

Details about Brand Settings

Brand to configure

Selection: Audi

Connection types

for Audi: CPN

for Volkswagen: CPN

Resetting | Discard | Save

2. **Change the Connection type** in the dropdown menu(s) from **CPN** to **Internet**: Click **Save / Yes**:

General | Save locations | Support | **Connections** | Measurement | Certificate | Measuring technology action

Brand Settings

Group system: Logon

Group System: GFF

Group System: ElsaPro

Group System: Carport

Group System: DISS

Group System: eShop

Mirror Server 2

Details about Brand Settings

Brand to configure

Selection: Volkswagen

Connection types

for Audi: Internet

for Volkswagen: Internet

Resetting | Discard | **Save**



Das Auto.

Service Information

4.3.2 – Mirror Server 2

Please **confirm** the **Mirror Server 2 URL** specified for the US /CDN market:

1. Select **Mirror Server 2**.
2. **Confirm** the **Mirror Server URL** appears as: **https://mirrorserver2.vwhub.com/dav/**

The screenshot shows the 'Mirror Server 2' configuration window. The 'Mirror Server URL' field is highlighted with a red arrow pointing to the text 'https://mirrorserver2.vwhub.com/dav/'. The 'Mirror Server user' and 'Mirror Server password' fields are empty. The 'Timeout' field is set to 120 seconds. The 'Resetting', 'Discard', and 'Save' buttons are at the bottom right.

For **New Installations**:

- ☐ **Continue** with additional instructions in **Section 5.0** and **Section 6.0** that follow.
- ☐ Install the Security Certificate: Refer to **Service Information – ODIS Service** document title: **ODIS Service Installation Phase 3 – Security Certificate Request and Installation Instructions**

For **Reinstallations**: Refer to [Section 6.0 - Page 23](#) prior to returning diagnostic device to service.

☐ **Post-Setup Configuration steps completed. Proceed to Section 5.0 below as applicable.**

5.0 – Post-Installation File Management & Backup

5.1 – General Information

If ODIS Service is uninstalled and subsequently reinstalled, the **license file** that was initially downloaded from eShop to the diagnostic device desktop **must be reinstalled**. In these cases, the license file is simply retrieved from the **device folder** on the desktop of the diagnostic device during the reinstallation process. The device folder was created during installation Phase 1.

However, if recovery of the Windows operating system is necessary, both the **license and certificate** files are deleted from the desktop. In order to facilitate reinstallation of the license and certificate files after recovery, the **device folder created during installation Phase 1 must be backed-up on a USB flash drive**.

The backup USB flash drive is also used to download the security certificate from the eCRMS application during installation Phase 3.



Das Auto.

Service Information

5.2 – Backup Device Folder on USB Flash Drive

Note:

The following instructions are based on the **device folder** identification and record keeping method suggested in the **Phase 1 Instructions – Section 3.5**.

If an alternate record-keeping method was chosen, backup the license and certificate files accordingly and inform key service personnel.

Prerequisite:

- ☐ Diagnostic device license file downloaded from eShop to the **device folder** with “**License**” subfolder as per the **Phase 1 instructions, Section 3.5**.

1. **Obtain** empty USB flash drive or existing USB flash drive with existing backups.
2. **Insert** USB flash drive into an available port on the diagnostic device.
3. From the Windows desktop, **locate** and select the **device folder** (named with the device ID).
4. **Copy** the **device folder to the USB flash drive**, making sure that the device folder name identifies the device as being different from all other saved device folders (where applicable).
5. Retain the backup USB flash drive for the **security certificate download process during installation Phase 3**.

☐ Post-Installation Backup steps completed. Proceed to Section 6.0 Below.

6.0 – Online Updates

6.1 – General Information

The application software and diagnostic data installed with the latest “installation version” of ODIS Service was current as of the date of the DVD release. **However, revised and additional application and diagnostic data may have been released via online updates after the DVD release date.**

Dealerships are responsible for ensuring all diagnostic devices used on vehicles covered by new vehicle warranty are updated with the latest application and diagnostic data. As a result, we recommend the download and installation of applicable online updates prior to placing a new installation or reinstallation of ODIS Service into service.

For details on online update setup and functions, refer to **Service Information - ODIS Service** document title: **Online Update Guide**.