



Countries:	CANADA, UNITED STATES, MEXICO, PUERTO RICO	Document ID:	IK1200562
Availability:	ISIS, Bus ISIS, FleetISIS	Revision:	3
Major System:	ENGINES	Created:	12/17/2010
Current Language:	English	Last Modified:	2/6/2014
Other Languages:	Français , Español ,	Author:	Mario Tafoya
Viewed:	2315		

[Less Info](#)

Hide Details

Coding Information

Copy Link	Copy Relative Link	Bookmark	Add to Favorites	Print	Provide Feedback	Helpful	Not Helpful
		 View My Bookmarks				 187	 226


Title: MaxxForce 7 Turbocharger Mounting Bolts

Applies To: 2010 MaxxForce 7 engines beginning with engine serial number 6.5HM2Y53XXXXX

DESCRIPTION

Anytime the the turbocharger has been removed from the engine, the (2) M10 x 55 bolts must be discarded when removed. Loctite 620™ must be applied to the threads of new bolts that are supplied in the installation kit prior to installation . Torque the bolts to the proper specification as outlined in Dual Turbocharger installation in EGES-480.



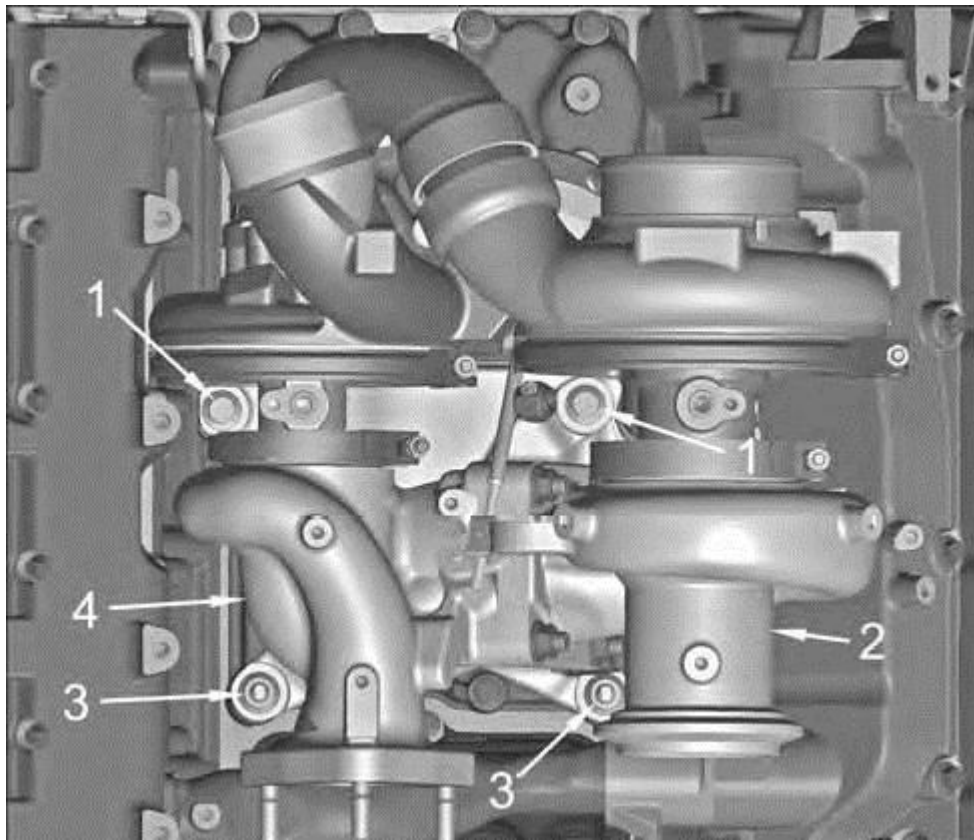

- 1. M10 x 55 bolt (2)
- 2. Low-pressure turbocharger assembly
- 3. M10 nut (2)
- 4. High-pressure turbocharger assembly



Hide Details

Feedback Information

Viewed: 2314

Helpful: 187

Not Helpful: 226

No Feedback Found