



SB-10056134-4570

SERVICE BULLETIN

Classification: EL14-034	Reference: NTB14-072	Date: July 30, 2014
-----------------------------	-------------------------	------------------------

2014 ROGUE; TARGET BOARD PLACEMENT FOR REAR CAMERA CALIBRATION


APPLIED VEHICLES: 2014 Rogue (T32)

SERVICE INFORMATION

When performing Rear View Camera calibration, use the corrected specification (Sd) for positioning the targets.

NOTE:

- The Rear View Camera monitors the traveling lane. It transmits the camera image signal to around view monitor control unit for the Lane Departure Warning (LDW) system.
- The specification in the Electronic Service Manual (ESM), Section **DAS – Driver Assistance Systems**, for positioning the Rear View Camera Targets are incorrect. Use the corrected specification (Sd) listed below.

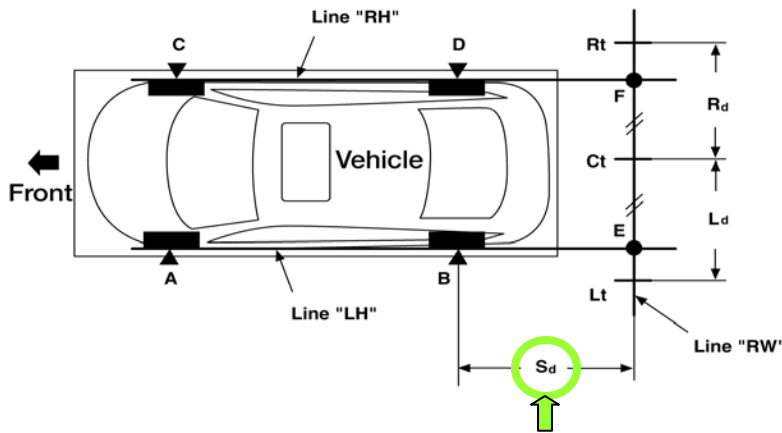

Side distance (Sd): "B"–"E" ("D"–"F"): **2194 mm (86.38 in)**

Left distance (Ld): "Ct"–"Lt": 1500 mm (59.06 in)

Right distance (Rd): "Ct"–"Rt": 1500 mm (59.06 in)

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.