File in Section:

Bulletin No.: PI1165

Date: February, 2014

## PRELIMINARY INFORMATION

Subject: Information on Headlamp Tool Supplied in Tool Kit

Models: 2014 Chevrolet SS


**Condition/Concern** 



3702973

Some customers may comment that the vehicle comes with a supplied tool but they are unaware what the tool is used for. This tool is stored with the emergency tire sealant and air compressor kit, or with the jack and wheel wrench package. The tool locations are detailed below.

## **Tire Inflator Kit**

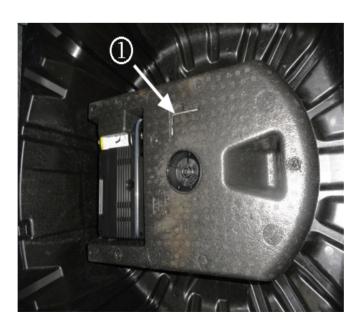

The tool (1) is stored in the foam container in the trunk, under the floor carpet.

## Spare wheel and Jack



Open the spare tire lid and remove the spare tire.



Remove the plastic jack retainer (1).

3702978

3702980



3702983

The tool (1) is stored in the underside of the jack retainer.

## **Recommendation/Instructions**

The vehicle has a torx tool for use when replacing the headlamp or front turn signal bulbs. The tool is used to remove the forward screws in the front wheelhouse liner in order to gain access to the rear of the front lamps.

Please share this information with the customer, including a copy of this message.