

D/C Cut Fuse Installation during PDS

Service Category General

Section Pre-Delivery Service

Market USA

Lexus Supports
ASE Certification 

Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2016	NX200T, NX300H	

Introduction

To minimize battery discharge during transportation and storage, the D/C Cut fuse (20A) has been removed at the assembly plant, and temporarily stored in the blank space of the relay block in the engine compartment.

During Pre-Delivery Service (PDS), reinstall the D/C Cut fuse into its original location.

Warranty Information


OP CODE	DESCRIPTION	TIME	OFFP	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-

D/C Cut Fuse Installation during PDS

Installation Procedure

Remove the D/C Cut fuse (20A) from the blank space of the relay block in the engine compartment and install it in the location shown in Figure 1 during Pre-Delivery Service (PDS).

Figure 1.

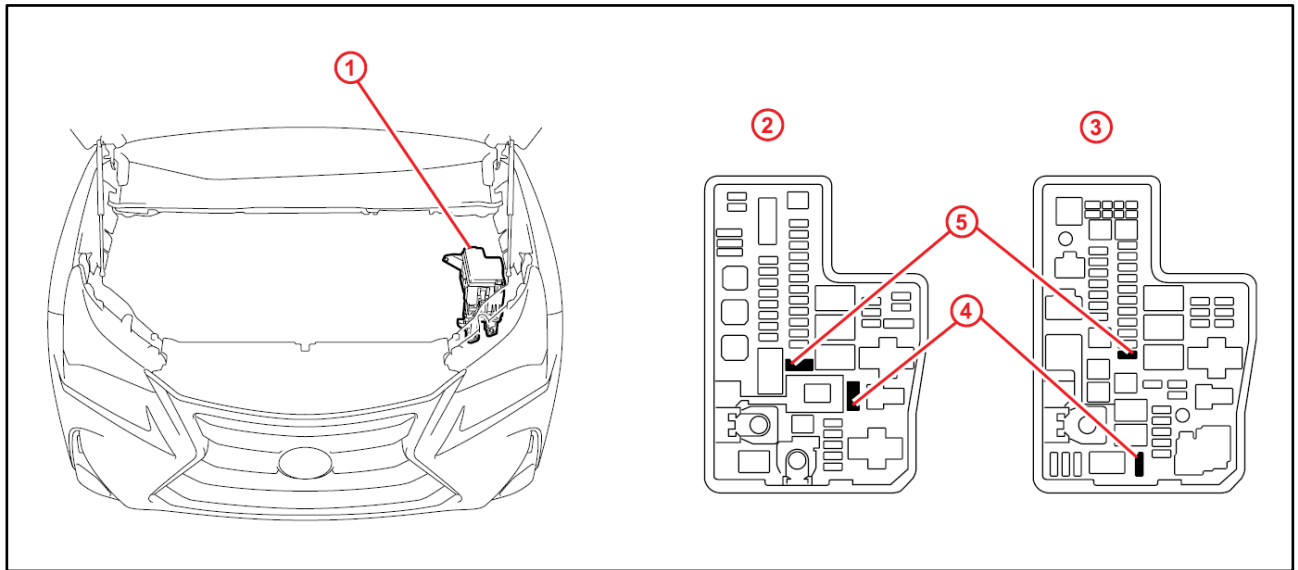

1	Relay Block
2	For Hybrid Vehicles
3	For Gasoline Vehicles

4	Remove this D/C Cut Fuse (20A)
5	Install D/C Cut Fuse (20A) Here (Original Location)

NOTE

While the vehicle is stored at the dealership, disconnect the negative (-) battery terminal to prevent battery discharge. Refer to Service Bulletin No. [PG001-06](#), "Battery Maintenance for In-Stock Vehicles & Pre-Delivery," for battery maintenance information.