

Front License Plate & Mounting Bracket Installation

Service

Category General

Section Pre-Delivery Service Market USA



Applicability

| YEAR(S) | MODEL(S) | ADDITIONAL INFORMATION |
|---------|---------------|------------------------|
| 2016 | RX350, RX450H | |

Introduction

The front license plate mounting bracket and 2 self-tapping screws for the 2016 model year RX 350 and RX 450h are stored in the glove compartment of the vehicle. Install the license plate and mounting bracket during Pre-Delivery Service (PDS).

Warranty Information

| OP CODE | DESCRIPTION | TIME | OFP | T1 | T2 |
|---------|----------------------------|------|-----|----|----|
| N/A | Not Applicable to Warranty | _ | - | - | _ |

(L) L-SB-0067-15 October 7, 2015 Page 2 of 3

Front License Plate & Mounting Bracket Installation


Installation Procedure

1. Align holes "A" of the mounting bracket with the dimples on the front bumper cover. Mark the location of holes "B" on the front bumper cover.

NOTE

- Holes "A" are used to install the mounting bracket to the bumper cover.
- Holes "B" are used to install the front license plate to the mounting bracket.

Figure 1.

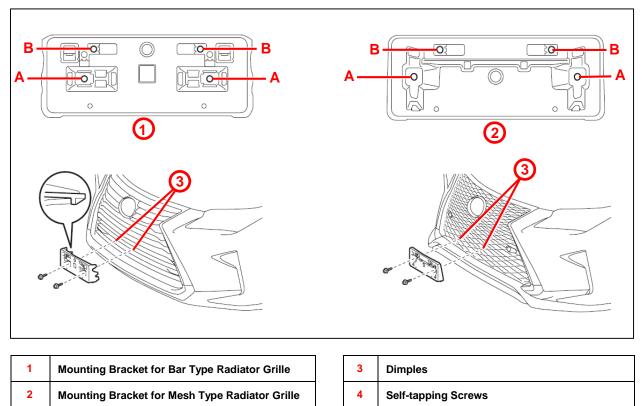

2. Screw the two self-tapping screws directly into the dimples to install the front license plate mounting bracket.

NOTE

- Do NOT pre-drill holes in the dimples.
- Do NOT over-tighten the self-tapping screws

Front License Plate & Mounting Bracket Installation

Installation Procedure (Continued)

3. Install the front license plate using 2 non-corroding bolts with the following dimensions: Nominal Length: 15.0 mm (0.59 in.)

Diameter: 6.0 mm (0.24 in.)

Figure 2.


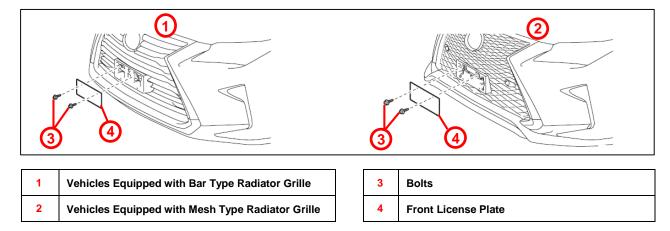


Figure 3.



| 1 | Nominal Length |
|---|----------------|
| 2 | Diameter |