



2009 TT / TTS

-	
A	_

Engine	Part	Part Number	Quantity
2.0L TFSI: BPY	Oil Filter	06D115562	1
	VW 502 00 Use synthetic oil SAE 5W-40, SAE-5W-30, or SAE-0W-40	N/A	4.5L (4.8qt)
	Drain Plug + Gasket	N 90813202	1
	Air Filter	06F133843A	1

Engine	Part	Part Number	Quantity
2.0L TFSI: CCTA	Oil Filter	06J115403Q	1
	VW 502 00 Use synthetic oil SAE 5W-40, SAE-5W-30, or SAE-0W-40	N/A	4.5L (4.8qt)
	Drain Plug + Gasket	N 90813202	1
	Air Filter	1K0129620D	1

Engine	Part	Part Number	Quantity
2.0L TFSI: CDMA	Oil Filter	06D115562	1
	VW 502 00 Use synthetic oil SAE 5W-40, SAE-5W-30, or SAE-0W-40	N/A	4.5L (4.8qt)
	Drain Plug + Gasket	N 90813202	1
	Air Filter	1K0129620	1

Engine	Part	Part Number	Quantity
3.2L VR6: CBRA	Oil Filter	071115562C	1
	VW 502 00 Use synthetic oil SAE 5W-40, SAE-5W-30, or SAE-0W-40	N/A	5.5L (5.8qt)
	Drain Plug + Gasket	N 90813202	1
	Air Filter	1K0129620	1

6-16-2015





2009 TT / TTS

Miscellaneous	Part	Part Number	Quantity
	Pollen Filter (20K Only)	1K1819653B	1
	Pollen Filter (20K Only)	TBD	1
Miscellaneous	Driver's Wiper Blade (Left)	8J1955425A	1
	Passenger's Wiper Blade (Right)	8J1955426A	1
	Battery	000915105CDDSP	1
	Battery	000915105DHDSP	1

6-16-2015

Executive Service

2009 TT / TTS



To reset the display

The dealership performing the service resets the display when the service has been completed. The display is reset as follows:

- Switch the ignition on.
- Pull the knob $\$ \Rightarrow fig. 2$, this message appears: **OIL CHANGE!**

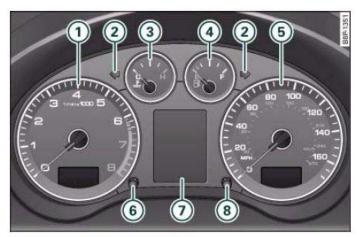


Fig. 2 Overview of the instrument cluster

- Pull the knob until the display **OIL CHANGE IN ----- MI (KM)--- DAYS** appears in the display. If the reset button is not pulled within 5 seconds, the display reset mode closes.



Tips

- If a malfunction is present (red symbol), the distance remaining cannot be called up.
- Do not reset the display between service intervals. Doing so will result in an incorrect display.
- If the battery is disconnected, the Service Interval Display values are retained.
- On vehicles with the Driver Information System, you can also call up the service interval display.
- If the service was not performed at the correct time or the service interval display was not reset after service was performed, the additional mileage driven or the elapsed days will be shown as negative numbers.

6-16-2015

© 2015 Audi of America, Inc. All rights reserved. Information contained in this document is based on the latest information available at the time of printing and is subject to the copyright and other intellectual property rights of Audi of America, Inc., its affiliated companies and its licensors. All rights are reserved to make changes at any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, nor may these materials be modified or reposted to other sites, without the prior expressed written permission of the publisher. All parts and service references provided in this document are subject to change and/or removal. Always check with your Parts Department and service manuals for the latest information.





TT and TTS 2009 FLUID CAPACITY CHART updated 25 June 2010

Vehicle (Sales Code)	Engine Oil approx. qty. w/filter change	Manual Trans	Auto Trans	Rear Final Drive	Cooling System	Power Steering	Brake System	A/C System	Windshield & Headlight Fluid
TT - FWD (8J352X) Coupe (8J952X) Roadster TT - quattro (8J359L) Coupe (8J959L) Roadster TTS - quattro (8J354L) Coupe (8J954L) Roadster	2.0 TFSI 200 hp (BPY) 4.5L (4.8 qt) Audi Oil Spec: VW 502 00 Use synthetic oil SAE 5W-40, SAE 5W-30 or SAE 0W-40 2.0 TFSI 200 hp (CCTA) 4.5L (4.8 qt) Audi Oil Spec: VW 502 00 Use synthetic oil SAE 5W-40, SAE 5W-30 or SAE 0W-40 2.0 TFSI 265 hp (CDMA) 4.5L (4.8 qt) VW Oil Spec: VW 502 00 Use synthetic oil SAE 5W-40, SAE 5W-30 or SAE 0W-40	N/A	6-Spd DSG (02E) New Fill: 6.9L (7.3qt) Change: 5.5L (5.8qt) approx. Oil PN G 052 182 A2* Bevel Box New Fill: 0.9L (1.0 qt) Oil PN G 052 145 S2*	OBR 0.95L (1.0 qt) Oil PN G 052 145 S2* Haldex Clutch New Fill: 0.85L (0.9 qt) Replacement: 0.7L(0.8qt/24oz) Oil PN G 055 175 A2*	9.0L (9.5 qt)*** 8.6L (9.1 qt)***	Electro- Mechanical (No Fluid)	1.0 L (1.1 qt) (approximately) VW Brake Fluid Specification: Use new fluid only. FMVSS 116 DOT 4 or SAE J 1703 Fluid PN B 000 750*	Refrigerant Use only R134a 525 ± 25g (4.5 ± 0.9 oz.) Refrigerant Oil Use a PAG oil with R134a 110 ± 10 cc (3.7 ± 0.3 fl.oz.)	4.0 L (4.3 qt) Fluid PN G 052 164*

For proper fluid level and filling information, see the Repair Manual and/or Maintenance Manual in ElsaWeb.

^{*} Oil and fluid part numbers are for reference only. Always check with your Parts Department for the latest part information.

^{**}Refer to Technical Bulletin 2010043 for engine oils that meet this Audi oil standard.

^{***} Audi Coolant Additive Specification and Part Number: (color is purple) G 12 plus-plus PN- G 012 A8G.





TT and TTS 2009 FLUID CAPACITY CHART updated 25 June 2010

Vehicle (Sales Code)	Engine Oil approx. qty. w/filter change	Manual Trans	Auto Trans	Rear Final Drive	Cooling System	Power Steering	Brake System	A/C System	Windshield & Headlight Fluid
TT – quattro Manual (8J3519) Coupe (8J9519) Roadster TT – quattro Auto (8J351L) Coupe (8J951L) Roadster	3.2L VR6 250 hp (CBRA) 5.5L (5.8 qt) Audi Oil Spec: VW 502 00 Use synthetic oil SAE 5W-40, SAE 5W-30 or SAE 0W-40	6-Spd (02Q) 2.3L (2.4 qt) Oil PN G 052 171 A2*	6-Spd DSG (02E) New Fill: 6.9L (7.3qt) Change: 5.5L (5.8qt) approx. Oil PN G 052 182 A2*	(0AV) 0.95L (1.0 qt) Oil PN G 052 145 S2* Haldex Clutch New Fill: 0.85L (0.9 qt) Change: 0.65L (0.7 qt) (22 oz) Oil PN G 055 175 A2* Bevel Box New Fill: 0.9L (1.0 qt) Oil PN G 052 145 S2*	12.7L (13.4 qt)***	Electro- Mechanical (No Fluid)	1.0 L (1.1 qt) (approximately) VW Brake Fluid Specification: Use new fluid only. FMVSS 116 DOT 4 or SAE J 1703 Fluid PN B 000 750*	Refrigerant Use only R134a 525 ± 25g (4.5 ± 0.9 oz.) Refrigerant Oil Use a PAG oil with R134a 110 ± 10 cc (3.7 ± 0.3 fl.oz.)	4.0 L (4.3 qt) Fluid PN G 052 164*

For proper fluid level and filling information, see the Repair Manual and/or Maintenance Manual in ElsaWeb.

^{*} Oil and fluid part numbers are for reference only. Always check with your Parts Department for the latest part information.

^{**}Refer to Technical Bulletin 17-08-27 (2010043) for engine oils that meet this Audi standard.

^{***} Audi Coolant Additive Specification and Part Number: (color is purple) G 12 plus-plus PN- G 012 A8G.