

Service Information

wiTECH™

Number: VWI-15-01

Subject: VCI Mini Pod Configuration

Date: Feb 24, 2015

1.0 – Introduction

The VCI Mini Pod is an optional replacement for the StarMobile® handheld device. It can be used via USB cable or the dealership Wi-Fi network.

Prior to first use via Wi-Fi, perform the configuration procedure outlined below.

2.0 – Procedure


Prerequisites:

- ☐ **wiTECH desktop client latest version installed**

To check and install the latest version, refer to **Service Information – wiTECH document title: wiTECH™ – Software Installation Instructions**

- ☐ VCI Mini Pod and USB cable

1. Connect VCI pod to PC via USB cable.
2. Open web browser.
3. In web browser address bar enter “172.22.22.22” (VCI Pod USB default IP). This will take you to the VCI Pod web configuration page.
4. Select **Wireless Settings**.

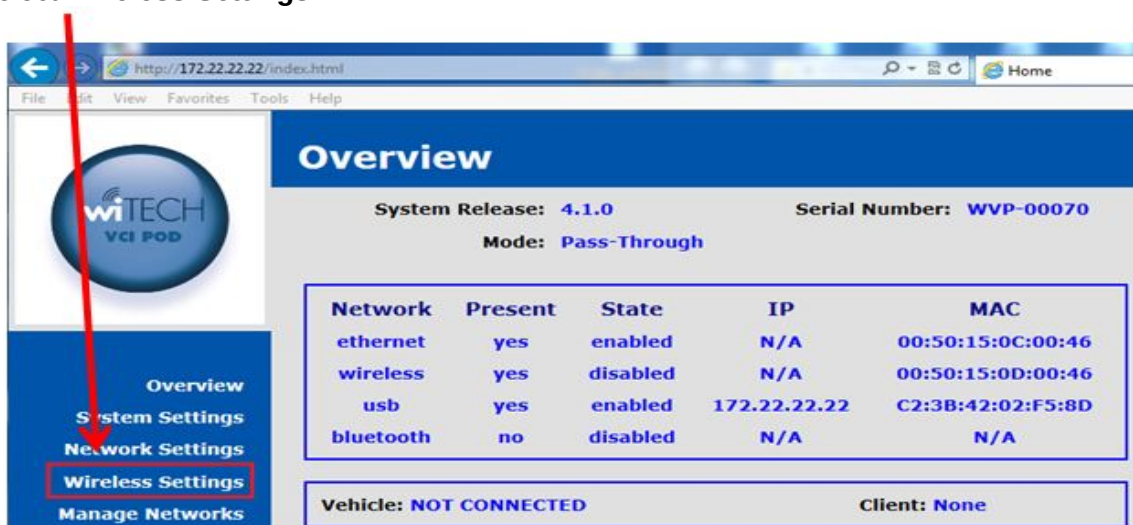

Continued... 2/



Das Auto.

Service Information

5. **Profile:** Confirm **default** is selected. If not, select **default** from the drop-down menu:

The screenshot shows the 'Wireless Settings' interface for the WiTECH VCI POD. The browser address bar displays 'http://172.22.22.22/index.html'. The page features a sidebar with navigation links: Overview, System Settings, Network Settings, Wireless Settings, Manage Networks, Wireless Scan, Proxy Config, Access Point Config, TCP/IP over USB, vrFlash, Software Upgrades, Factory Defaults, Backup Settings, and Help. The main content area is titled 'Wireless Settings' and includes a 'Profile' dropdown menu set to 'default'. Below this, there are radio buttons for 'Obtain an IP address from DHCP server' (selected) and 'Use the following IP address and settings'. The 'IP Settings' section contains input fields for IP Addr, Net Mask, Gateway, DNS 1, and DNS 2. The 'Type of Wireless Network' section has two options: 'Connect to an Access Point' (selected) and 'Connect to another computer using Adhoc network (not supported)'. The 'Security Settings' section includes an SSID field with 'wiTECH Network Name', a Security dropdown set to 'WPA PSK', and fields for Enter Key and Confirm Key. A note states 'Note: Key can only be saved when confirmed.' and there is an 'Edit Key' dropdown and a 'Use Key' dropdown.

6. **Type of Wireless Network:** Select **Connect to an Access Point**

Continued... 3/



Das Auto.

Service Information

7. Enter the **Security Settings** as follows:

- **SSID:** Enter the dealership SSID name.
- **Security:** Select the appropriate security type that your SSID uses
- **Enter Key:** This is the Network password/passphrase to your SSID: NOTE: This is case-sensitive entry.
- **Confirm Key:** Re-enter the Network password/passphrase correctly.

Notes:

- The SSID name and Security type illustrated above **are examples only!** The information required here is unique to your dealership network.
- Ask your dealership systems administrator or IT professional for assistance if necessary.


Continued... 4/




Das Auto.

Service Information

9. Select **Manage Networks**:

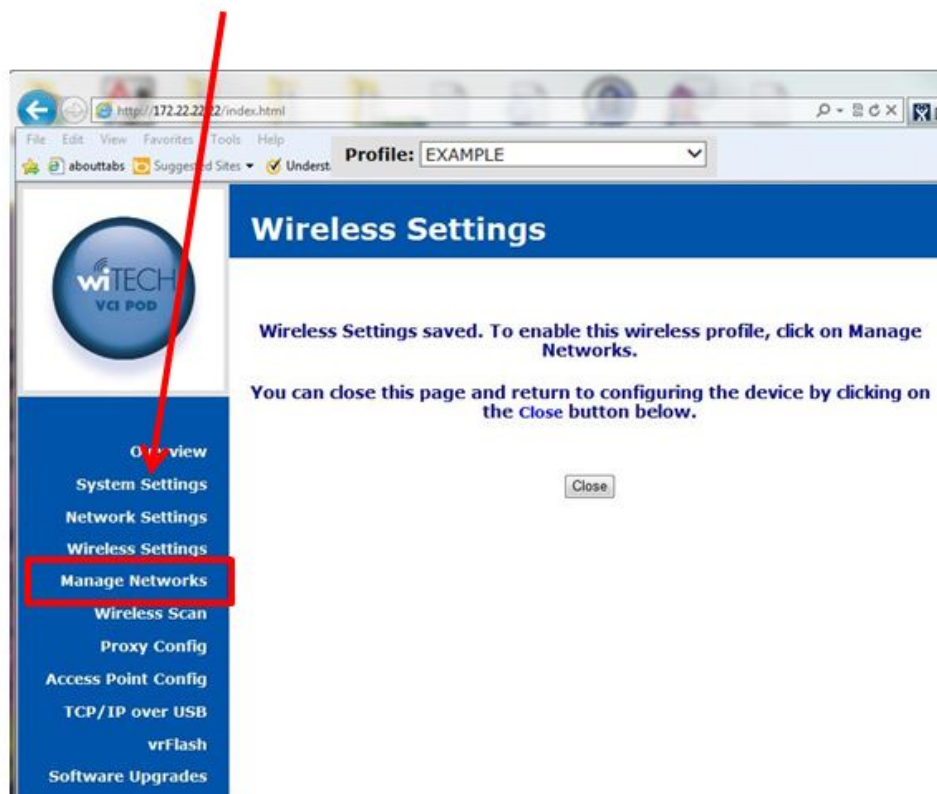

10. Select the radio button for the wireless interface.

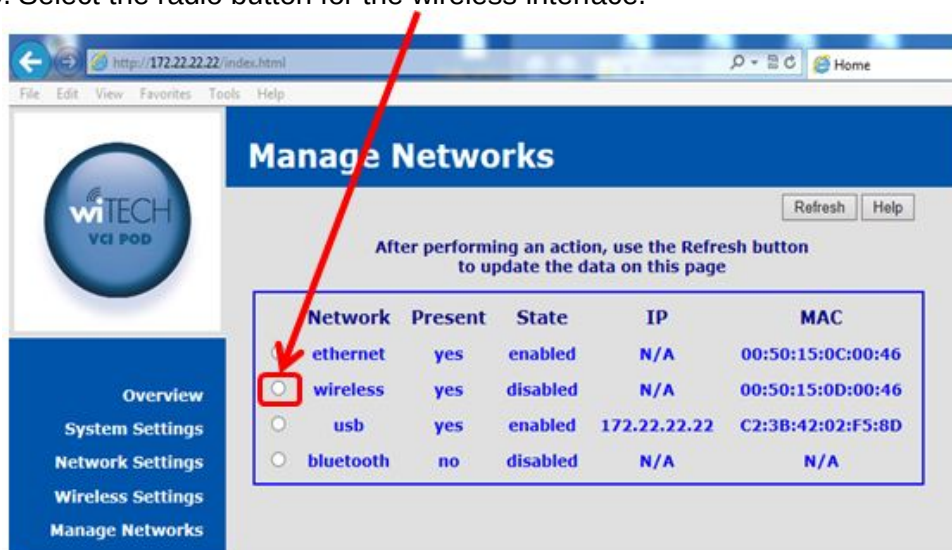

Continued... 5/




Das Auto.

Service Information

11. Under **Profiles** confirm **default** displays as **Currently Selected**.



12. Once the connection is complete the Status will display as Active (green). The device will also have an IP address. Please note that in some cases you may need to select the refresh button.

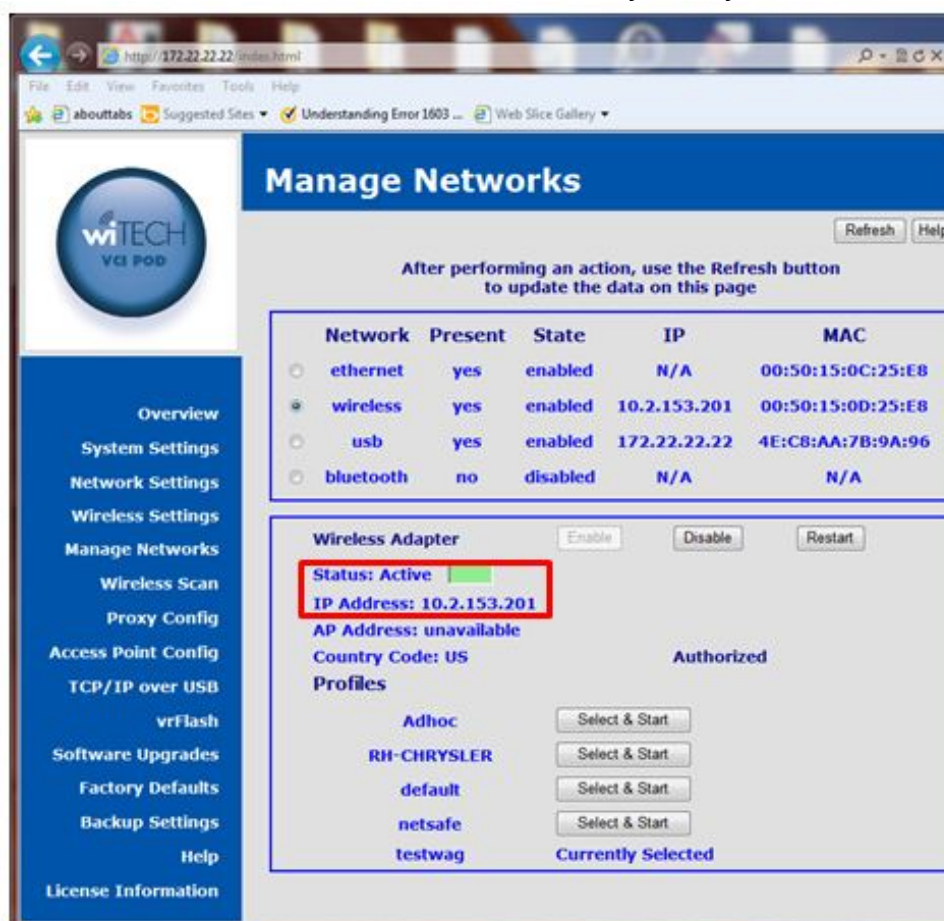


Continued... 6/



Das Auto.

Service Information

13. Launch the latest release of the wiTECH Application.

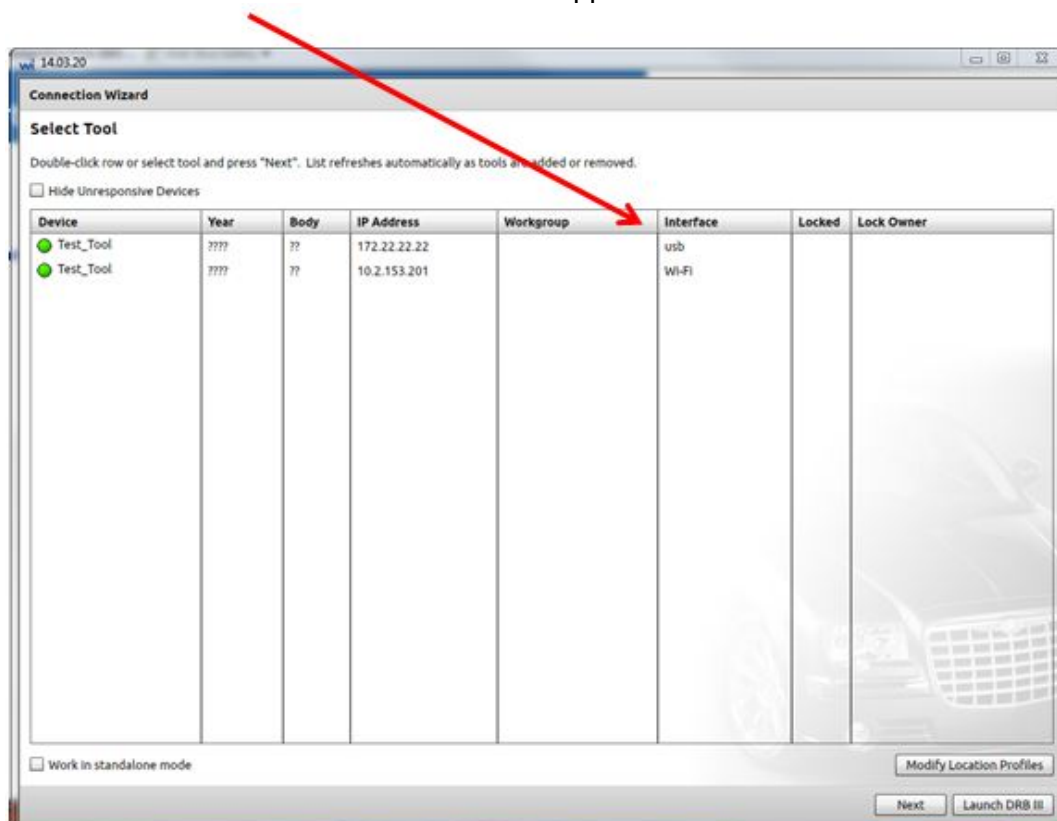

14. Review the Connection Wizard to confirm your device is displaying as available both wirelessly and USB.