

**SUBJECT****7 Series Front Plate Mounting****MODEL**

G12 (7 Series Sedan)

SITUATION

Front license plate mounting procedure may affect the Automatic Cruise Control (ACC).

CAUSE

Plate, standard front plate bracket, mounted below approved location, covers ACC sensor.


CORRECTION



Mount the front plate bracket to the vehicle at the approved level. **Do not install a dealer plate frame or any other accessory with this type of bracket mounting** as this would interfere with the function of the ACC sensor. (See Picture 4 below)

PROCEDURE

Standard plate mounted to front plate bracket (factory provided)

NOTE: The following procedure should be used in conjunction with G12 - Approved mounting of front license plate bracket (See Repair Instructions 51 11 157).

	<p>Note: The bracket is included with vehicle from factory (uninstalled).</p>
	<ol style="list-style-type: none"> 1. Mark the centerline of the front bracket.

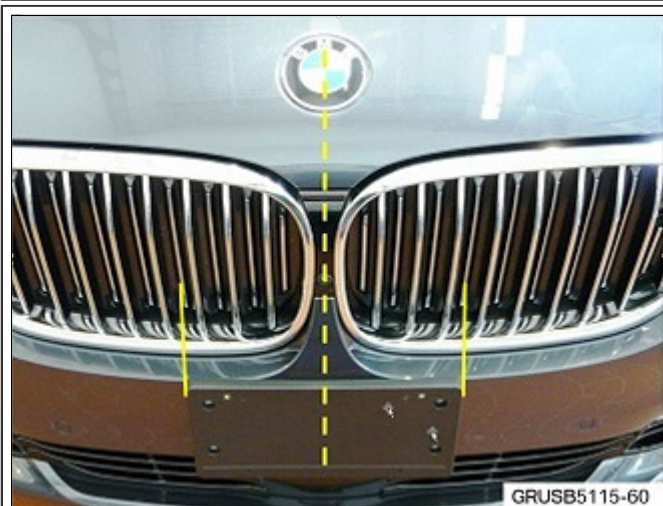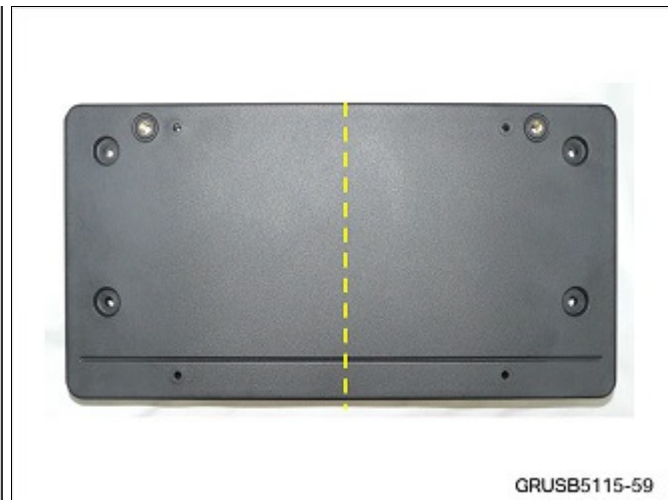

2. Use the centerline of the hood logo and align it with your centerline mark on the plate bracket.
3. Note: The outer edges of the bracket must align with kidney grill slats equally (approximately 3 ½ slats per side)



4. The approved bracket installation must look like the picture. This will provide the needed clearance for the ACC sensor (yellow arrow).

Note: Do not use an accessory or dealer plate frame with this type of bracket mounting.

WARRANTY INFORMATION

Installation of the front plate bracket is covered under the QC1.

[Copyright ©2015 BMW of North America, Inc.]

