

REPAIR PROCEDURE:

1. Are the front seat belts already equipped with a comfort clips?
 - a. YES>>> This Bulletin does not apply. Normal diagnosis should be performed.
 - b. NO>>> Continue with the Repair Procedure [Step #2](#).

NOTE: Repeat comfort clip installation procedure for both front seat belts.

2. Obtain two comfort clip halves (1) as shown in ([Fig. 1](#)).

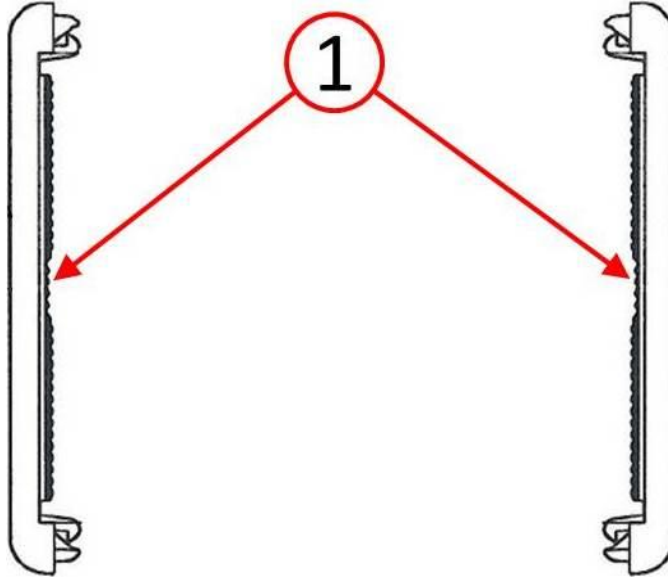


Fig. 1 Seat Belt Comfort Clip Two Halves

1 - Seat Belt Comfort Clip Kit

3. The comfort clip is to be installed in the area (3) between the stop button (1) and the latch plate (2) as shown in (Fig. 2).



Fig. 2 Seat Belt Comfort Clip Location

- 1 - Seat Belt Web Stop Button
 - 2 - Seat Belt Latch Plate
 - 3 - Comfort Clip Location
-

4. Position one clip half (1) with the teeth facing forward behind the seat belt webbing (2) as shown in (Fig. 3).



Fig. 3 Position Comfort Clip Behind Seat Belt

- 1 - Comfort Clip Half
 - 2 - Seat Belt Webbing
-

5. Position the second clip half with the teeth facing rearward to the first clip while aligning the snap features of both clips (1) as shown in (Fig. 4).
6. Fasten the clip halves together (2) by pressing until both sides “click” (Fig. 4).

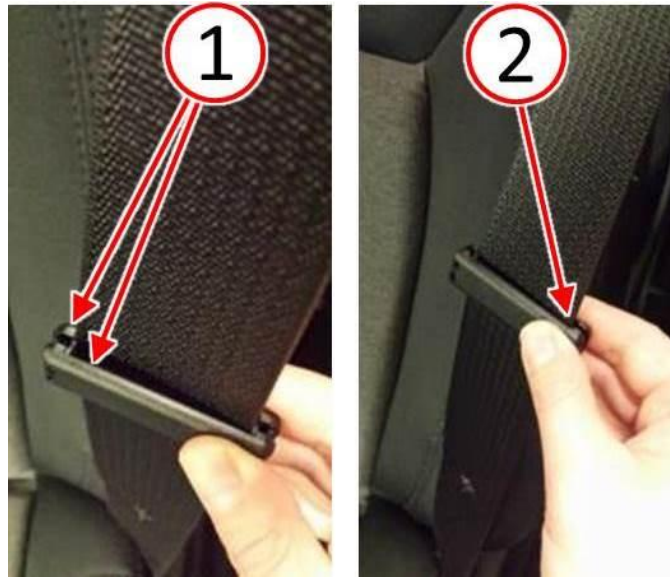


Fig. 4 Press Comfort Clip Halves Together To Fasten

- 1 - Align Comfort Clip Halves
 - 2 - Fasten Comfort Clip Halves
-

- 7. Place the comfort clip in the desired position on the seat belt and allow the latch plate to rest on top of the clip (Fig. 5).

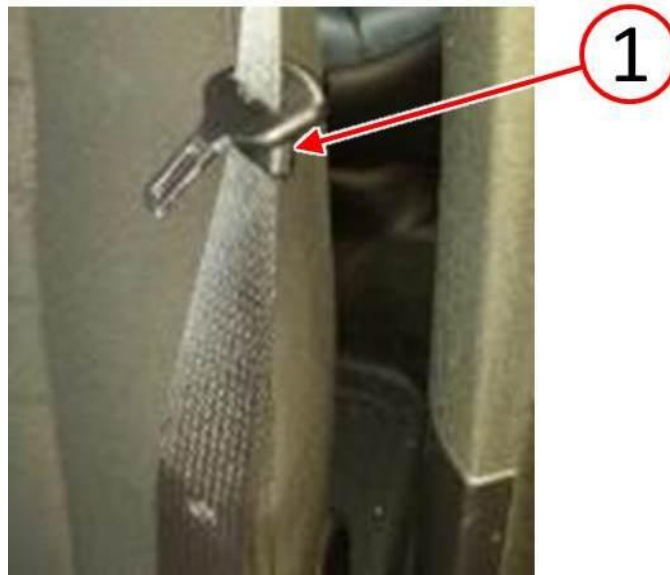


Fig. 5 Place Comfort Clip In Desired Position

1 - Position Comfort Clip

POLICY:

Reimbursable within the provisions of the warranty.

TIME ALLOWANCE:

Labor Operation No:	Description	Skill Category	Amount
23-13-05-90	Install Comfort Clips, Both Front Seat Belts (0 - Introduction)	6 - Electrical and Body Systems	0.2 Hrs.

FAILURE CODE:

ZZ	Service Action
----	----------------