



TT449: V-ROD REAR BRAKE LINE POSITION CHECK

December 2, 2015



APPLIES TO	SYMPTOMS
All V-Rod Models with Anti-lock Brake System (ABS)	• Part Availability, Installation or Fitment Updates

Issue

During a service event, if the rear brake line routing is disturbed from the original factory installed routing, it may come in contact with the exhaust.

Resolution

See Figure 1 and Figure 2. When a V-Rod with ABS is being serviced, check the rear brake line for correct routing. If the routing needs to be corrected, see the ABS BRAKE LINES section in a 2012 or later Service Manual.



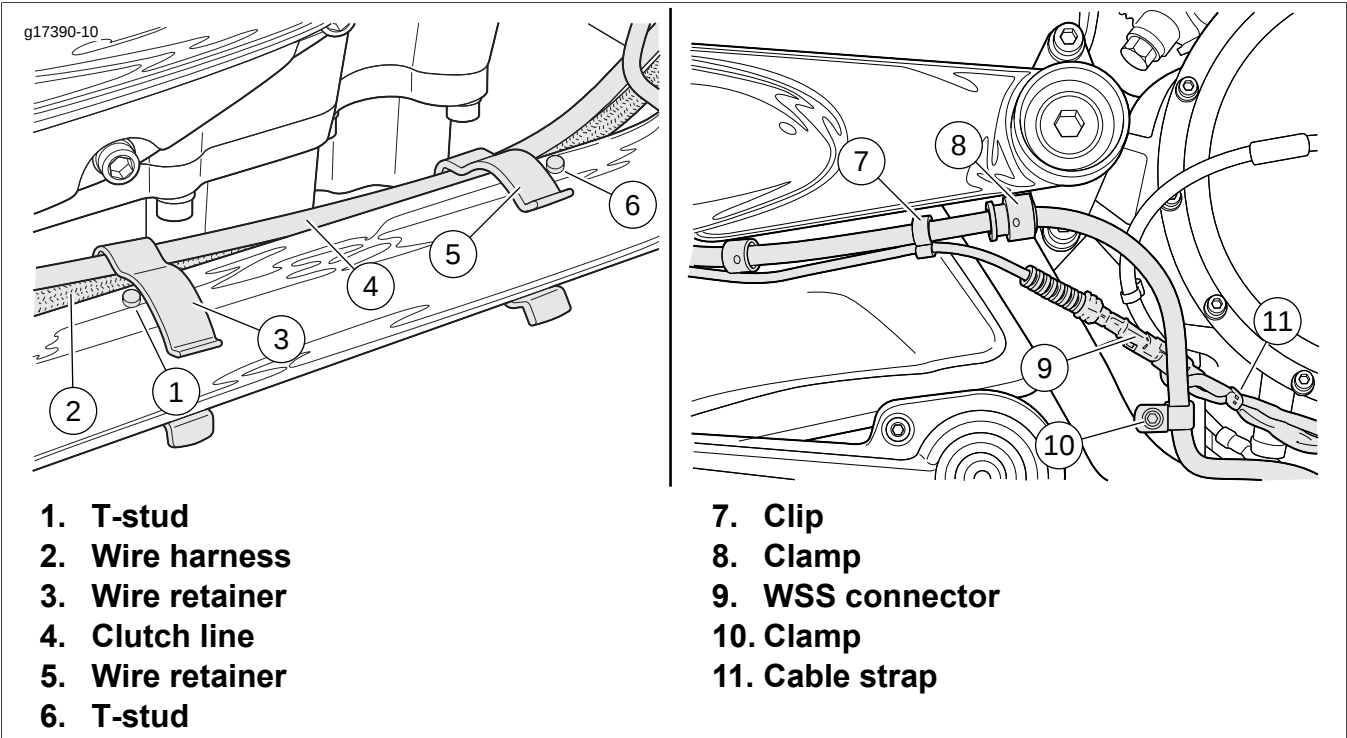


Figure 1. Brake Line Routing

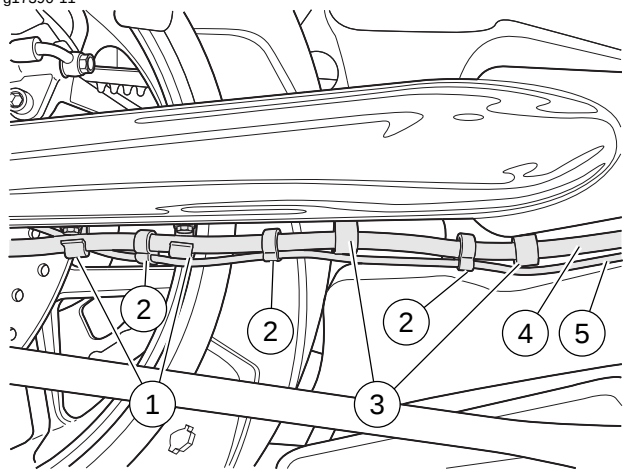

1. Clamp (outward facing)
2. Clip
3. Clamp (inward facing)
4. Brake line
5. Wiring

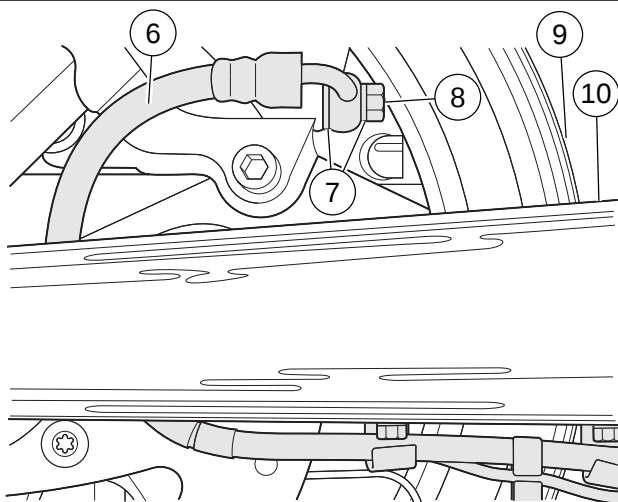

6. Rear brake caliper brake line
7. Sealing washer (2)
8. Banjo bolt
9. Rear tire
10. Rear fork

Figure 2. Brake Line Routing