
# TOYOTA RAV4/RAV4 HV

# 2016 PRE-DELIVERY SERVICE CHECK SHEET November 2015

	TO TIXE BEET			OTTEON	November 1	1 18
BEFORE INSPE	CTION	OK Adjust	UNDER VE	HICLE (ON F	HOIST)	OK Adjust
	e (vehicles with VIN beginning with	n "J"			covers/anti-corrosion	
					to customer delivery)	
	Assist Monitor System				e and adjust air pressure	
FUNCTIONAL (			3 Initialize Tire	Pressure Warning	System (TPWS) (see	
	cle ignition "IG-ON"; place gear selector. . Unlock all doors, release fuel door, relea		page 2)			
	esy, map, and sun visor lights				tire wheel covers*	
	cator lights, gauges, and horn				level*	
	ipers and washers				d other fluid leaks mage, rust, etc	
	nstrument lights, turn signals,				n chassis and powertrain for	
emergency flashers	s, and brake lights	00				
	le rear view mirror operation/		9 Install rubber	body plugs (store	d in glove box or center	
	nter* and power outlets					<u> </u>
	ation*/backup camera systems and	d set	ROAD TES	Т		
clock					mer satisfaction. Drive vehicle over	
			performance.	ices and driving cond	itions. Check for unusual noise ar	na arıvır
	ntertainment System operation*		Enter Odometer Re	eadings		
	erride button cover	🗆 🗖	Reading Before Tes	•	Reading After Test:	
WALKAROUNE						
	oor, check window and door lock oper interclockwise direction checking each do		2 Check engine	ngine operation	warm-up	
operation, child door locks	s, seat belts, interior condition, all lights	s, and luggage	· ·		ng temperature	
compartment contents. Fini HOOD checks.	sh by checking headlight aim and contin	ue into UNDER				
	Contour!				operation	
	System*or lock operation, including each				ff-center/vehicle pull/flutter	
	ntrol/theft deterrent system*				vibration	
	ration					
	nybrid system starts with all keys.				em*	
5 Check that child saf	fety door locks are in normal (unlo	cked)			d A/C operation	
•						
	eat belt operation				ion operation*	
	er/rear view mirror defogger*				D CLEANING	
	tail, backup, and license plate light partment light* and trim appearan				ers, unnecessary labels,	اے د
	l installation				delivery to customer)	
	n				for installation, damage, fit	'la c
UNDER HOOD					nd install using retaining	
	vel				protective bumper film*	
2 Check brake fluid level						
3 Check engine coolant level					s, chips, rust, dents,	ا ج
5 Check windshield washer fluid level					vener installation, domage	
	e-of-charge using Digital Batter				proper installation, damage,	
	SOC Reading:%) .				de of windshield, top left	
7 Inspect for fuel, oil, coolant, and other fluid leaks 🔲 🗆			corner			
BATTERY MAII	NTENANCE*				aid kit portfolio* in glove box	
1 Perform HV hatter	y check and maintenance				eck	
* Inspect or install when				ense plate and m	J	
Notes:	- 4 wildle dam oan		(see page 2)			<u></u> _
Completion and retention of	f this form is required to comply with Toyo	ota's Warranty Po	licy.			
		,	•		We hereby certify that all	items
TECHNICIAN'S SIGNATURE S		SERVICE MANA	ERVICE MANAGER'S SIGNATURE		on this form have be	
LOUINIONNO OIONATURE		SERVISE MANA	DENVICE IVIAIVAGEN O OIGINATURE		checked and corrected	
					proper operation as req	ıired.
NAME (PLEASE PRIN	IT)	NAME (PLEASE	PRINT)			
Date	Dealer Name		Dealer Code	Vehicle Identification	n Number (Sticker)	
	I					

### D/C CUT FUSE INSTALLATION

To minimize battery discharge the D/C Cut Fuse has been removed and is stored in the engine compartment Relay Block. Install the D/C Cut Fuse and confirm all related DTCs are cleared.

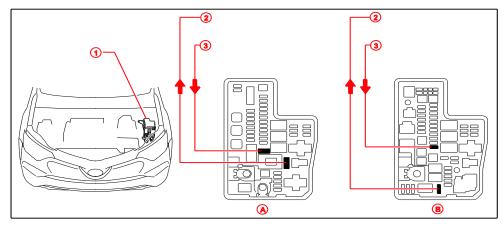

- A Hybrid Vehicles
- B Conventional Vehicles
- 1 Relay Block
- 2 Remove D/C Cut Fuse (30 A)
- 3 Install D/C Cut Fuse (30 A)

## TIRE PRESSURE WARNING SYSTEM (TPWS) INITIALIZATION

Refer to the Repair Manual for the Initialization Procedure RAV4 / RAV4 HV.

# **NOTE**

To adjust the tire pressure correctly when the outside temperature is significantly colder than shop temperature, perform a Health Check using Techstream and select the "Compensation Tire Pressure" checkbox. Compensation pressures will be displayed on the Health Check results screen. Adjust the tire pressure when the tires are cold.

# FRONT LICENSE PLATE & MOUNTING BRACKET INSTALLATION\*

1. Align holes "A" of the mounting bracket with the dimples on the front bumper cover. Mark the location of holes "B" on the front bumper cover.

#### NOTE

- Holes "A" are used for installation of the mounting bracket to the bumper cover.
- Holes "B" are used for the installation of the front license plate to the mounting bracket.
- 2. Drill 2 relief holes with a diameter of 11 mm (0.43 in.) at the hole "B" marks on the front bumper cover to prevent the license plate retaining bolt end from contacting cover.


#### **NOTE**

Do NOT pre-drill into the dimples on the front bumper cover.

- 3. Install the mounting bracket to the front bumper cover by attaching the 2 self-tapping screws into the dimples.
- 4. Install the front license plate to the mounting bracket using bolts with the following measurements:

Length: 15.0 - 23.0 mm (0.59 - 0.91 in.)

Diameter: 6.0 mm (0.24 in.) Pitch: 1.0 mm (0.04 in.)

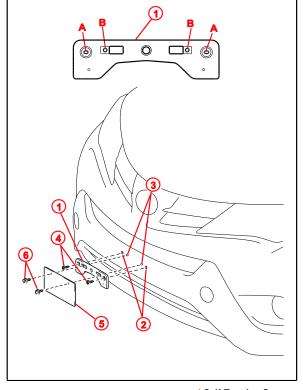

- 1 Mounting Bracket
- 2 Dimples
- 3 Mark and Drill Holes
- 4 Self-Tapping Screws
- 5 License Plate
- 6 Bolts