

Installation of Towing Wire Harness Connector During PDS

Service Category General

Section Pre-Delivery Service

Market USA

Lexus Supports ASE Certification 

Applicability


YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2016	LX570	

Introduction

The towing wire harness connector set (towing wire harness connector assembly and 2 bolts) is loaded in the vehicle at the assembly plant to avoid damage in transit.

Use the following procedure to install the towing wire harness connector to the vehicle during Pre-Delivery Service (PDS).

Figure 1.

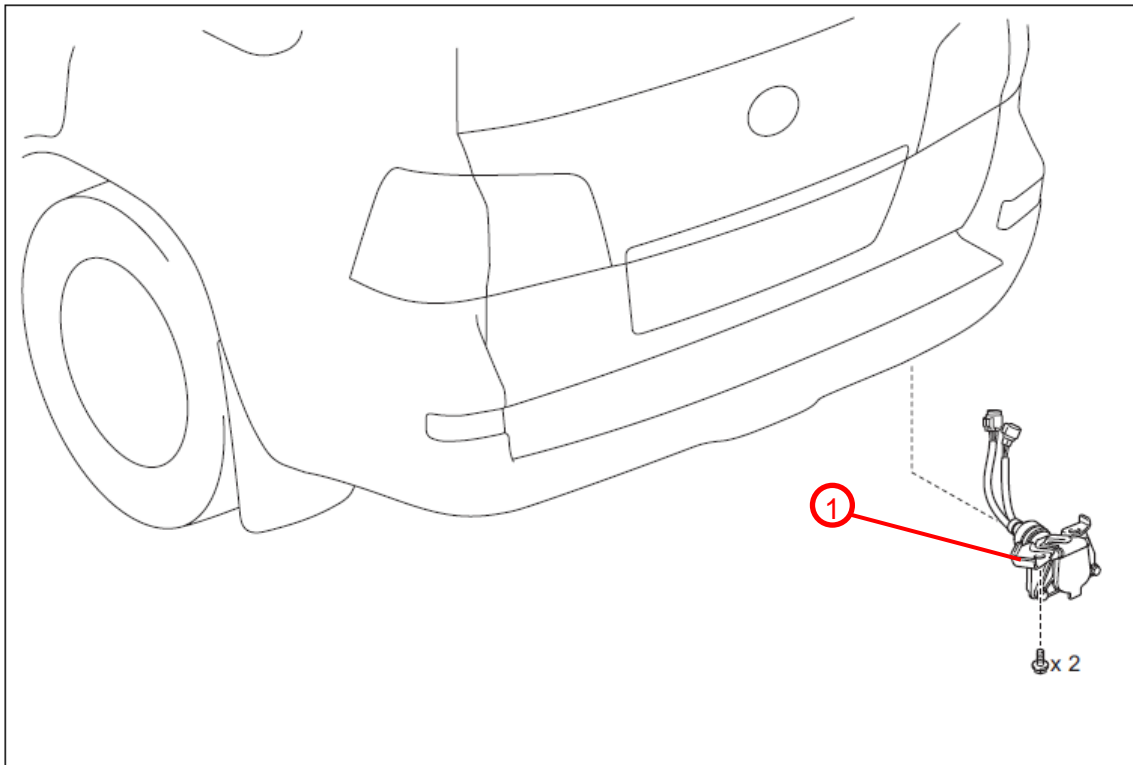

1	Towing Wire Harness
----------	----------------------------

Installation of Towing Wire Harness Connector During PDS


Warranty Information

OP CODE	DESCRIPTION	TIME	OFFP	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-

Installation Procedure

1. Connect the towing wire harness connectors.
 - A. Remove the water resistant caps from the 2 frame wire harness connectors.
 - B. Connect the 2 frame wire harness connectors and 2 towing wire harness connectors.

Figure 2.

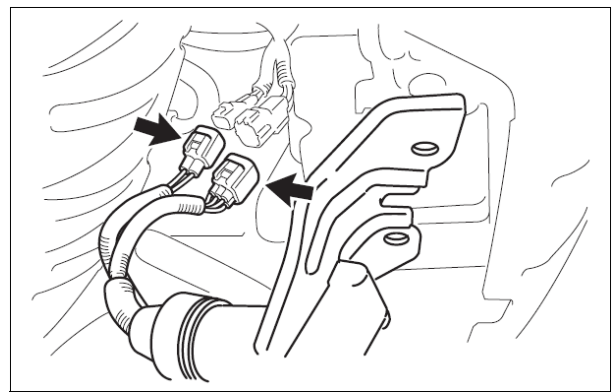

2. Install the towing wire harness assembly bracket to the frame bracket with the 2 bolts.

Torque: 19.5 N•m (199 kgf•cm, 14 ft•lbf)

Figure 3.

