

Front Floor Under Cover Installation during PDS

Service Category General

Section Pre-Delivery Service

Market USA

Lexus Supports
ASE Certification 

Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2016	LS460, LS600H	

Introduction

The front floor under cover set (right and left floor under covers and 8 clips) is loaded in the luggage compartment at the assembly plant to avoid damage during transit.

Install the front floor under covers during Pre-Delivery Service (PDS).

Warranty Information

OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-


Repair Procedure

1. Remove the 2 clips from the center floor under cover.

NOTE

Dispose of the original clips. They will NOT be reused.

Figure 1

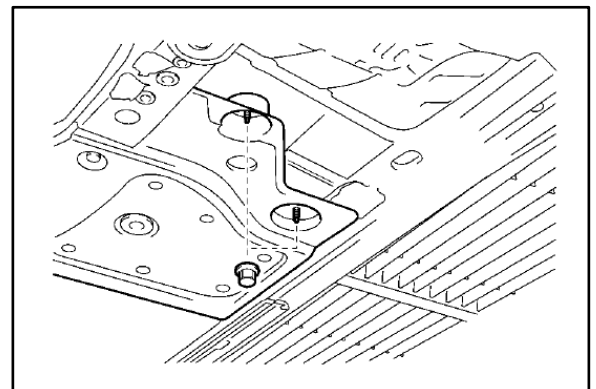

Front Floor Under Cover Installation during PDS

Repair Procedure (Continued)

2. Install the left side front floor under cover.
 - A. Install the under cover (for front side) and the fender apron with 2 clips.


NOTE

- Install the under cover clips in the holes on the left and right side of the fender apron screw.
- The letters "LH" are on the back of the left side front floor under cover.

- B. Install the under cover (for rear side) with 2 clips.

3. Repeat step 2 to install the right floor under cover.

Figure 2

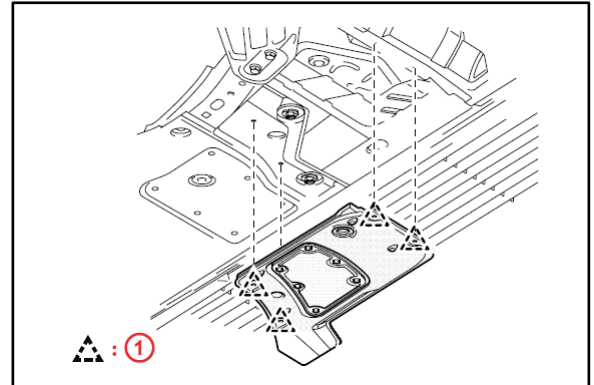

1	Clip
----------	-------------