

# Front License Plate & Mounting Bracket Installation

**Service Category** General

**Section** Pre-Delivery Service

**Market** USA

Lexus Supports  
ASE Certification 

## Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2016	LS460, LS600H	

## Introduction

The front license plate mounting bracket and 2 self-tapping screws for the 2016 model year LS 460 and LS 600h are placed in the luggage compartment of the vehicle at the assembly plant. For states that require a front license plate, install the bracket during Pre-Delivery Service (PDS) according to the following procedures.

## Warranty Information

OP CODE	DESCRIPTION	TIME	OFFP	T1	T2
N/A	Not Applicable to Warranty	–	–	–	–

## Front License Plate & Mounting Bracket Installation


### Installation Procedure

1. Align holes "A" of the mounting bracket with the LOWER set of dimples on the front bumper cover.

**NOTE**

- There are 2 sets of dimples on the front bumper cover. Use the LOWER set of dimples.
- Holes "A" are used to install the mounting bracket to the bumper cover.
- Holes "B" are used for installation of the front license plate to the mounting bracket.

Figure 1

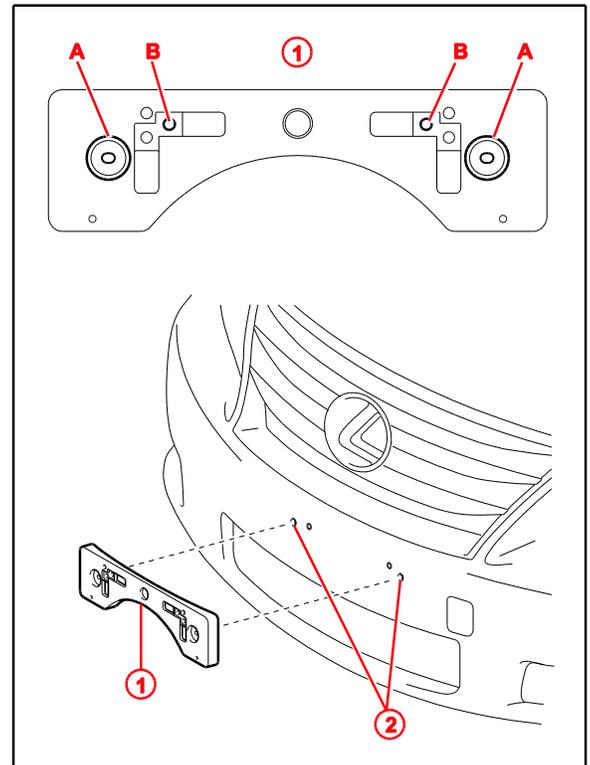

1	Mounting Bracket
2	Lower Dimples

2. Install the mounting bracket to the front bumper cover at holes "A" using the supplied self-tapping screws.

## Front License Plate & Mounting Bracket Installation


### Installation Procedure (Continued)

3. Install the front license plate to the mounting bracket at holes "B" using 2 non-corroding bolts with the following dimensions:

**Nominal Length: 10.0 mm (0.39 in.)**


**Diameter: 6.0 mm (0.24 in.)**

**Figure 2**

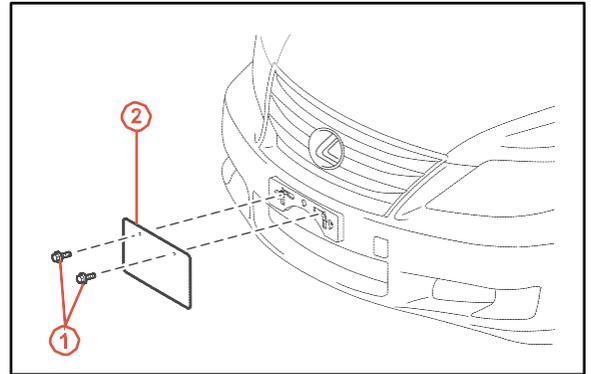

<b>1</b>	<b>Bolts</b>
<b>2</b>	<b>Front License Plate</b>

**Figure 3**

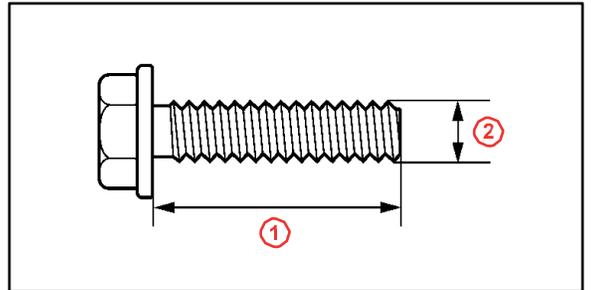

<b>1</b>	<b>Nominal Length</b>
<b>2</b>	<b>Diameter</b>