

Front Wheel Opening Extension Pad Installation During PDS

Service Category General

Section Pre-Delivery Service

Market USA



Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2017	ES300H, ES350	

Introduction

The front wheel opening extension pad set (right and left front wheel opening extension pads, 2 self-tapping screws) is loaded in the luggage compartment at the assembly plant to avoid damage in transit. Install the front wheel opening extension pads to the vehicle during Pre-Delivery Service (PDS).

Warranty Information

OP CODE	DESCRIPTION	TIME	OFF	T1	T2
N/A	Not Applicable to Warranty	-	-	-	-


Installation Procedure

1. Remove the 2 self-tapping screws from the left front engine under cover.

NOTE

The removed self-tapping screws will be reused.

Figure 1.

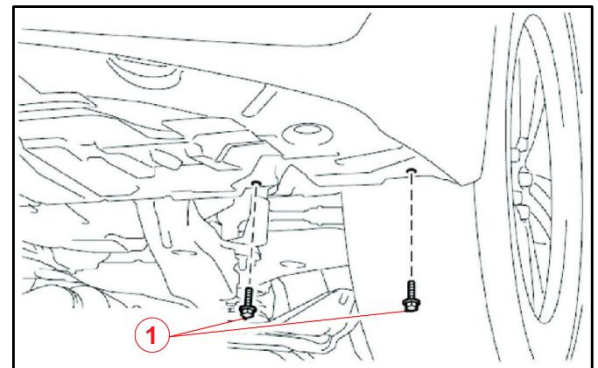

1	Self-tapping Screw
----------	---------------------------

Front Wheel Opening Extension Pad Installation During PDS


Installation Procedure (Continued)

2. Place the left front wheel opening extension pad in position. Using the 2 original self-tapping screws and 1 of the provided self-tapping screws, install the extension pad by tightening the 3 self-tapping screws as shown.

NOTE

There is a distinguishable mark on each pad that identifies the right and left side.

Figure 2.

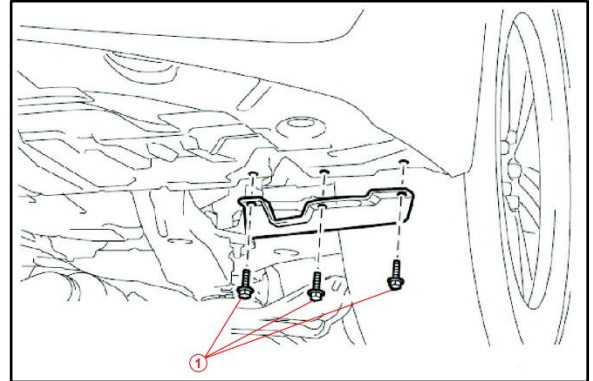

1	Self-tapping Screw
----------	---------------------------

3. Repeat steps 1 and 2 to install the right front wheel opening extension pad.