



Countries:
Availability:
Major System: ELECTRICAL SYSTEM
Current Language: English
Other Languages: NONE
Viewed: 115

Document ID: IK0800530
Revision: 0
Created: 11/7/2016
Last Modified: 11/7/2016
Author: Andrew Boyd

[Less Info](#)

Hide Details

Coding Information

Copy Link	Copy Relative Link	Bookmark	Add to Favorites	Print	Edit Document	Provide Feedback	Helpful	Not Helpful
		 View My Bookmarks					 1	 0

Title: Dome light replacement

Applies To: Prostar

CHANGE LOG

Please refer to the change log text box below for recent changes to this article:

09/23/2015 - Initial Article Release

DESCRIPTION

This document will guide the user through the correct process to repairing a damaged dome light so the issue does not return.

SYMPTOM(s)


Dealers or customer may find a broken Dome Light on Prostars upon delivery.

Customer Observations or Concerns:

Dome light assembly falling out of mounting area.

REPAIR STEP(s)

Remove both installation bolts and discard the damaged dome light. A 12.5mm OD washer is needed to aid in spreading the clamping force of the installation bolt when replacing the dome light, this can be sourced locally or use part number 30325R1. A longer installation bolt is not needed when adding the washer. The correct bolt torque is 1.5NM=1.11 FT LB

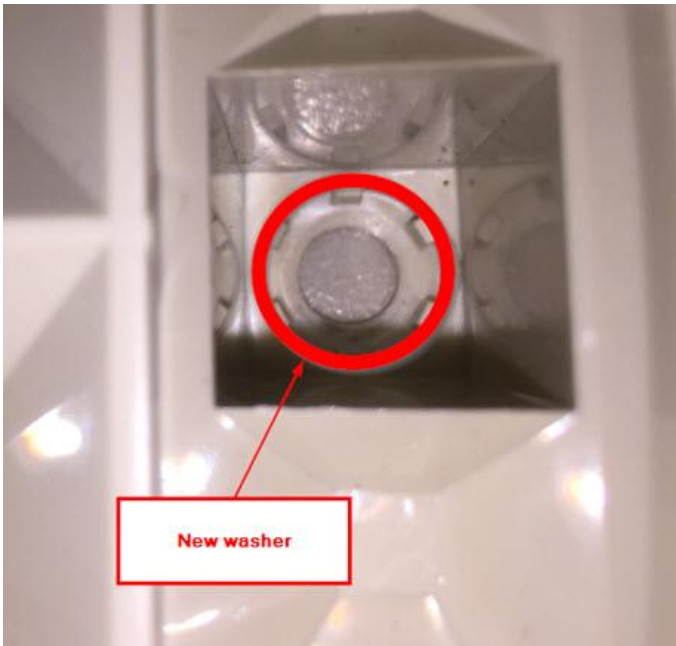

WARRANTY INFORMATION

Warranty Claim Coding:

Refer to the [Warranty Coding Manual](#) for Group and Noun Codes.

OTHER RESOURCES

[Master Service Information Site](#)

 Hide Details

Feedback Information

Viewed: 114

Helpful: 1

Not Helpful: 0

No Feedback Found