

SERVICE BULLETIN

Reference number:	SB-01-0426	Issued: 11 February 2016
Subject:	Using the New Special Tool to Remove the Bezel for the Docking Station	
Model(s):	All vehicles with docking station	
VIN Range:	All	
Applicable to:	All Dealers	
Distribute to:	After Sales Manager Executive Manager Service Manager Sales Manager	Warranty Technician(s) Parts

Reason for this Service Bulletin

We have introduced a new special tool - 43-28335 Docking Station Bezel Release Tool. The function of this special tool is to remove the bezel for the docking station without damage.

This Service Bulletin gives the instructions to tell you how to use the special tool.

Workshop Procedure

1. The special tool has a tang projecting from the tip of each arm (refer to Figure 1).



Figure 1

2. Put the special tool into the docking station. Engage the tangs of the special tool with the slots in the bezel (refer to Figure 2). The tangs will release the clips that keep the bezel.



Figure 2

3. Use the special tool to pull the bezel out of the docking station (refer to Figure 3).

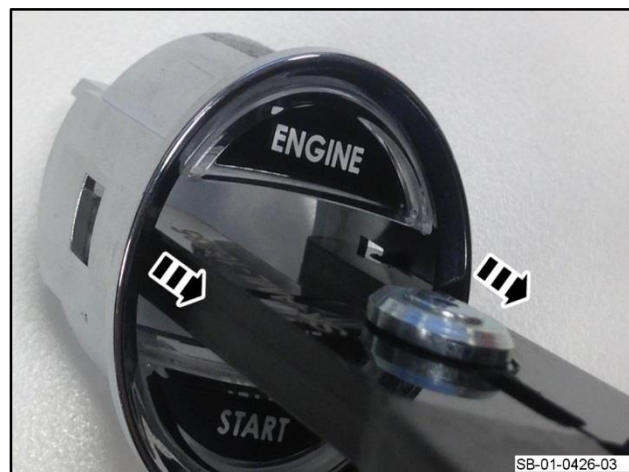


Figure 3

4. As you pull the bezel out, make sure you do not remove the shutter of the docking station (refer to Figure 4).



Figure 4

Note: *Make sure that the shutter of the docking station is in the centre of the docking station when you install the bezel. To install the bezel, you must push it in until the two clips engage - you will hear a click.*

If you have any questions related to this Service Bulletin, please contact: Aston Martin Technical Services
on: +44 (0) 1926 644720, email: askamtech@astonmartin.com,
Or contact your After Sales Manager.

The English version of this Service Bulletin is written in
Simplified Technical English to ASD-STE100™.