


	SERVICE BULLETIN	Issue no.	SB-001
		Issue date	1, April 2016
		Page No	1 of 1
SUBJECT	SERVICE PROCEDURE FOR ENGINE OIL LEVEL CHECK		
APPLICABLE MODELS	ALL		
APPLICABLE COUNTRIES	ALL		

This Service Bulletin is to inform you about the procedure for checking oil level.

1. Place vehicle on center stand before checking oil.
2. Start and run motorcycle for three minutes.
3. Turn off motorcycle and wait two minutes
4. Check oil level in sight glass on right hand side cover.
5. Oil should be between minimum and maximum mark.
6. If oil is below minimum mark, add *15w-50 weight oil to bring level between minimum and maximum mark. (**Do not over-fill**)
7. Repeat steps 2-5
8. Oil capacity between minimum and maximum marks is approximately 350ml

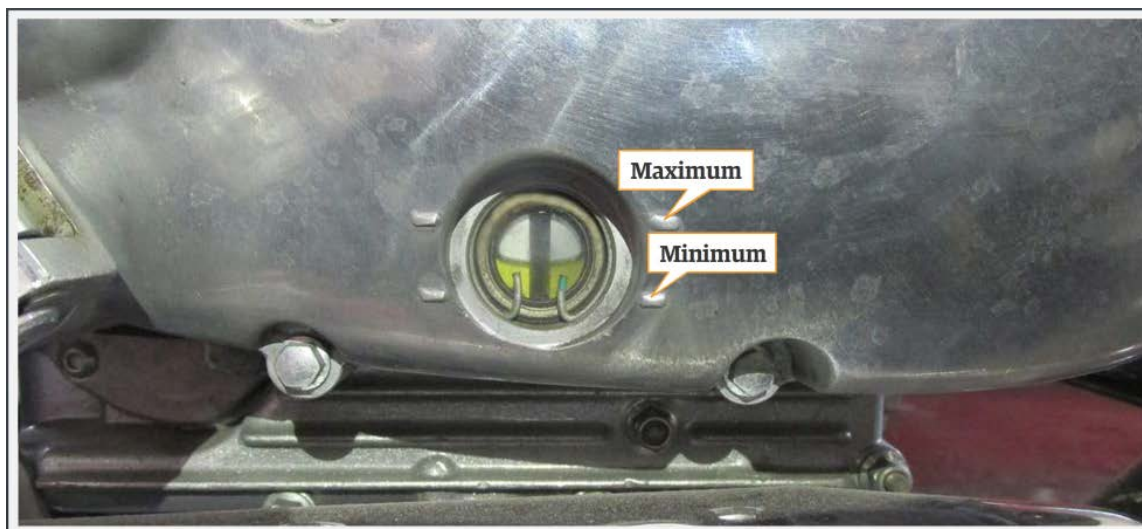

*20w-50 may be used if 15w-50 is not available

Request you to communicate this information to all the concerned persons.

RENA Service Team

Royal Enfield North America (A Unit of Eicher Motors Ltd.)

Royal Enfield North America, Milwaukee WI

Renaservice@royalenfield.com