

Fuel Tank Cap in Aluminum Look

Concern: **Retrofitting**

Model Year: **As of 2017**

Note: A fuel tank cap ("Fuel tank cap in Aluminum Look" in the Tequipment Catalog) is available for the 718 Boxster (982).



Parts Info: **000.044.001.91**

⇒ Fuel tank cap in Aluminum Look, set

Parts List:

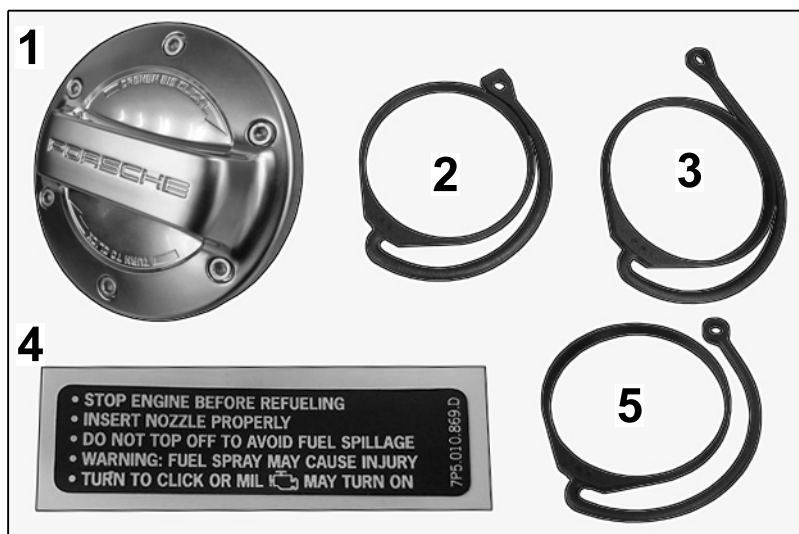


Figure 2

— — — —	1 x	Fuel tank cap ⇒ Figure 2 -1-
— — — —	1 x	Retaining strap for Panamera ⇒ Figure 2 -2-
— — — —	1 x	Retaining strap for Cayenne ⇒ Figure 2 -3-
7P5.010.869.D	1 x	Sticker (warning note) ⇒ Figure 2 -4-
— — — —	1 x	Retaining strap for Sports Car ⇒ Figure 2 -5-

Materials:	— — — —	— — — —	Isopropanol (commercially available)
	— — — —	— — — —	Cleaning cloth (commercially available)

Work Procedure: 1 The retaining straps are differentiated based on their geometric shape and the part number on the retaining strap.

- A** – 911, Boxster (circular)
- B** – Panamera (square)
- C** – Cayenne (teardrop shape)
- arrow** – Sports Cars: 991..., Cayenne: 7L5..., Panamera: none

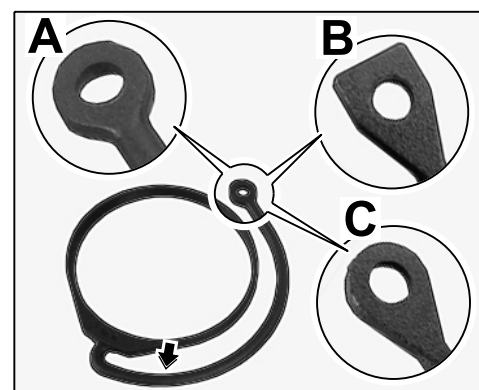


Figure 3

- 2 Fit retaining strap on new fuel tank cap.
 - 2.1 Fit retaining strap $\Rightarrow$ Figure 4 -1- into the groove as shown $\Rightarrow$ Figure 4 -arrow a-.
 - 2.2 Press retaining strap into the groove with your thumb $\Rightarrow$ Figure 4 -arrows-.

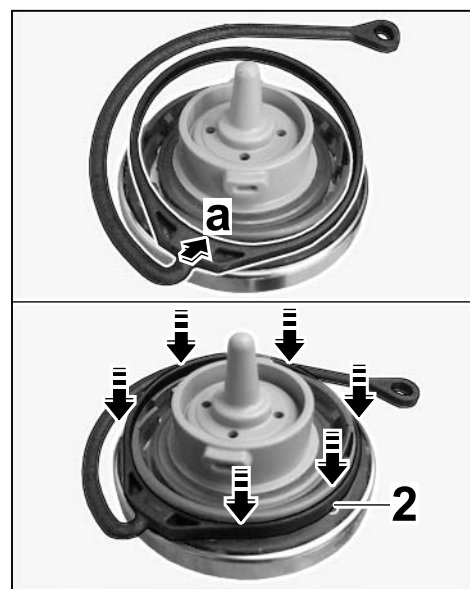


Figure 4

WARNING

Highly flammable or explosive materials

- **Danger of fire or explosion**
- $\Rightarrow$ **Avoid contact with hot parts or sources of ignition.**
- $\Rightarrow$ **Use suction to remove ignitable vapors.**
- $\Rightarrow$ **Attach warning sign in a clearly visible position.**

- 3 Remove old fuel tank cap (shown with retaining strap for Cayenne).
 - 3.1 Open the filler flap on the vehicle.
 - 3.2 Carefully pull the retaining strap $\Rightarrow$ Figure 5 -1- down $\Rightarrow$ Figure 5 -arrow a- and then swivel the ring up over the retaining pivot $\Rightarrow$ Figure 5 -arrow b-.
 - 3.3 Unscrew old fuel tank cap from the filler neck.

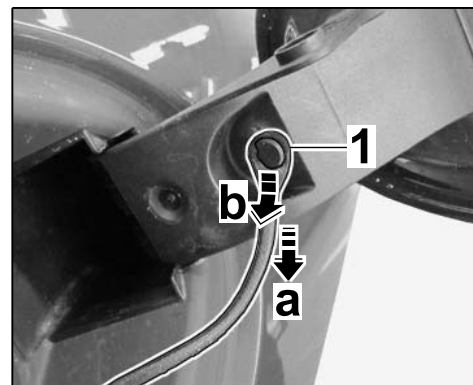


Figure 5

- 4 Fit new fuel tank cap on the vehicle (shown with retaining strap for Cayenne).
 - 4.1 Position small ring ⇒ *Figure 6 -1-* on the retaining pivot ⇒ *Figure 6 -2-*, pull it down carefully and guide it over the retaining pivot.
 - 4.2 Fit new fuel tank cap on the filler neck and screw it on.

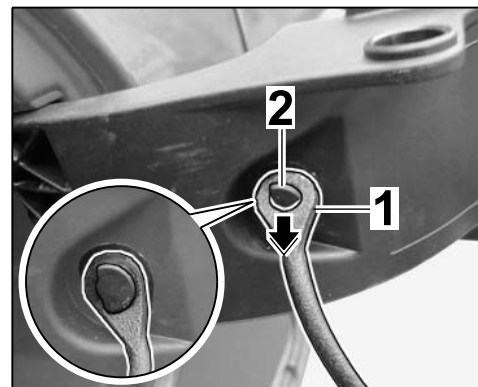


Figure 6

- 5 Affix sticker (warning note) ⇒ *Figure 7 -arrow-* to the filler flap.
 - 5.1 Clean bonding position with a cleaning cloth and isopropanol to remove any dust and grease.
 - 5.2 Affix sticker.



Figure 7

Working Time: 20055500 Replacing fuel tank cap

Labor time: **20 TU**

Includes: Fitting retaining strap on new fuel tank cap, applying sticker.

Important Notice: Technical Bulletins issued by Porsche Cars North America, Inc. are intended only for use by professional automotive technicians who have attended Porsche service training courses. They are written to inform those technicians of conditions that may occur on some Porsche vehicles, or to provide information that could assist in the proper servicing of a vehicle. Porsche special tools may be necessary in order to perform certain operations identified in these bulletins. Use of tools and procedures other than those Porsche recommends in these bulletins may be detrimental to the safe operation of your vehicle, and may endanger the people working on it. Properly trained Porsche technicians have the equipment, tools, safety instructions, and know-how to do the job properly and safely. If a particular condition is described, do not assume that the bulletin applies to your vehicle, or that your vehicle will have that condition. See your authorized Porsche Dealer for the latest information about whether a particular technical bulletin applies to your vehicle. Part numbers listed in these bulletins are for reference only. Always check with your authorized Porsche dealer to verify the current and correct part numbers. The work procedures updated electronically in the Porsche PIWIS diagnostic and testing device take precedence and, in the event of a discrepancy, the work procedures in the PIWIS Tester are the ones that must be followed.

© Porsche Cars North America, Inc.

Dealership	Service Manager	Shop Foreman	Service Technician				
Distribution							
Routing	Asst. Manager	Warranty Admin.	Service Technician				

Dr. Ing. h.c. F. Porsche AG is the owner of numerous trademarks, both registered and unregistered, including without limitation the Porsche Crest®, Porsche®, Boxster®, Carrera®, Cayenne®, Cayman®, Macan®, Panamera®, Speedster®, Spyder®, 918 Spyder®, Tiptronic®, VarioCam®, PCM®, PDK®, 911®, RS®, 4S®, FOUR, UNCOMPROMISED®, and the model numbers and the distinctive shapes of the Porsche automobiles such as, the federally registered 911 and Boxster automobiles. The third party trademarks contained herein are the properties of their respective owners. Porsche Cars North America, Inc. believes the specifications to be correct at the time of printing. Specifications, performance standards, standard equipment, options, and other elements shown are subject to change without notice. Some options may be unavailable when a car is built. Some vehicles may be shown with non-U.S. equipment. The information contained herein is for internal authorized Porsche dealer use only and cannot be copied or distributed. Porsche recommends seat belt usage and observance of traffic laws at all times.

Printed in the USA