



2016 PRE-DELIVERY SERVICE CHECK SHEET

BEFORE INSPECTION		OK	Adjust/Repair
01 Install DCC Fuse (see page 2)	☐		
02 Connect Delivery Mode Wire Harness Connectors (automatic transmission only) (see page 2)	☐		
FUNCTIONAL OPERATION			
Apply parking brake and cycle ignition "IG-ON," place gear selector in reverse; turn on lights and rear defogger. Unlock all doors, release fuel door, release trunk hatch.			
01 Check dome, courtesy, map, and sun visor lights*	☐	☐	
02 Check warning/indicator lights, gauges, and horn	☐	☐	
03 Check windshield wipers and washers	☐	☐	
04 Check headlights, instrument lights, turn signals, dimmer switch, emergency flashers, and brake lights	☐	☐	
05 Check inside/outside rear view mirror operation/adjustment	☐	☐	
06 Check power outlet* and cigarette lighter	☐	☐	
07 Check audio/navigation* systems, set SSP* to FR-S, and set clock	☐	☐	
08 Install shift-lock override button cover	☐		
WALKAROUND INSPECTION			
Start at driver's front door, check window and door lock operation (from master power switch, if equipped). Continue around vehicle in a counterclockwise direction checking each door and window operation, child door locks, seat belts, interior condition, all lights, luggage compartment contents. Finish by checking headlight aim and continue into UNDER HOOD checks.			
01 Check Smart Key System*	☐	☐	
02 Check door and door lock operation, including each wireless remote control/theft deterrent system*	☐	☐	
03 Check power window operation	☐	☐	
04 Check that engine starts with all keys	☐	☐	
05 Check seats and seat belt operation	☐	☐	
06 Check rear defogger	☐	☐	
07 Check side marker, tail, backup, and license plate lights	☐	☐	
08 Check rear cargo area trim appearance	☐	☐	
09 Adjust compact spare tire pressure and check jack and tool installation	☐	☐	
10 Check headlight aim	☐	☐	
UNDER HOOD			
01 Check engine oil level	☐	☐	
02 Check brake and clutch* fluid levels	☐	☐	
03 Check engine coolant level	☐	☐	
04 Check windshield washer fluid level	☐	☐	
05 Check battery state-of-charge using Digital Battery System Analyzer (SOC Reading: _____%)	☐	☐	
06 Inspect for fuel, oil, coolant, and other fluid leaks	☐	☐	
UNDER VEHICLE (ON HOIST)			
01 Remove disc brake anti-rust covers/anti-corrosion wheel film*	☐		
02 Activate the Tire Pressure Warning System (TPWS) sensors (see page 2)	☐	☐	
03 Inspect tires for defects/damage	☐	☐	
04 Install rubber body plugs	☐	☐	
05 Remove spring spacers (Release Series 2.0 only)	☐	☐	
06 Inspect for fuel, oil, coolant, and other fluid leaks	☐	☐	
07 Visually check bolts and nuts on chassis and powertrain for looseness	☐	☐	
08 Inspect under the vehicle for damage, rust, etc.	☐	☐	
ROAD TEST			
A complete road test helps assure customer satisfaction. Drive vehicle over a variety of road surfaces and driving conditions. Check for unusual noise and driving performance.			
Enter Odometer Reading			
Reading Before Test: _____ Reading After Test: _____			
01 Check cold engine operation	☐	☐	
02 Check engine operation during warm-up	☐	☐	
03 Check engine at normal operating temperature	☐	☐	
04 Check clutch or automatic transmission operation	☐	☐	
05 Check brake and parking brake operation	☐	☐	
06 Check steering operation and off-center/vehicle pull/flutter	☐	☐	
07 Inspect for abnormal noise and vibration	☐	☐	
08 Inspect for squeaks and rattles	☐	☐	
09 Check heater and A/C operation	☐	☐	
10 Check speedometer operation	☐	☐	
11 Check cruise control operation	☐	☐	
FINAL INSPECTION AND CLEANING			
01 Remove interior protective covers, unnecessary labels, tags, etc. (Remove protective covers just before delivery to customer)	☐		
02 Verify floor mat application and install using retaining clips*	☐	☐	
03 Visually inspect all interior parts for installation, damage, fit, dirt, etc.	☐	☐	
04 Remove Rapgard™ and clear protective bumper film*	☐	☐	
05 Wash and clean vehicle	☐		
06 Inspect paint finish for scratches, chips, rust, dents, damage, etc.	☐	☐	
07 Inspect exterior body parts for proper installation, damage, rust, etc.	☐	☐	
08 Place Owner's Guide and first aid kit portfolio* in glove box	☐		
09 Place oil change sticker on inside of windshield, top left corner	☐		
10 Perform Techstream Health Check	☐	☐	
11 Install front license plate and mounting bracket* (see page 2)	☐		
* Inspect or install when equipped/required.			
Completion and retention of this form is required to comply with Toyota's Warranty Policy.			
TECHNICIAN'S SIGNATURE _____		SERVICE MANAGER'S SIGNATURE _____	
NAME (PLEASE PRINT) _____		NAME (PLEASE PRINT) _____	
Date _____	Dealer Name _____	Dealer Code _____	Vehicle Identification Number (Sticker) _____


We hereby certify that all items on this form have been checked and corrected for proper operation as required.

DCC FUSE INSTALLATION

To minimize battery discharge the DCC fuse has been removed and is stored in the engine compartment Relay Block. Install the DCC fuse during PDS.

NOTE

Failure to install the DCC fuse may cause the Check Engine Light (MIL) to flash with no engine misfires or DTCs stored and may cause the radiator fans to cycle on and off rapidly.




- 1 Remove This DCC Fuse
- 2 Install DCC Fuse Here

DELIVERY MODE WIRE HARNESS CONNECTORS

(Automatic Transmission ONLY)

The delivery mode connectors for key interlock have been disconnected at the assembly plant to prevent damage to automatic transmission during rail transport. The disconnected delivery mode connectors must be connected during PDS.

1. From the driver side cowl trim, remove the 2 disconnected connectors.
2. Connect the 2 connector ends.
3. Place connector inside cowl trim area.
4. Confirm transmission will not shift from P with ignition OFF.
5. Confirm the ignition switch cannot be turned from ACC to LOCK or that the key cannot be removed from the key cylinder when the shift lever is NOT in P.

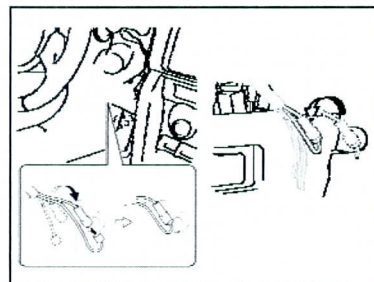

TPWS ACTIVATION

Activation Procedure

1. Connect Techstream.
2. Cycle the IG switch to the "IG-ON" position and check that the Low Tire Pressure Warning Light blinks for 1 minute and then remains illuminated.
3. Press or remove the valve core to reduce the tire inflation pressure rapidly by 6 psi (0.4 kgf/cm², 40 kPa), or more, within 30 seconds.
4. Check that the Low Tire Pressure Warning Light goes OFF after all the TPWS sensors are activated.

NOTE

To adjust the tire pressure correctly when the outside temperature is significantly colder than shop temperature, perform a Health Check using Techstream and select the "Compensation Tire Pressure" checkbox. Compensation pressures will be displayed on the Health Check results screen. Adjust the tire pressure when the tires are cold.

5. Using Techstream, check for DTCs (C2111-C2114). If DTCs C2111-C2114 are stored, repeat step 3.
6. System initialization is NOT available or required.

FRONT LICENSE PLATE AND MOUNTING BRACKET INSTALLATION*

For states that require a front license plate, please install per this procedure. The mounting bracket, self-tapping screws, flange bolts, J-nuts, and non-corroding bolts are stored in the luggage compartment.

Installation Procedure

1. Align holes "A" of the mounting bracket and the dimples on the front intake cover. Temporarily install the 2 self-tapping screws.
2. Mark the location of holes "B" on the front bumper cover.

NOTE


Holes "A" and "B" are used for the installation of the mounting bracket to the bumper cover.

3. Remove the license plate mounting bracket.
4. Mark the Mark "C" locations on the front bumper cover as shown in the illustration.
5. Drill 2 relief holes with a diameter of 10 mm (0.39 in.) at Mark "B" on the front bumper cover.
6. Drill 6 relief holes with a diameter of 22 mm (0.87 in.) at Mark "C" on the front bumper cover as shown in the illustration.


NOTE

Holes "C" are used to install J-nuts to the front bumper cover.


7. Install the 2 J-nuts to the front bumper cover through holes "C".
8. Align holes "B" of the mounting bracket and the J-nuts on the front bumper cover. Temporarily install the 2 flange bolts.
9. Align holes "A" of the mounting bracket and the dimples on the front intake cover. Temporarily install the 2 self-tapping screws.
10. Tighten the 2 flange bolts and tapping screws equally so that there is no clearance between the license plate mounting bracket and the front bumper cover.
11. Install the front license plate to the mounting bracket using the 2 non-corroding bolts.

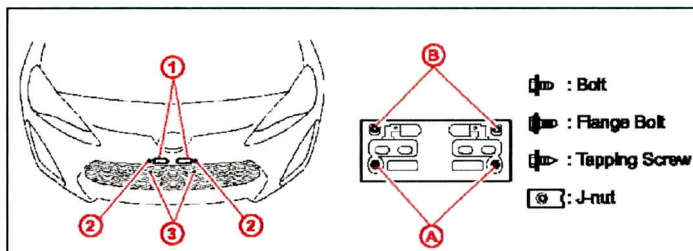


- 1 Mark "C" 2 Mark "B" 3 Dimples A Holes "A" B Holes "B"



- 1 Mark "B" 2 Dimples 3 License Plate Mounting Bracket 4 Tapping Screw



- 1 Mark "C" 2 Mark "B"



- 1 J-nut 2 License Plate Mounting Bracket 3 Tapping Screw 4 Flange Bolt