Perform this procedure on both the Driver and Passenger Front Doors.



Step 1: Remove Screw Covers on inner handle and liner pocket





Step 2: Remove screws







Step 3: Unset Lower Inner Corner First by pulling with your hand





Step 4: From corner, unset all clips and unset all clips on the liner (Pull in B-Direction)





Step 5: Unset inner handle clip and slide handle out from liner.





<u>Step 6</u>: While holding the front door panel (A) away from the door, disconnect the connectors.





Step 7: Verify no damage on visible cables.







<u>Step 8</u>: Remove Top Corner of outboard most Inner Hole Seal.





Step 9: Inspect the cables between the cable clip and cable grommet to confirm the cables are not twisted.

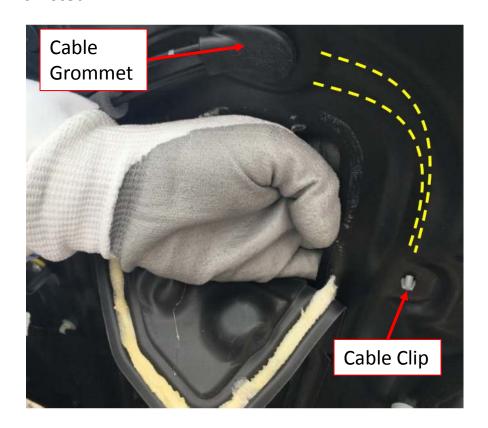

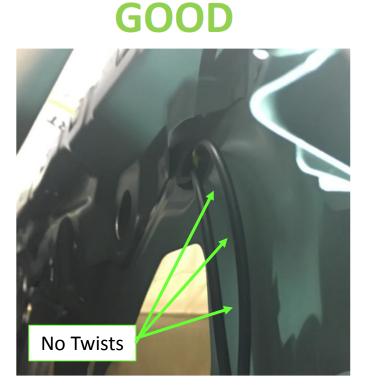

See next page for No Good conditions




Step 9: Inspect the cables between the cable clip and cable grommet to confirm the cables are not twisted.

# NO GOOD NO GOOD Twist Twist Twist Twist

If cable condition is Good, go to step 15 (Door panel installation.) If cable condition is No Good, go to step 10



Step 10: Unset the cable grommet.

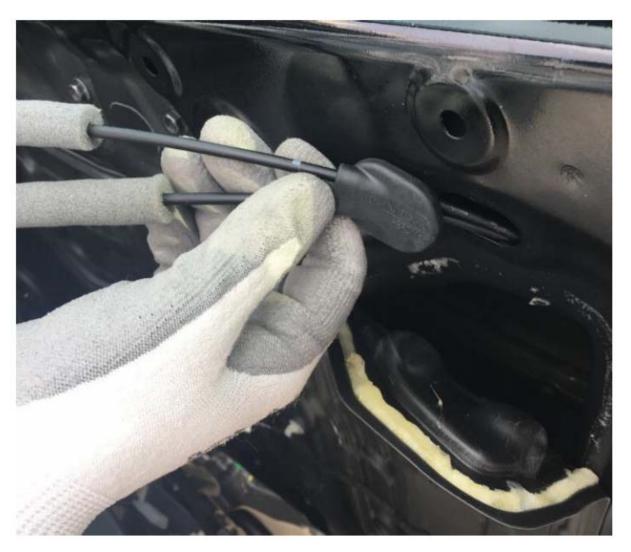



Step 11: Untwist cables to good condition, verify cables are good by running fingers on the back side of the panel to feel if the cable is twisted. \*Cables should be parallel.





Step 12: Reset the grommet to the door.






Step 13: : Reset door hole seal barrier \* Failure to ensure the entire perimeter is sealed will result in audio bass rattle.






Step 14: Push the cables into the grommet to the paint marks on the cables.

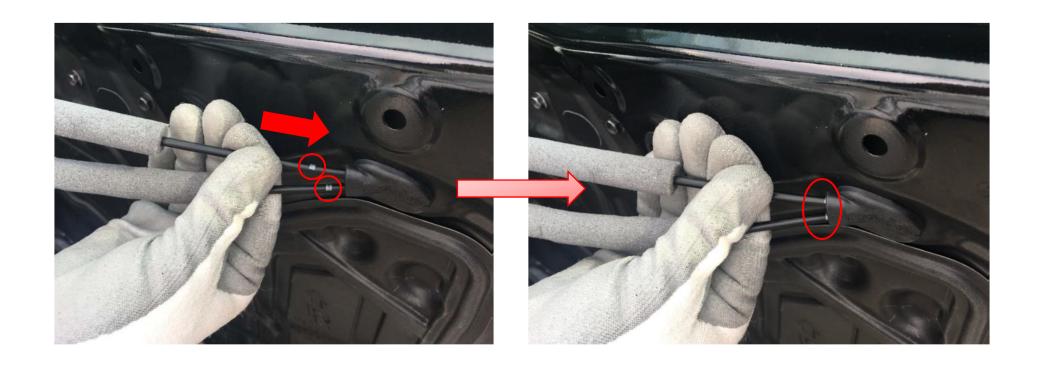



Step 15: Door Panel Installation- The cables must be routed under the 3 green clips/doghouses identified below. (Driver's door panel shown.)

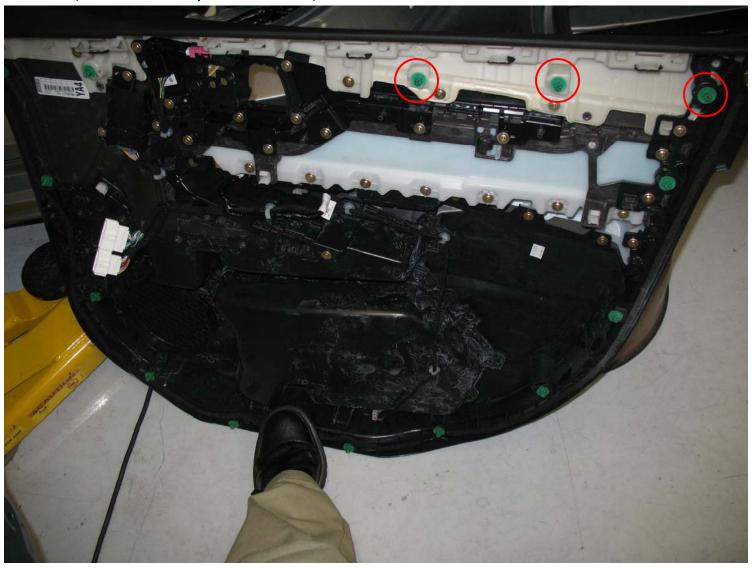




Step 15: Door Panel Installation- The cables must be routed under the 3 clip locations identified below. (Driver's door panel shown.)






Step 16: After reconnecting all wire harness electrical connectors, use your hand to cover clip and doghouse while reinstalling door liner.

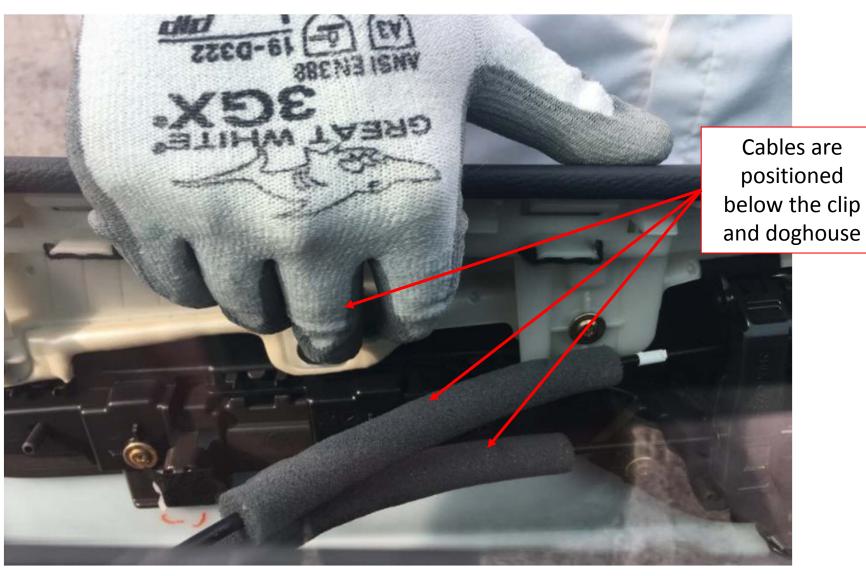



Step 16: Use your hand to cover clip and doghouse while reinstalling door liner.

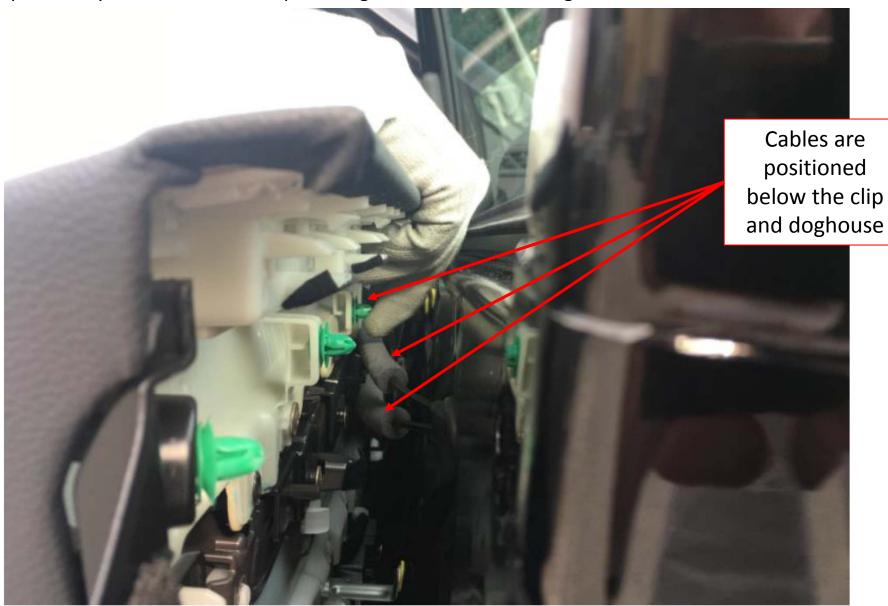



Step 17: Reset all liner clips and reinstall bolts and bolt covers.

