	GROUP BOD	MODEL 2018MY~ Rio (SC)
	NUMBER 175	DATE September 2017
TECHNICAL SERVICE BULLETIN		
SUBJECT: RIO (SC) FRONT LICENSE PLATE BRACKET INSTALLATION		


This bulletin provides information regarding the installation of the front license plate bracket on 2018MY~ Rio (SC) vehicles. The front license plate bracket must be installed in the orientation and location specified on page 2 of this bulletin.



File Under: <Body>


-
- Circulate To:**
 General Manager
 Service Manager
 Parts Manager
 Service Advisors
 Technicians
 Body Shop Manager
 Fleet Repair

When installing the front license plate bracket, ensure the two (2) bottom bracket holes (A) are aligned with the two (2) outer dimples (B) on the front bumper garnish.

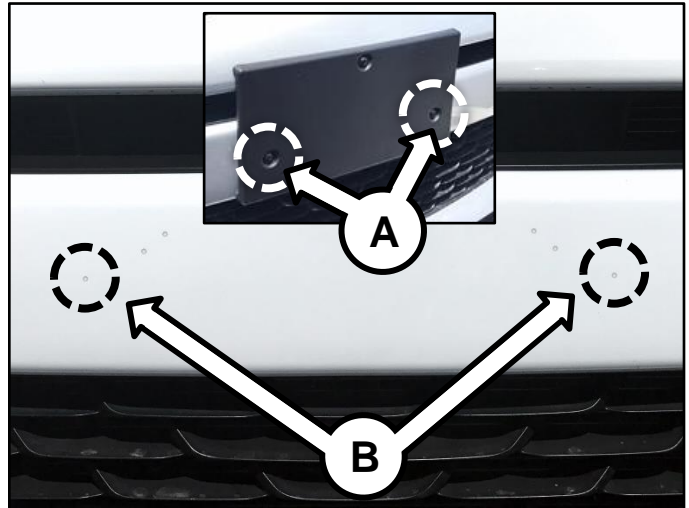

The bottom of the front license plate bracket (C) should be flush with the bottom of the front bumper garnish (D).

Carefully install the three (3) provided screws through dimples (B) to secure the bracket.

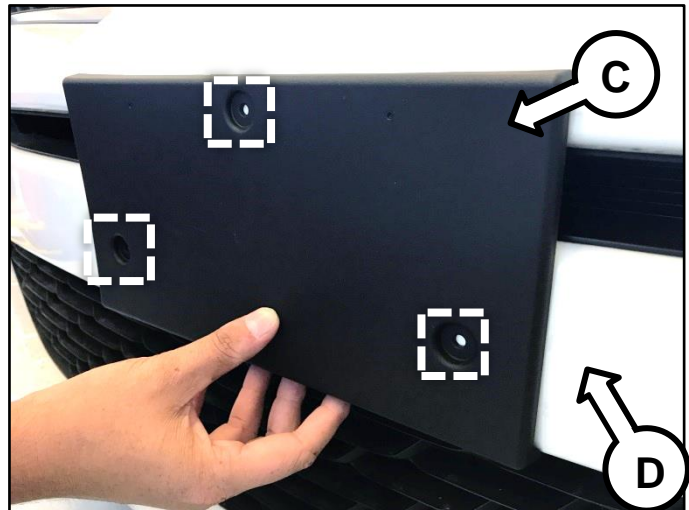

Examples of incorrect placement:



Bottom of bracket is not flush with the bottom of garnish and bottom holes of the bracket are not aligned with garnish dimples.



Bracket is upside down.