

Front Wheel Opening Extension Pad Installation During PDS

Service Category General

Section Pre-Delivery Service

Market USA

Lexus Supports
ASE Certification 

Applicability

YEAR(S)	MODEL(S)	ADDITIONAL INFORMATION
2018	GS F, GS300, GS350, GS450H	

Introduction

The front wheel opening extension pad set (right and left front wheel opening extension pads and self-tapping screws) is placed in the luggage compartment at the assembly plant to avoid damage in transit.

Install the front wheel opening extension pads to the vehicle prior to delivery to the customer.

Warranty Information

OP CODE	DESCRIPTION	TIME	OFP	T1	T2
N/A	Not Applicable to Warranty	—	—	—	—

Installation Procedure for GS 300/350/450h


1. Install the left front wheel opening extension pad in position with four of the self-tapping screws.

HINT

There is a distinguishable mark on each pad indicating the left and right side pad.

2. Install the right front wheel opening extension pad in the same manner as the left.

Figure 1.

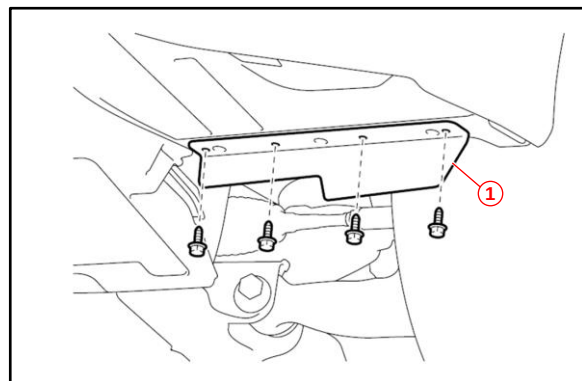

1

Front Wheel Opening Extension Pad

Front Wheel Opening Extension Pad Installation During PDS

Installation Procedure for GS F


1. Install the left front wheel opening extension pad in position with three of the self-tapping screws.

HINT

There is a distinguishable mark on each pad indicating the left and right side pad.

2. Install the right front wheel opening extension pad in the same manner as the left.

Figure 2.

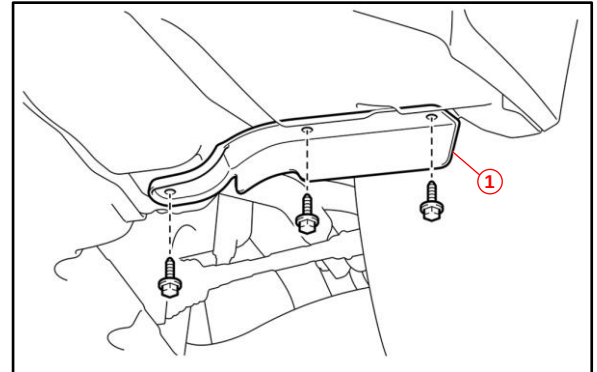

1

Front Wheel Opening Extension Pad