


Unit Injector Yoke Hold-Down Bolt Torque
Specification
VN, VHD, VAH, VT

FSB 237-020, Unit Injector Yoke Hold-Down Bolt Torque Specification

(June 2017)

VOLVO VN, VHD, VAH, and VT trucks built from 2009 to 2017 and equipped with 11, 13, and 16 liter engines (EM-USA10, EM-USA14, and EM-USA17), will require a new torque specification for the Unit Injector Yoke Hold-Down Bolt. Effective immediately, the torque value in step 3 has changed to 25 +5/-0 Nm (18 +4/-0 ft-lb). See the torque procedure in steps 1 through 4 below. Additionally, the new yoke hold-down bolt torque will be updated in all service procedures, methods, and specification manuals.

Note: If the unit injector yoke hold-down bolts are removed, do not reuse. The unit injector yoke hold-down bolts are made for one time use only.

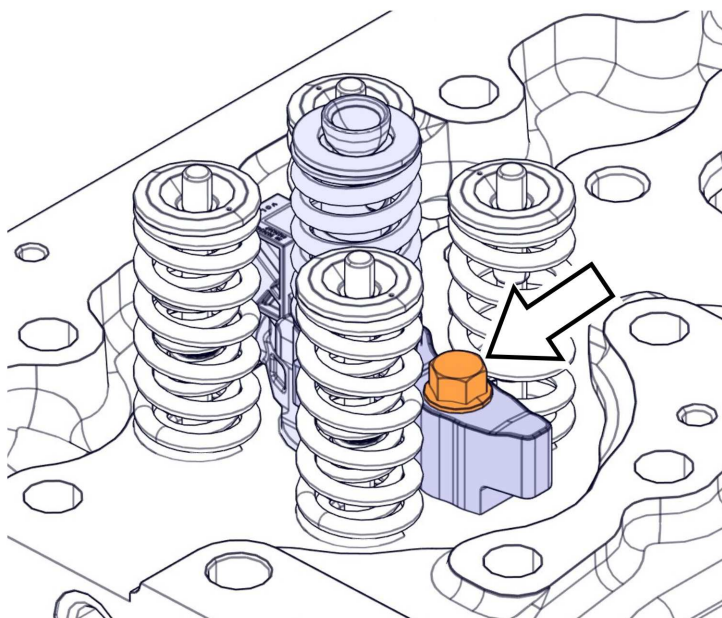

W2124666

Unit Injector Yoke Hold-Down Bolt Torque Procedure

- 1 Tighten 20 +5/-0 Nm (15 +4/-0 ft-lb).
- 2 Angle tighten 180 ± 5 Degrees.
- 3 Loosen until the torque is 25 +5/-0 Nm (18 +4/-0 ft-lb).
- 4 Angle tighten 90 ± 5 Degrees.