



# Ferrari North America

## Technical Information

Date: November 2017  
Bulletin #: 2452  
Campaign #:  
Supersedes:  
Section: 9

**Model Type:** 812 Superfast  
**Model Year:** All  
**Subject:** Installation of front and rear license plate holders


The instructions for fitting the front and rear license plate holders for the above model can be found below.

The vehicle is shipped from the factory with a specific kit for the destination market for installing the front and rear license plate holders.

The market-specific kit consists of:

- Complete front license plate holder
- Rear license plate holder;
- Bag containing fastener hardware for installing license plate holders.


The front (Fig. 1 ) and rear license plate holders (Fig. 2) must be installed in the center of the front or rear bumper.

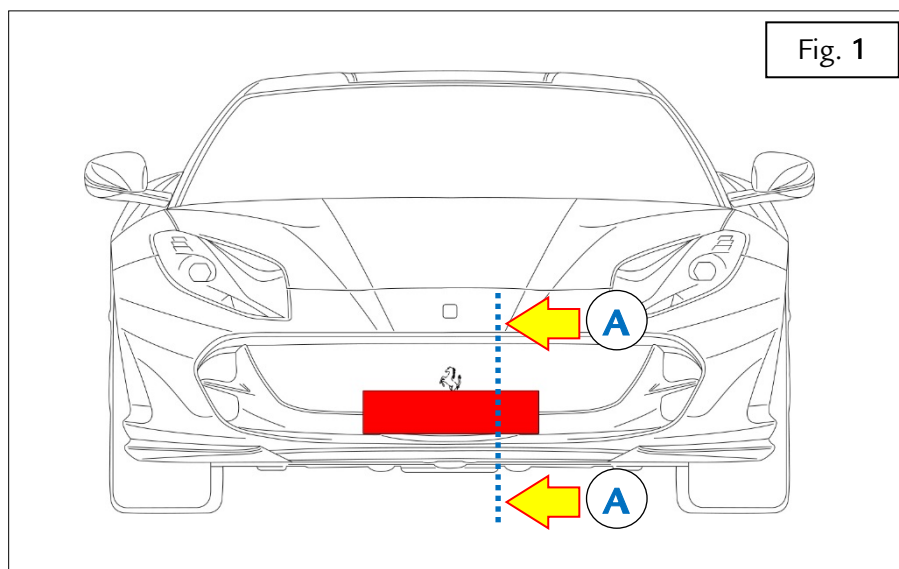



Ferrari North America

Fig. 2

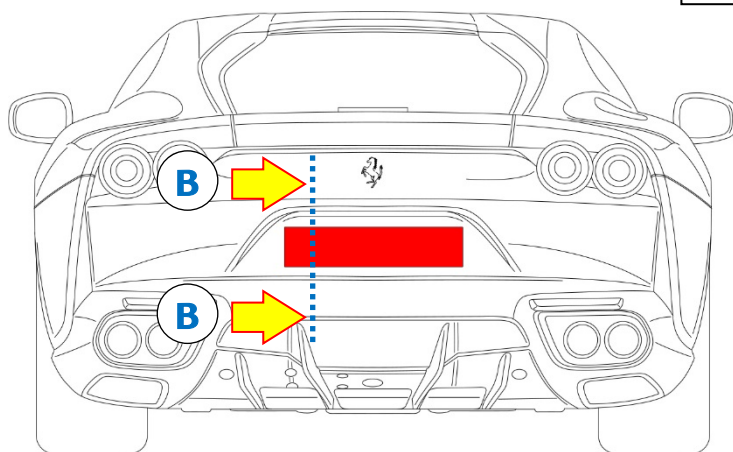

The template to be used for fitting the license plate holders is attached to the end of this Technical Information

#### Procedure

##### COMPLETE FRONT LICENSE PLATE HOLDER (Section A – Fig.1)

When fitting the complete license plate holder, ensure that:

- the license plate holder is absolutely centered with the centerline of the front bumper;
- the bottom of the license plate holder is absolutely parallel with the ground;


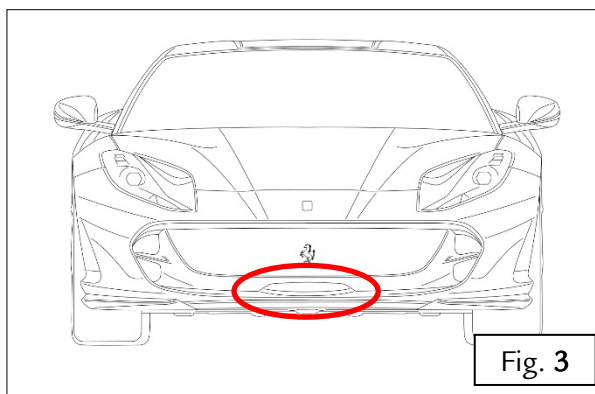


Fig. 3



## Ferrari North America

- Identify the area where the complete front license plate holder will be fitted on the front bumper –Fig. 3.
- Print the template attached to this document ensuring that the option 'Scale to paper size' is set to “No Scaling” (DO NOT RESIZE THE PAGE).
- After printing, check with a ruler that the height is correct.
- Cut out the template and join the two parts together.
- Identify the border between the painted part of the front bumper and the area in matte black indicated by the yellow dotted line in Fig. 4. In the figure, this border must be the base for the two upper edges of the template.  
**Note:** Fig. 4 is an example of a European template.
- Take the template and align it horizontally with its upper edges against the border between the painted part and the matte black area of the bumper.

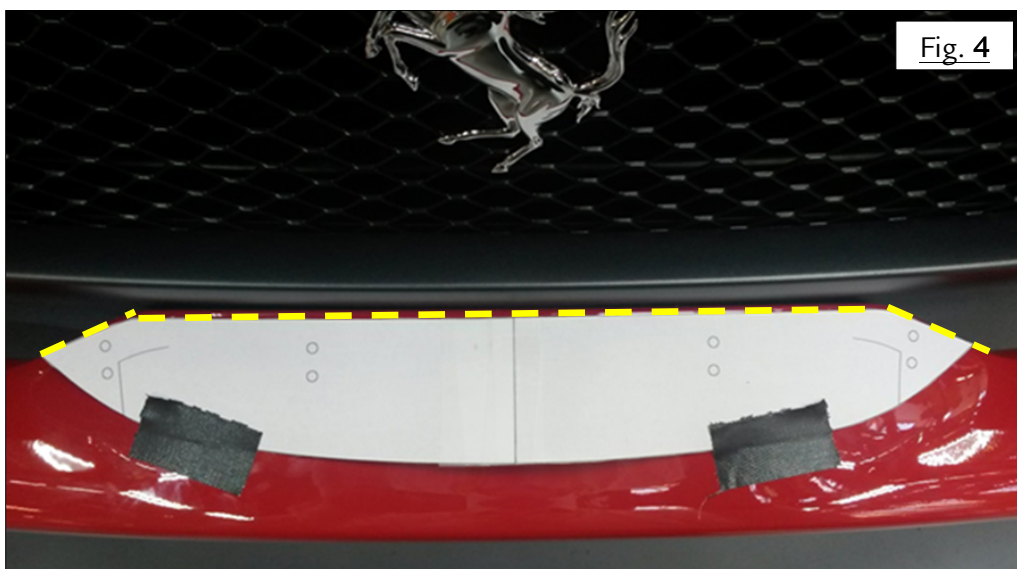

- Fix the template to the front bumper ensuring that it is aligned in the correct position as described above.
- Using a drill with a suitable bit, drill 8 holes in the positions marked on the template
- Place the complete front license plate holder over the holes drilled previously.
- Fix the license plate holder using the supplied rivets




# Ferrari North America

## REAR LICENSE PLATE HOLDER (Section B – Fig. 2)

When fitting the rear license plate holder (Fig. 2), ensure that:

- the license plate holder is absolutely centered with the centerline of the rear bumper;
- Height Z (shown in Fig. 5) is 34mm.


### Table A

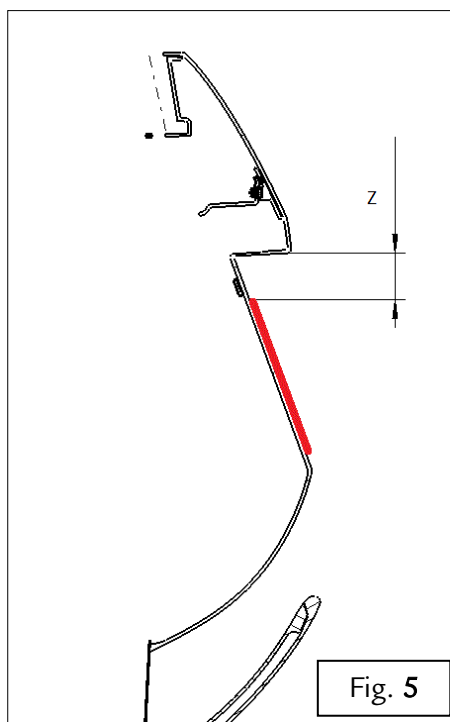

- Place the license plate holder as indicated, aligning it from above according to the market, using the values indicated in **Table A**– Fig.11




## Ferrari North America

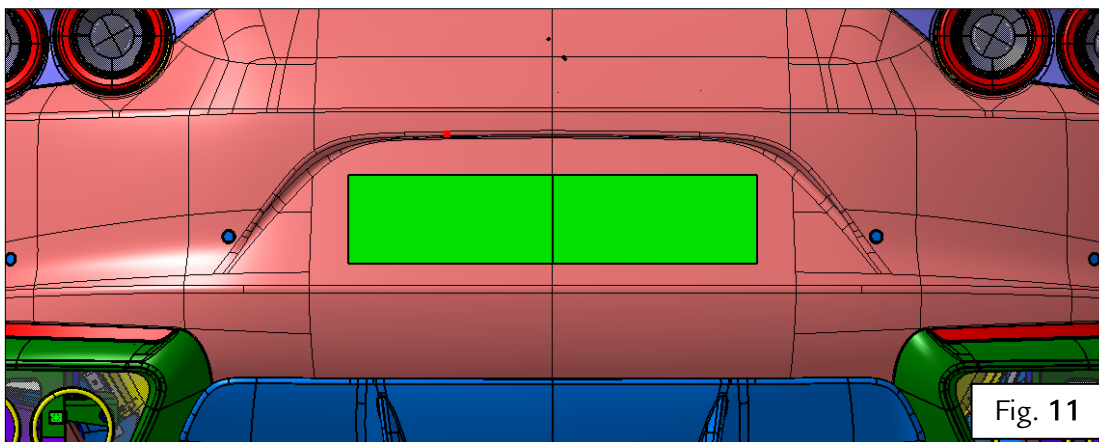


- Mark the positions of the four holes for the license plate holder on the rear bumper with the license plate holder positioned correctly as described.
- Using a drill with a suitable bit, drill four holes in the positions marked.
- Place the rear license plate holder over the holes drilled previously.
- Fix the license plate holder using the supplied rivets.

Thank you for your co-operation.

# USA VERSION TEMPLATE

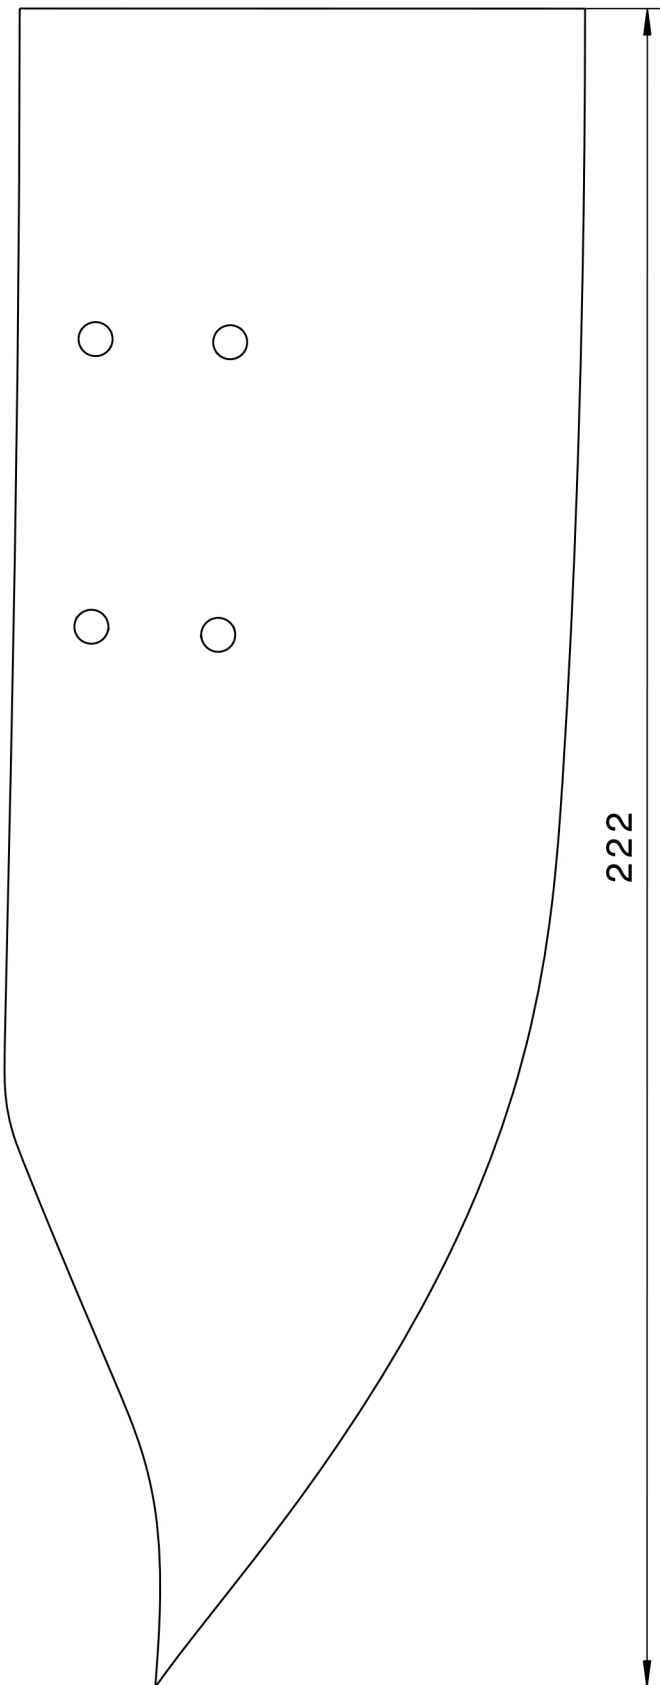

Left Side  
Dimension in mm

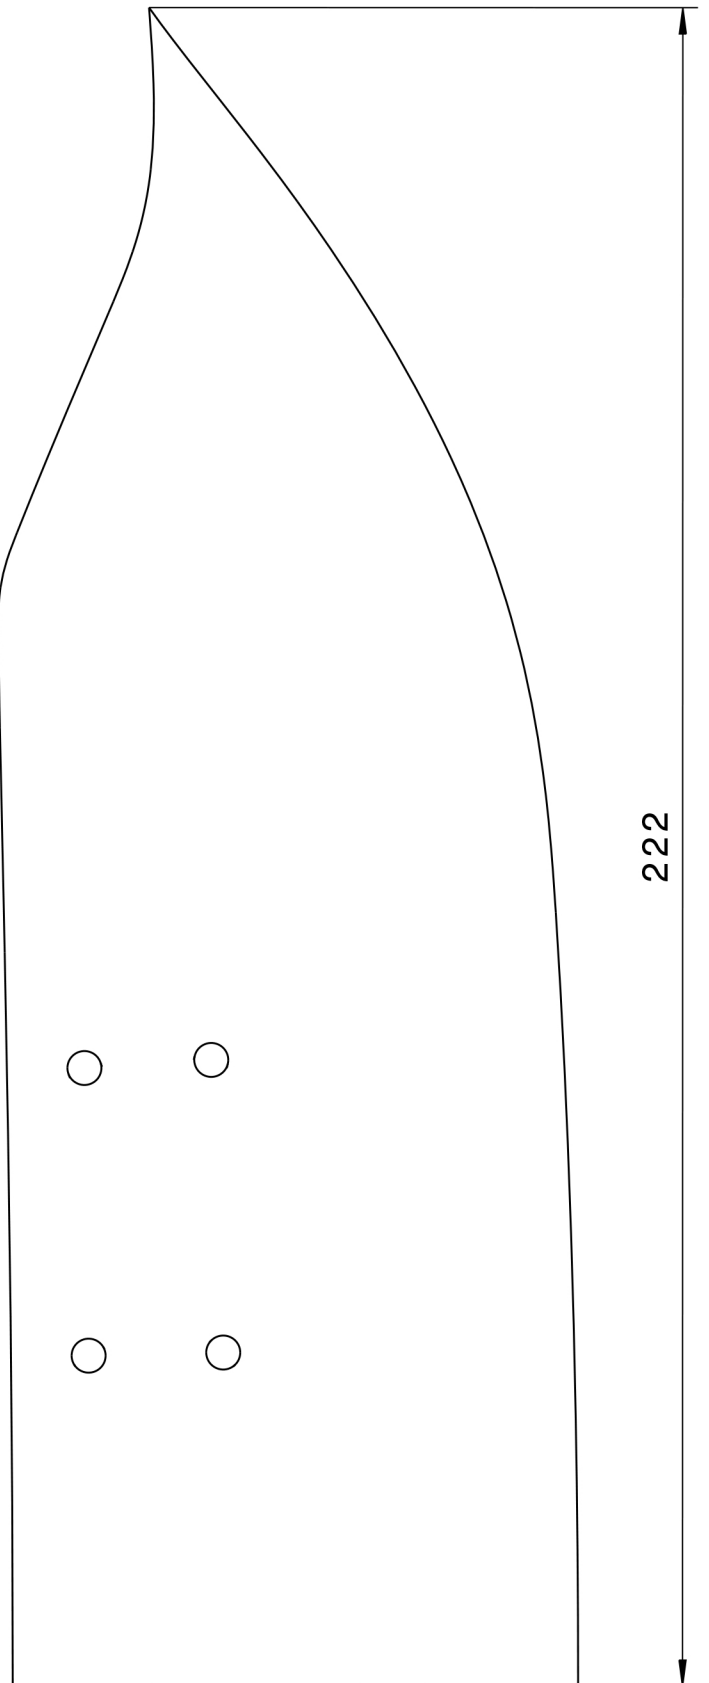

Right Side  
Dimension in mm