



SERIES 5100 / 5140 OUTSWING DOOR

An outswinging entrance door that combines beauty, durability and efficiency. It is completely prehung, ready to install. The 5100 features a screw cover channel and flat mounting flange.

Standard Features

- Strong welded aluminum frame with integral weather baffle
- Three extruded hinges, complete with stainless steel bushings, join the core to the frame
- Heavy, damage-resistant fiberglass panels are securely bonded to the core
- Effective insulating foam core
- High density foam lock block
- Welded galvanized stile frame is precambered on the lock side to promote a tight seal
- Core is surrounded by extruded aluminum
- Core is edge bored and capped for easy addition of deadbolt
- Bulb vinyl on all four sides forms the primary sealing system
- Extruded flap vinyl on all four sides of the frame forms the secondary seal
- Manufactured to comply with the HUD standard 3280-405

Options Available

- Stainless steel or flush locksets
- Stainless steel deadbolts
- Painted frame

Sizes

- Call Widths: 14"-48"
- Call Heights: 14"-80"
- Frame Depth: 1.231"
- Core Thickness: 1³/₈"
- Rough Opening Dimensions:
Call Width = Rough Opening Dimension
Call Height = Rough Opening Dimension
(Example: 28" x 76" Call Size - 28" x 76" Rough Opening)



Available Window Styles



1.) Blank



2.) Picture
4" x 24" Window



3.) 9-Lite
Also available with
insulated glass




4.) Diamond Window



6.) Slider 14" x 27"
Storm Window
Available

SERIES 5100 / 5140 CAMBERED DOOR

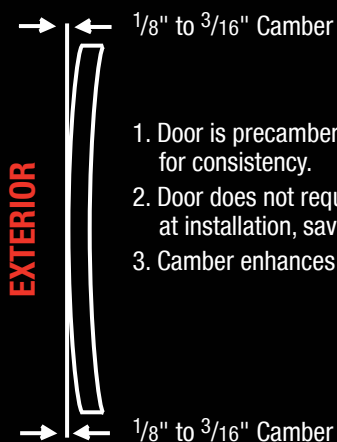

1. Door is precambered at manufacture for consistency.
2. Door does not require adjustment of camber at installation, saving time and money.
3. Camber enhances weather tight seal.



ADVANCED DOOR SOLUTIONS FOR OVER 40 YEARS