



Countries:
Availability:
Major System: BUS BODY
Current Language: English
Other Languages: NONE
Viewed: 38

Document ID: IK2200139
Revision: 0
Created: 12/11/2017
Last Modified: 12/17/2017
Author: Brandon Akridge

[Less Info](#)

Hide Details

Coding Information

Copy Link 	Copy Relative Link 	Bookmark View My Bookmarks	Add to Favorites 	Print 	Provide Feedback 	Helpful 0	Not Helpful 0
---------------	------------------------	---	----------------------	-----------	----------------------	------------------	----------------------

Title: Driver's seat belt tongue button

Applies To: IC Bus

CHANGE LOG

Please refer to the change log text box below for recent changes to this article:

12/11/2017 - Initial Article Release

DESCRIPTION

Newly released design change to seatbelt tongue is not self gripping and requires a button to retain at a height the driver's can reach. This button was left off the drawing by mistake and thus the parts supplied did not incorporate it either, so tongue falls to the floor when not used. Part numbers affected (4091405c1 thru 4091408c1)

SYMPTOM(s)

Seat belt tongue falls to floor, as shown in picture below.



SPECIAL TOOL(s) / SOFTWARE

N/A

Tool Description	Tool Number	Comments	Instructions

SERVICE PARTS INFORMATION

Kit Description	Part Number	Quantity Required	Notes
For parts contact your local CSE.		1	

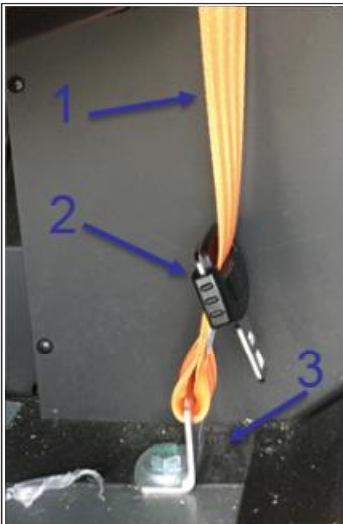
DIAGNOSTIC STEP(s)

 WARNING:	
Enter Warning Here	

CAUTION:	
-----------------	--

Enter Caution Here

Step	Action	Decision
#	DIAGNOSTIC: Does Driver's Seatbelt tongue fall to floor as shown in Figure 1 below?	Yes. Proceed to Repair section
		No. Repair is not required.

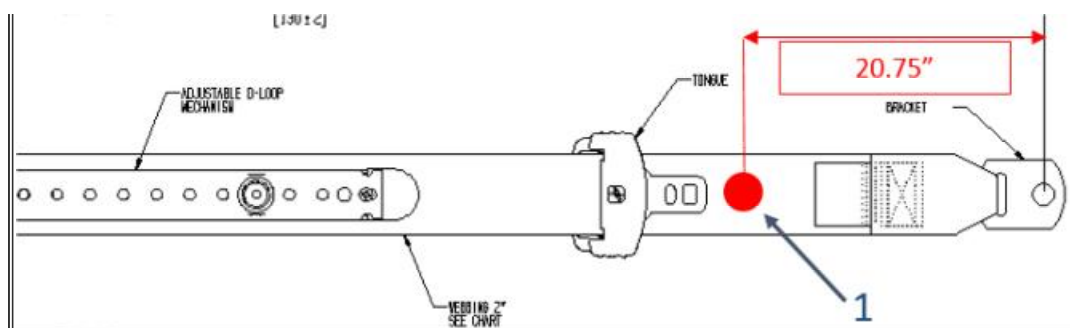
**Figure 1**

Item 1: Seat Belt
Item 2: Tongue
Item 3: Floor

REPAIR STEP(s)

INSTALLATION PROCEDURE:

A button will be installed on the seat belt webbing to retain the tongue at a height the driver's can reach.

**Figure 2: button positon**

Item 1: Button Location

1. Measure from floor up seat belt 20.75" and mark location as illustrated in Figure 2
2. Take item 1 in Figure 3 and hold sharp end on the mark from step 1.
3. Take item 2 in Figure 3 and align on opposite side of seat belt from item 1.
4. Use pliers to compress item 1 and item 2 together, until you see item 1's tip inserted into center hole of item 2, and snaps into place.

**Figure 3: Button (the side shown touches seat belt)**

Item 1: Button Front

Item 2: Button Back

WARRANTY INFORMATION

Warranty Claim Coding:

Refer to the [Warranty Coding Manual](#) for Group and Noun Codes.

Standard Repair Time(s):

Refer to the [SRT Manual](#) for Repair Times

OTHER RESOURCES

[Master Service Information Site](#)

Hide Details

Feedback Information

Viewed: 37

Helpful: 0

Not Helpful: 0

No Feedback Found

