

Installation of hood seal, model 253

Topic number	LI88.40-P-065543
Version	1
Design group	88.40 Engine hood, front flap
Date	01-12-2017
Validity	Model 253
Reason for change	
Reason for block	

Complaint:

Install forward hood seal on model 253

Cause:

WIS instructions in development

Remedy:

1. Cut the seal to a length of 790 mm.
2. Clean the adhesive surface (Photo 1) on the inside of the engine compartment.
3. Adhere the seal to the hood (Photo 2)

Note: The seal runs just behind or along the edge (Photo 3)

Note: The opening (Photo 3) of the gasket points towards the rear of the vehicle

Attachments	
File	Description
Photo 1.JPG	area to clean surface
Photo 2.JPG	location for installation
Photo 3.JPG	seal orientation

Symptoms
Body / Body/Cab / Trim strip/cover / Missing
Body / Body/Cab / Trim strip/cover / Damaged
Body / Door/Flap / Hood/flap / Engine hood / Flutters
Body / Body/Cab / Trim strip/cover / Detaches

Parts						
Part number	ES1	ES2	Designation	Quantity	Note	EPC
A 204 727 11 87			Circumferential seal	1	cut to length of 790mm	X

XENTRY TIPS

Attachments

Photo 1.JPG:


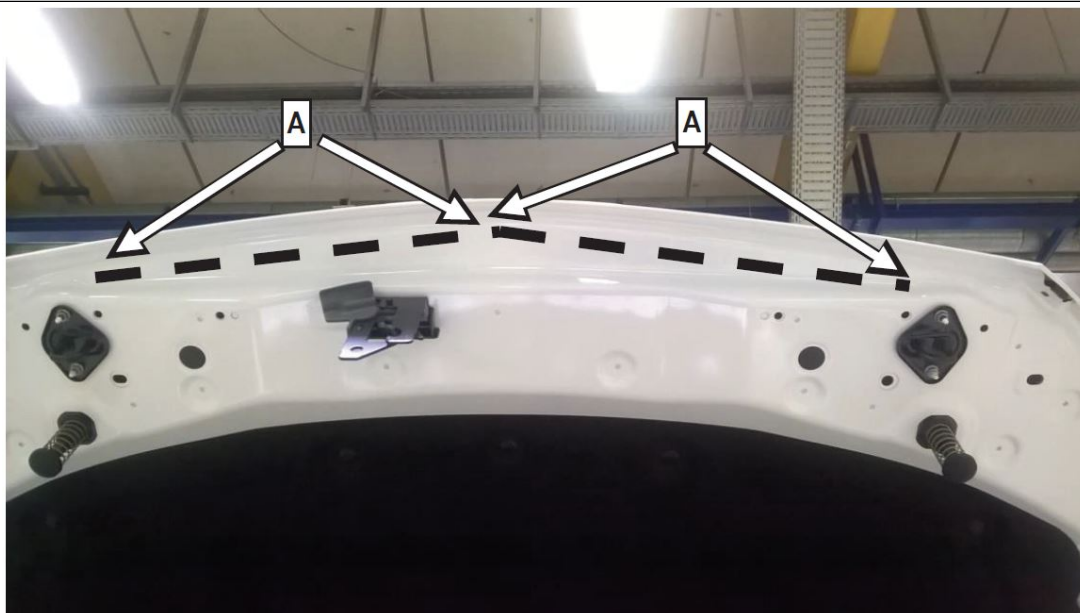


Photo 2.JPG:



XENTRY TIPS

Photo 3.JPG:

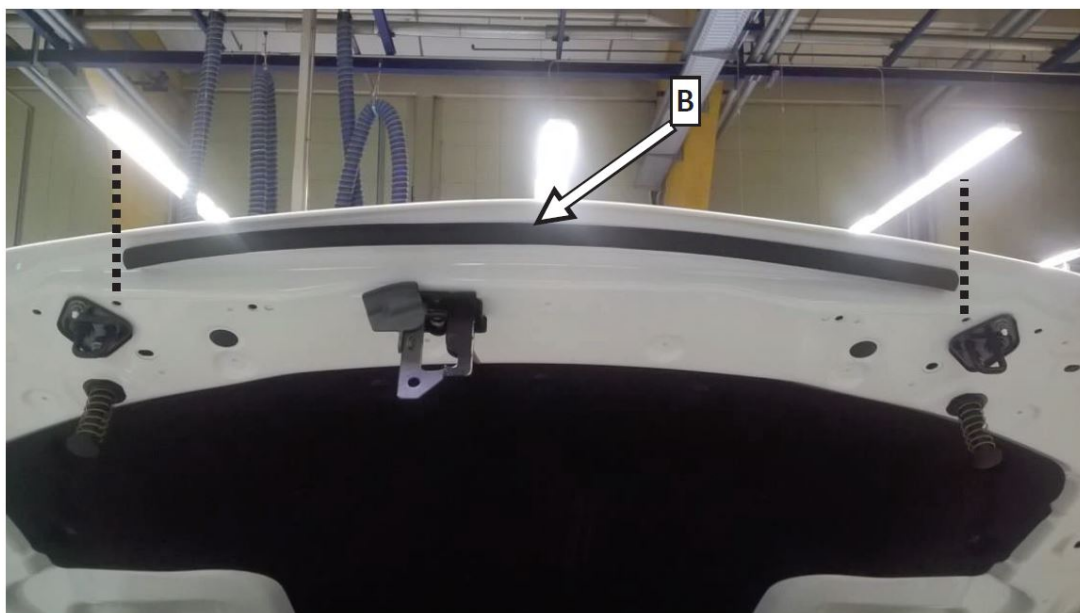