

Technical Journal

TITLE:

Rear door, water intrusion

REF NO:	ISSUING DEPARTMENT:	CAR MARKET:		
TJ 31542.1.1	Technical Service	United States and Canada		
	PARTNER:	ISSUE DATE:	STATUS DATE:	
3 US 7	7510 Volvo Car USA	2017-01-05	2017-01-10	
FUNC GROUP:	FUNC DESC:			
8400	Outside trim parts, glass, sealing mould	Page 1 of 7		

[&]quot;Right first time in Time"

Attachment

File Name	File Size
TJ 31542.pdf	1.1025 MB

Vehicle Type

Type	Eng	Eng Desc	Sales	Body	Gear	Steer	Model Year	Plant	('hassis range	Struc Week Range
256							2016-2017		0000561-0123421	201505-201628

CSC Customer Symptom Codes

Code	Description
R2	Doors/Water leakage/Rear side door

VST Operation Number

VST Operation Number	Description
98630-2	Scraper moulding side door adjust acc. to TJ31542

DTC Diagnostic Trouble Codes

Rows beginning with * are modified

Note! If using a printed copy of this Technical Journal, first check for the latest online version.

Text

Technical Journal 31542.1.1



DESCRIPTION:

*Updated structure week.

Water may accumulate on the rear door sill. Water may come out of the lower edge of the rear doors when opening the rear doors.

SERVICE:

Please follow attached service instructions.

VEHICLE REPORT:

Yes, please submit a Vehicle Report if the service solution described in this TJ has no effect. Use concern area "Vehicle Report" and sub concern area "Support not needed", use function group 8400.

To view TJ attachment continue to next page. This TJ has one attachment.

Page 2 of 7 2017-01-10

VOLVO	
	,

Volvo Car Customer Service


TJ 31542

Title	Weatherstrip, door window, rear	Page	1 (5)
Action	Adjustment	Operation number:	98630-2

Affected vehicles


Model year		Model		
2016, 201	7	XC90		

Color symbols




Note! This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.

- Used for focused component, the component with which you will do something.
- 2. Used as extra colors when you need to show or differentiate additional parts.
- Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4 . Used when the component is not fully removed from the vehicle but only hung to the side.
- 5. Used for standard tools and special tools.
- 6 . Used as background color for vehicle components.

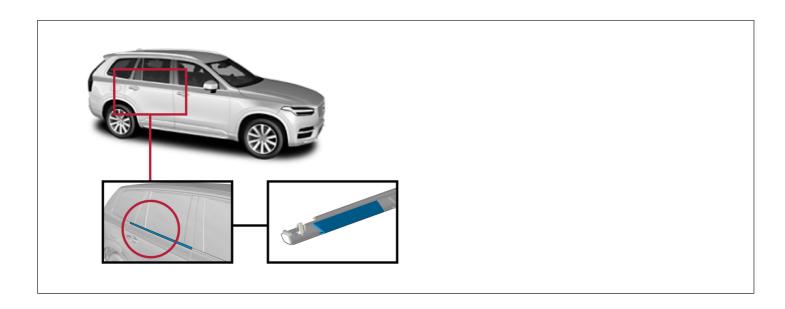

TJ 31542 Page 3 (5)


Removal

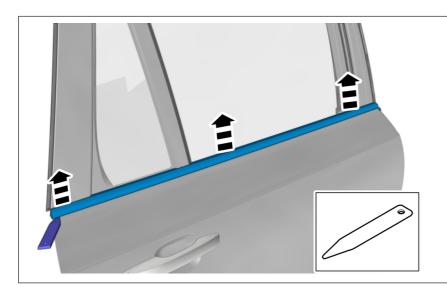


Caution! Make sure that the component is not bent.


Remove the marked part. On both sides.

Installation

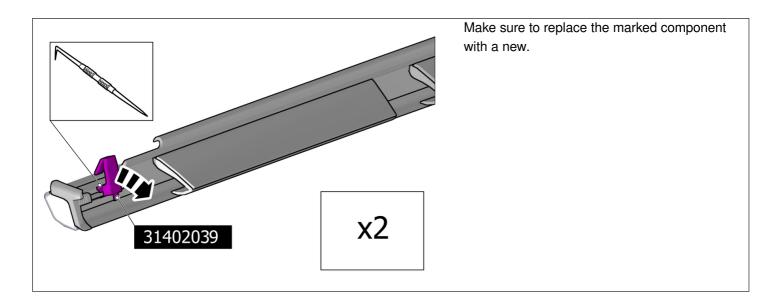

TJ 31542 Page 4 (5)

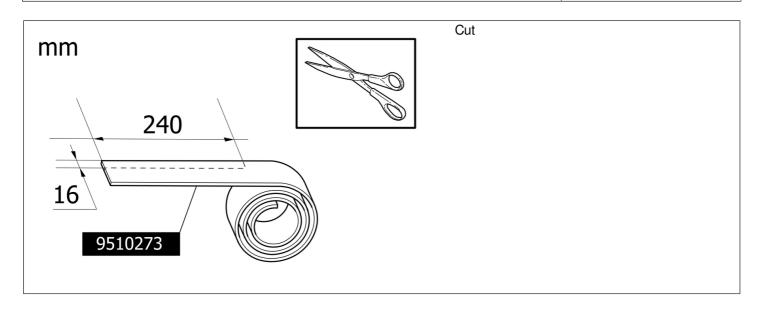


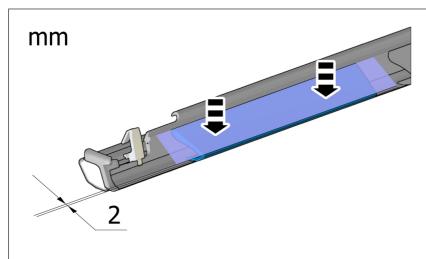


Caution! Make sure that the surface is clean and free of foreign material.

Caution! Make sure that the surface is at a minimum temperature of 20°C.


Note! Ensure that the tape is fixed to the surface.

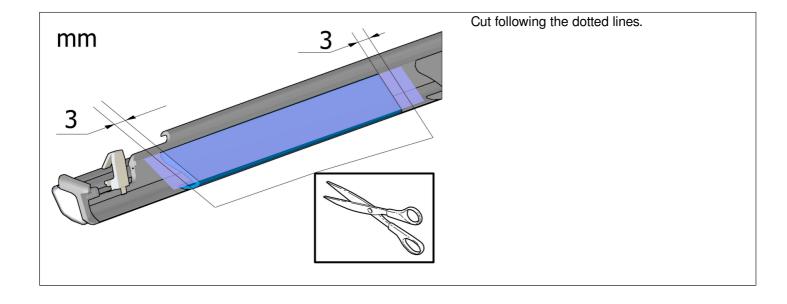

TJ 31542 Page 5 (5)

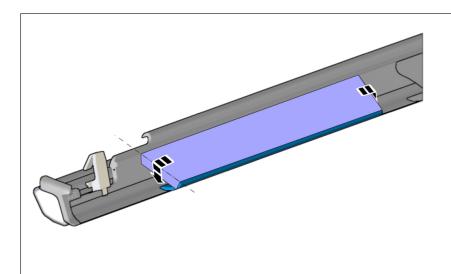

Note! Make sure that the tape has not detached from the edges of the component.

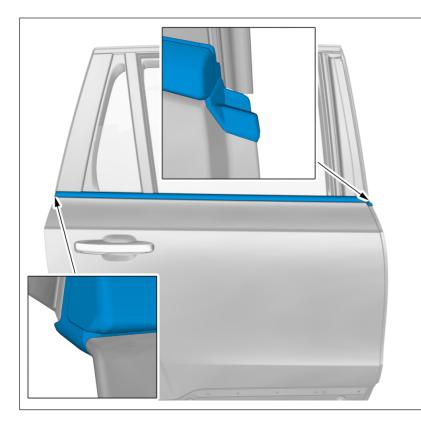

Caution! Take extra care when handling the component.