



Technical Journal

TITLE:

Service Action: S89809 Trim Moulding Side Doors

REF NO: TJ 32228.1.1	ISSUING DEPARTMENT: Technical Service	CAR MARKET: United States and Canada	
PARTNER: 3 US 7510 Volvo Car USA		ISSUE DATE: 2016-12-19	STATUS DATE: 2017-02-07
FUNC GROUP: 8400	FUNC DESC: Outside trim parts, glass, sealing mould	Page 1 of 6	

“Right first time in Time”

Attachment

File Name	File Size
TJ 32228.pdf	0.6910 MB

Vehicle Type

Type	Eng	Eng Desc	Sales	Body	Gear	Steer	Model Year	Plant	Chassis range	Struc Week Range
234							2017-2017	21	0000201-0003685	0-0

CSC Customer Symptom Codes

VST Operation Number

DTC Diagnostic Trouble Codes

Rows beginning with * are modified

Note! If using a printed copy of this Technical Journal, first check for the latest online version.

Text

DESCRIPTION:

Volvo Car USA LLC and Volvo Car of Canada Ltd (Volvo) on behalf of Volvo Car Corporation, has decided to launch Service Campaign S89809 on certain model year 2017 S90 vehicles. Volvo has identified that the exterior door trim moldings may crack.



SERVICE:

Replace all four (4) exterior trim molding on eligible vehicles.

VEHICLE REPORT:

N/A

To view TJ attachment continue to next page. This TJ has one attachment.



Volvo Car Customer Service

TJ 32228

Title	Decor panel	Page	1 (4)
Action	Adjustment	Operation number:	97075-2

Issue	Date	Reason
1	2016-11	First issue


Affected vehicles

Model year	Model
2017	S90 (17-)

Materials


Materials	Qty.	Part No.	Notes
Trim moulding	1.0	31672262	
Trim moulding	1.0	31672263	
Trim moulding	1.0	31672264	
Trim moulding	1.0	31672265	
Paint primer	0.2	31480527	US;
Paint primer	0.2	31480528	CA;

Color symbols

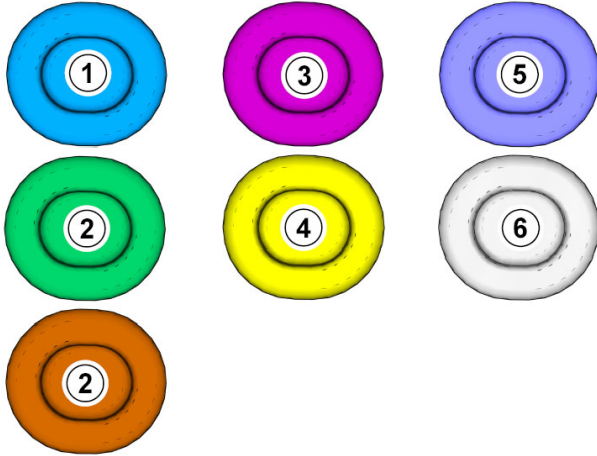


Note! This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.

- 1 . Used for focused component, the component with which you will do something.
- 2 . Used as extra colors when you need to show or differentiate additional parts.
- 3 . Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4 . Used when the component is not fully removed from the vehicle but only hung to the side.
- 5 . Used for standard tools and special tools.
- 6 . Used as background color for vehicle components.

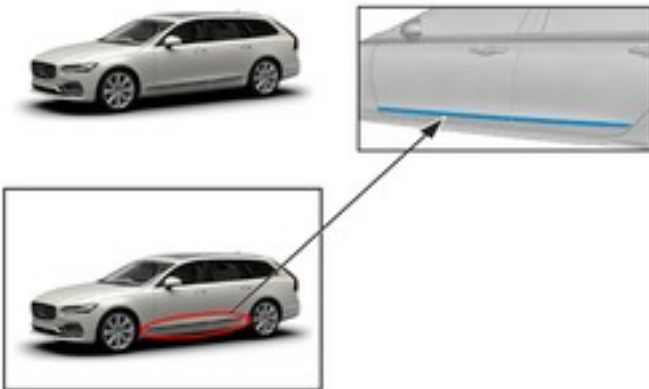

Note! Orientation view

Removal

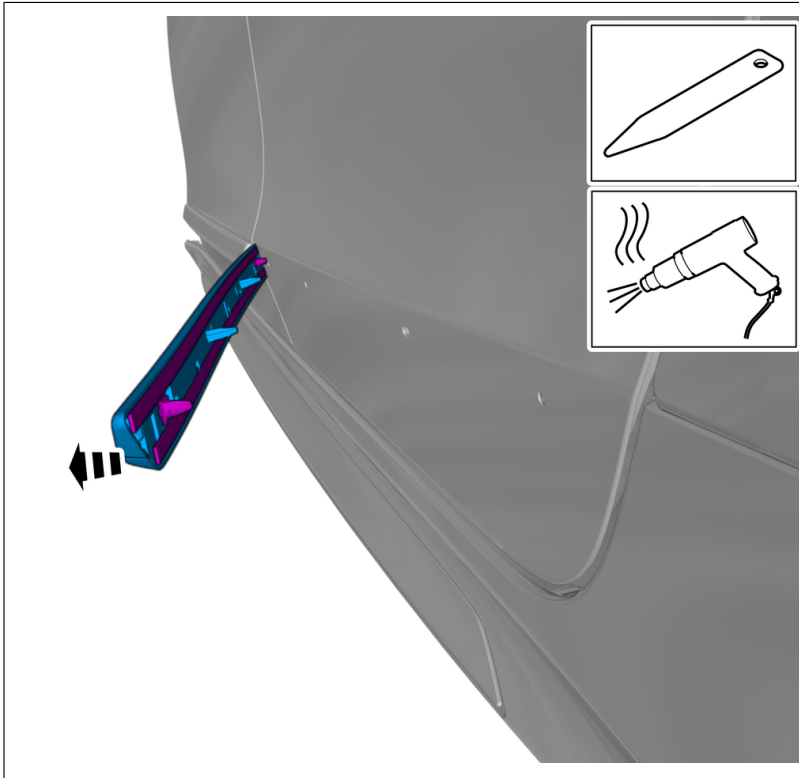


On both sides.

Remove trim moldings.

Use: Cleaning agent


Apply a thin layer of primer.

Installation

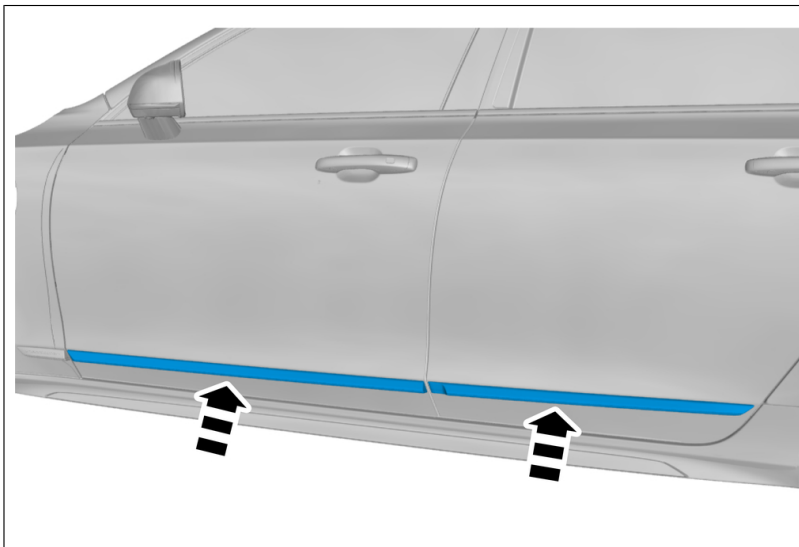


Note! Make sure that the mating faces are at a minimum temperature of 20°C.

Note! Press and apply pressure to the part over the tape for at least 20 seconds.

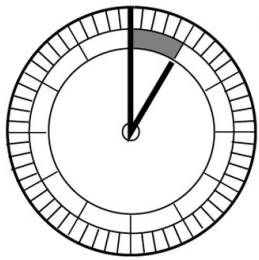


1h

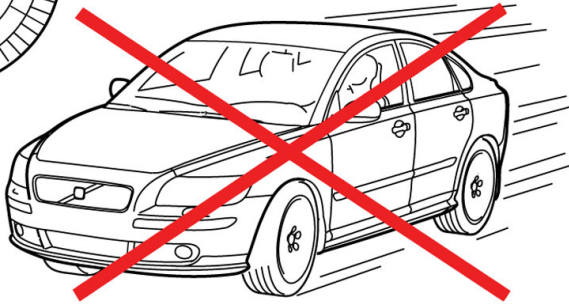

Caution! After installing the component, wait for a minimum of 1 hour before driving the vehicle.

72h

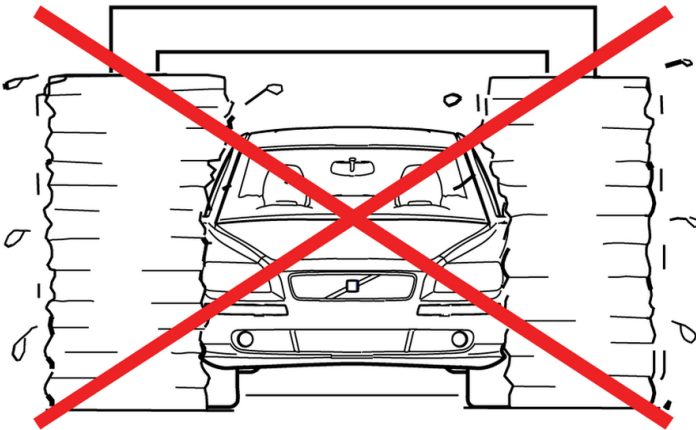

Note! Make sure that the customer is advised not to wash the vehicle within the next 72 hours.