



Technical Journal

TITLE:

Front seat backrest, noise

REF NO: TJ 33518.1.0	ISSUING DEPARTMENT: Technical Service	CAR MARKET: United States and Canada	
PARTNER: 3 US 7510 Volvo Car USA		ISSUE DATE: 2018-05-03	STATUS DATE: 2018-05-10
FUNC GROUP: 8521	FUNC DESC: Front seat, complete	Page 1 of 8	

“Right first time in Time”

Attachment

File Name	File Size
TJ 33518.pdf	1.4297 MB

Vehicle Type

Type	Eng	Eng Desc	Sales	Body	Gear	Steer	Model Year	Plant	Chassis range	Struc Week Range
536							2019-9999		0000329-0999999	201746-999952

CSC Customer Symptom Codes

Code	Description
ZD	Front seat/Squeak/rattle

VST Operation Number

VST Operation Number	Description
98708-2	Seat front 1 pc adjust acc. TJ33518

DTC Diagnostic Trouble Codes

Text

**DESCRIPTION:**

If a creaking/rubbing noise is heard from the front seats backrest, follow the instruction under Service.

SERVICE:

Insert double layers of anti-squeak tape, p/n 30788314 under the lumbar hooks. Follow attached instructions.

VEHICLE REPORT:

Yes, please submit a Vehicle Report if the service solution described in this TJ has no effect. Use concern area "Vehicle Report" and sub concern area "Support not needed", use function group 8521.

To view TJ attachment continue to next page. This TJ has one attachment.



Volvo Car Customer Service

TJ Instruction VCC-511455-1

Title	Front seat backrest	Page	1 (6)
Action	Product fix	Operation number:	98708-2

Issue	Date	Reason
1	2018-04	First issue

Affected vehicles


Model year	Model
2018	XC40

Materials


Materials	Qty.	Part No.	Notes
Anti-squeak tape	0.1	30788314	

Removal

Note! Removal steps in this procedure may contain installation details.

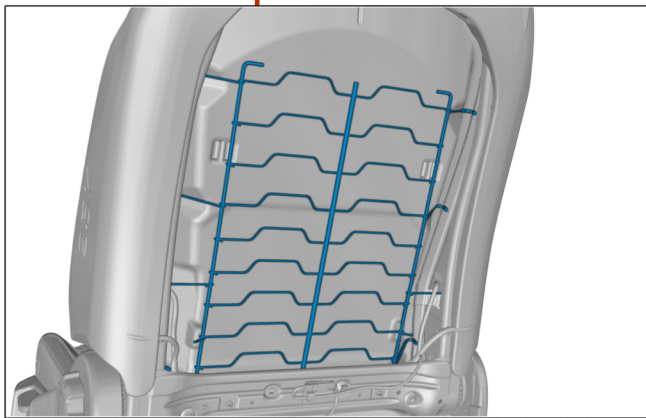


Color symbols

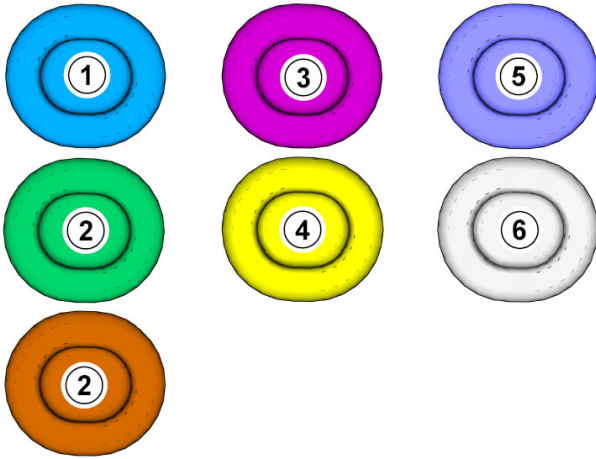



Note! This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.

- 1 . Used for focused component, the component with which you will do something.
- 2 . Used as extra colors when you need to show or differentiate additional parts.
- 3 . Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4 . Used when the component is not fully removed from the vehicle but only hung to the side.
- 5 . Used for standard tools and special tools.
- 6 . Used as background color for vehicle components.

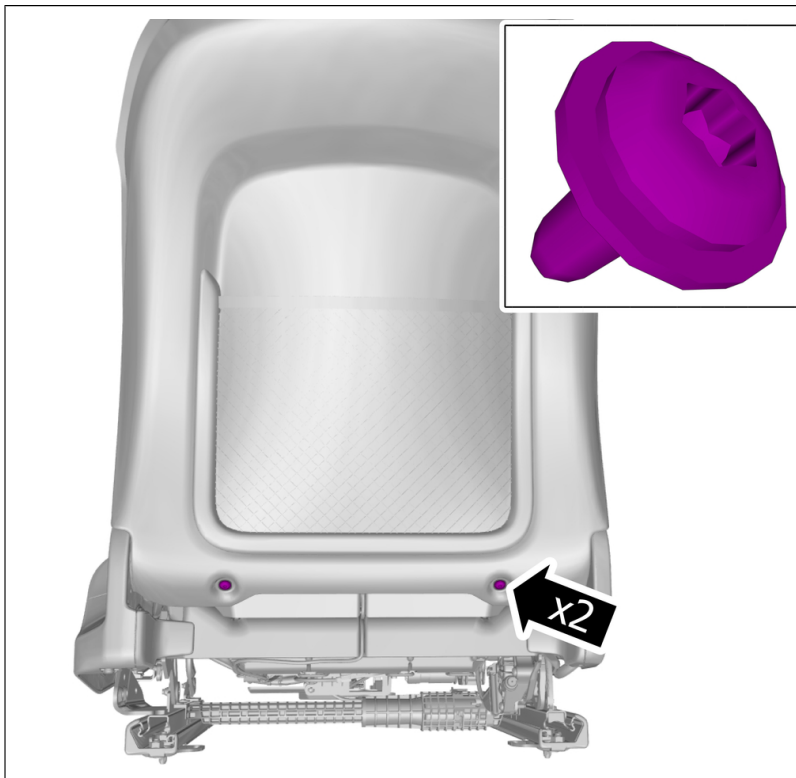


Remove the screws.

Orientation view

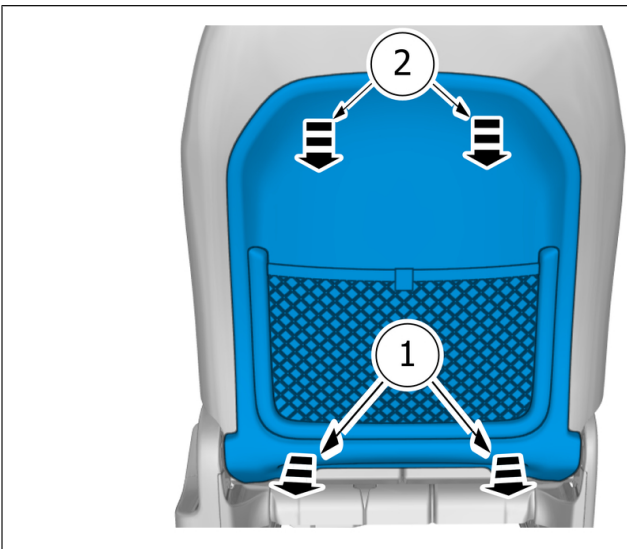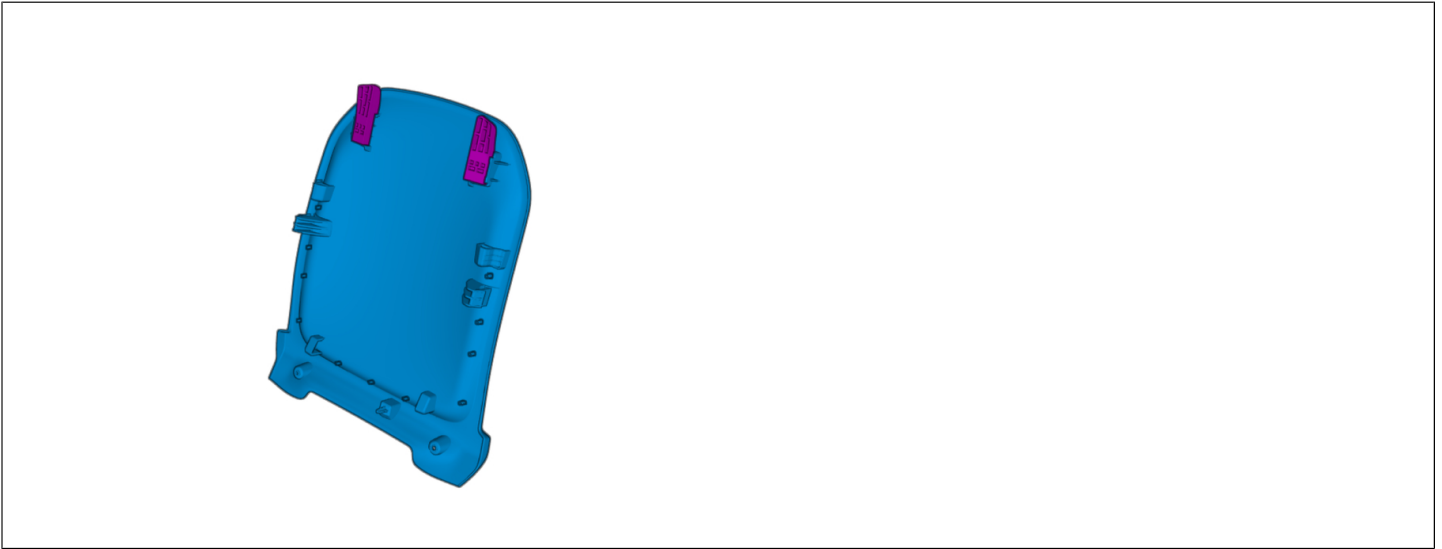

Remove the marked part.

x12






Use: Anti-squeak tape , 30788314

← 50 mm →



↑ 10 mm ↓

x6

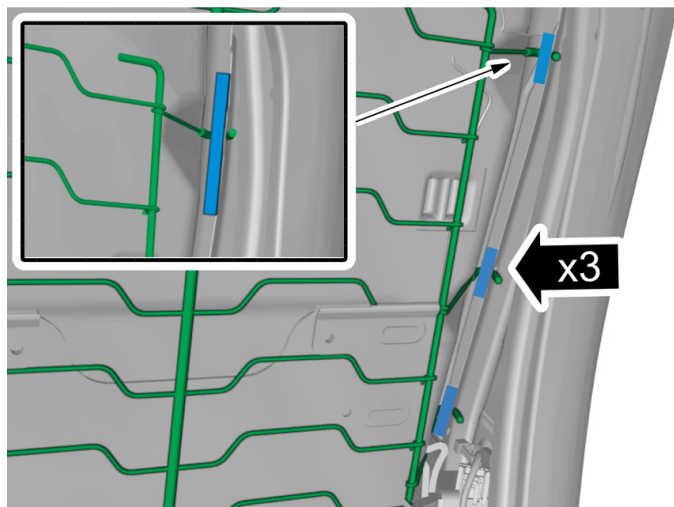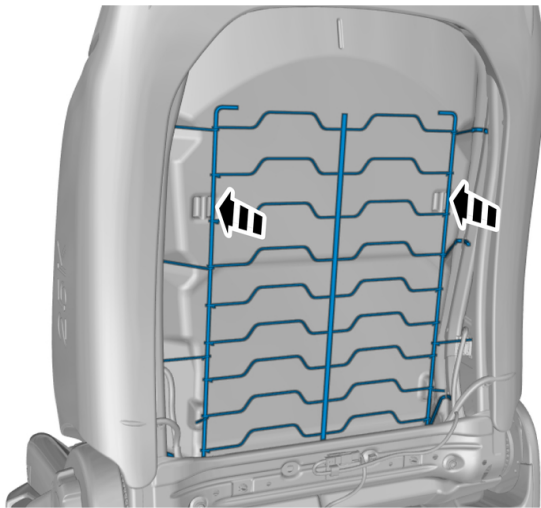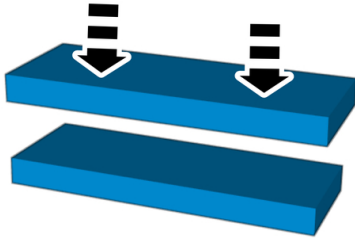

Note! Only use the specified material.

Install the marked components.

On both sides.

Installation

To install, reverse the removal procedure.