



Technical Journal

TITLE:

Rear wiper cover scratching rear window

REF NO: TJ 33339.1.0	ISSUING DEPARTMENT: Technical Service	CAR MARKET: United States and Canada	
PARTNER: 3 US 7510 Volvo Car USA		ISSUE DATE: 2018-03-05	STATUS DATE: 2018-03-12
FUNC GROUP: 3637	FUNC DESC: Wiper arm	Page 1 of 5	

“Right first time in Time”

Attachment

File Name	File Size
TJI-511185-1_1_0_en-US.pdf	0.4053 MB

Vehicle Type

Type	Eng	Eng Desc	Sales	Body	Gear	Steer	Model Year	Plant	Chassis range	Struc Week Range
246							2018-9999		0000389-9999999	201717-999952

CSC Customer Symptom Codes

Code	Description
8R	Rear window/Glass broken/chipped/cracked/distorted
9P	Rear window wiper/Unusual noise

VST Operation Number

VST Operation Number	Description
99922-2	Rear wiper cover adjust acc. to TJ

DTC Diagnostic Trouble Codes

Text

**DESCRIPTION:**

If the rear wiper arm cover has contact with the rear window, follow the instructions under service.

SERVICE:

Modify the rear wiper cover according to the attached instruction.

VEHICLE REPORT:

Yes, please submit a Vehicle Report if the service solution described in this TJ has no effect. Use concern area "Vehicle Report" and sub concern area "Support not needed", use function group 3637.

To view TJ attachment continue to next page. This TJ has one attachment.



Volvo Car Customer Service

TJ Instruction VCC-511185-1


Title	Wiper blade and wiper arm rear adjustment	Page	1 (3)
Action	Product fix	Operation number:	99922-2

Issue	Date	Reason
1	2018-02	First issue

Affected vehicles

Model year	Model
2018	XC60 (18-)


Color symbols

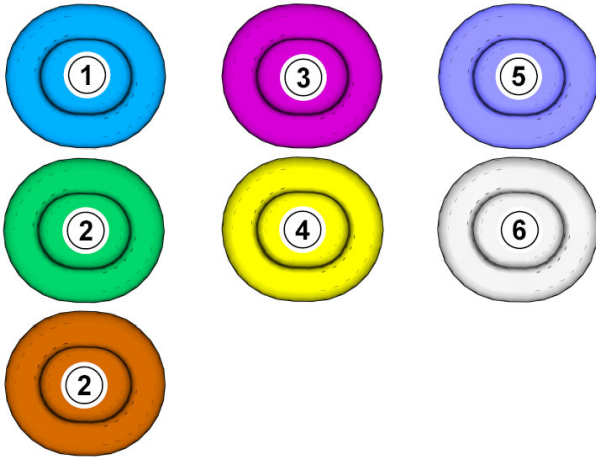

Note! This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.


- 1 . Used for focused component, the component with which you will do something.
- 2 . Used as extra colors when you need to show or differentiate additional parts.
- 3 . Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4 . Used when the component is not fully removed from the vehicle but only hung to the side.
- 5 . Used for standard tools and special tools.
- 6 . Used as background color for vehicle components.

Removal

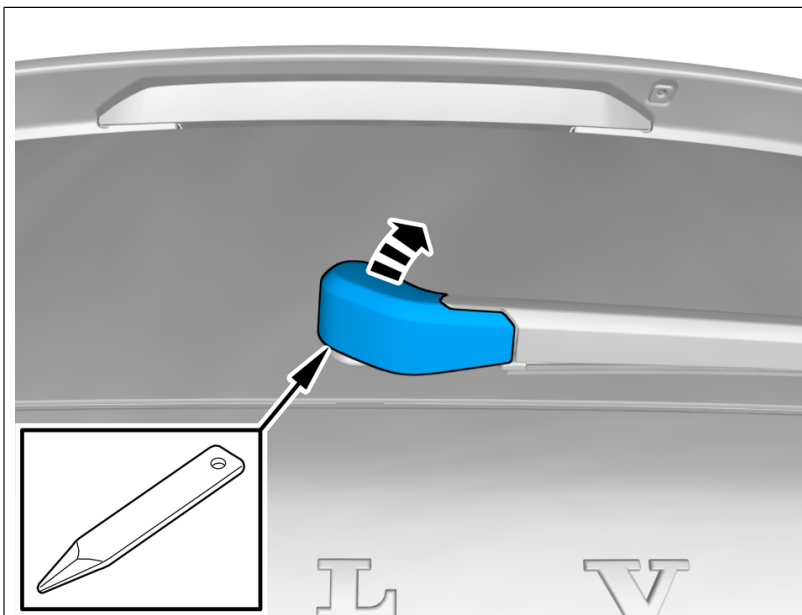


Remove the marked part.

Note! Orientation view

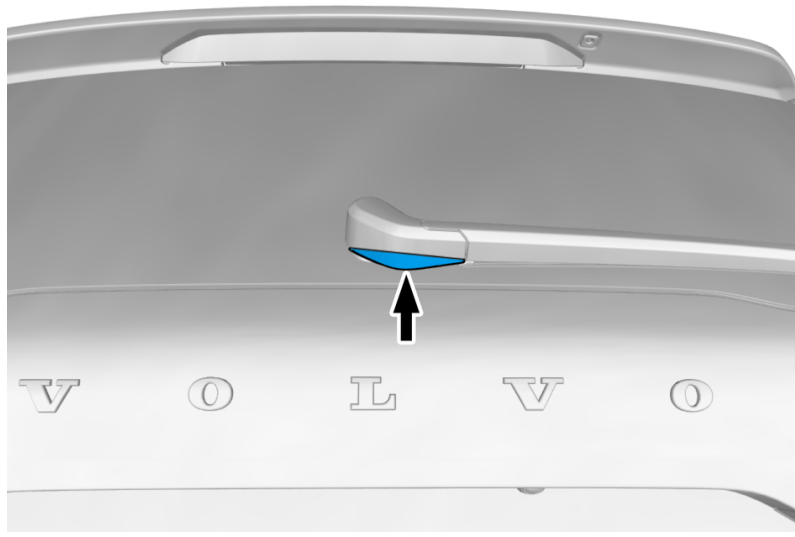

mm

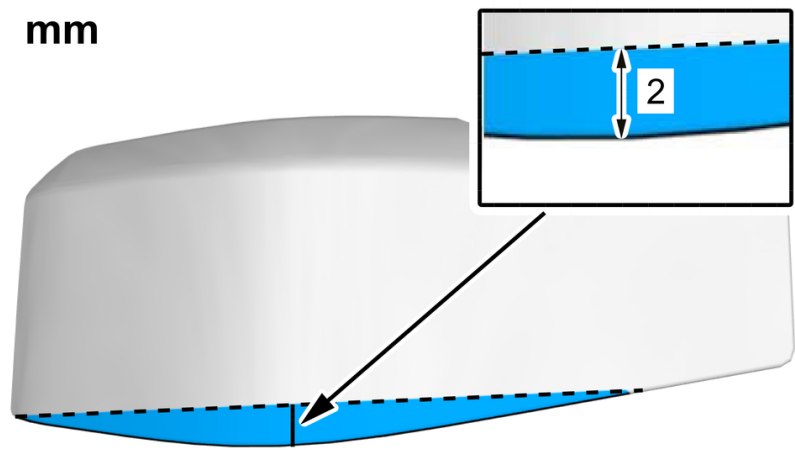

Measure and mark as illustrated.
Remove the marked part.
Even out the edge using a file.

Installation

To install, reverse the removal procedure.