

WHITE

Passenger Front Airbag Inflator Job Aid


1. Insert the long collar with the cutout into the tab on the **Fixed Bracket** side of the airbag assembly.

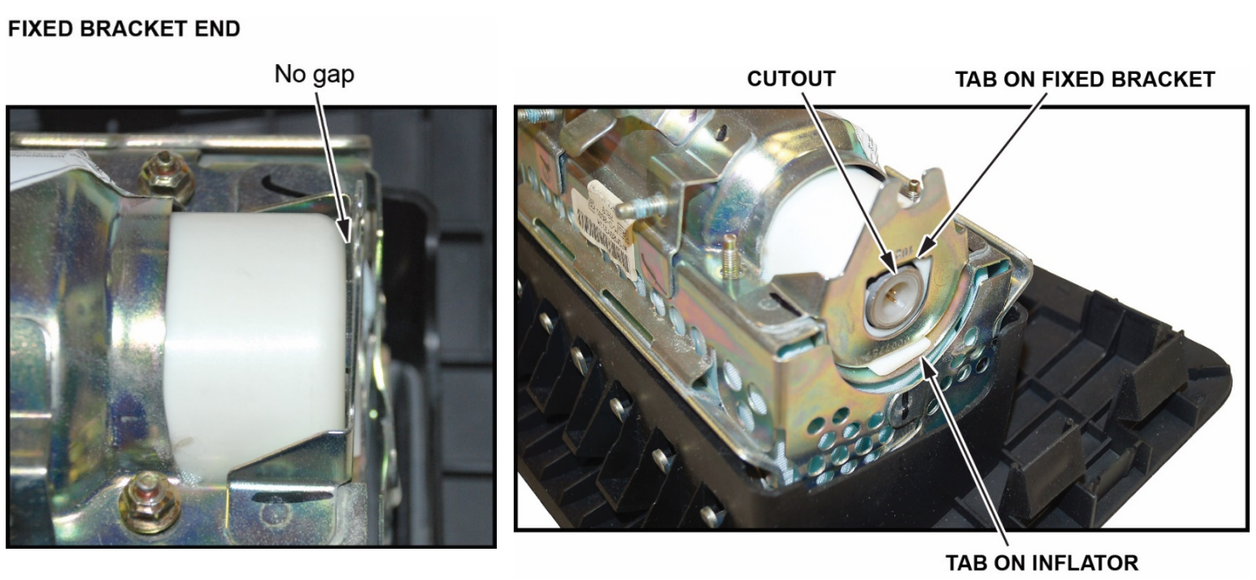

2. The **RED** dot should be visible on the **Replacement Bracket** side of the airbag assembly. Verify the bracket is sitting flat and not at an angle.

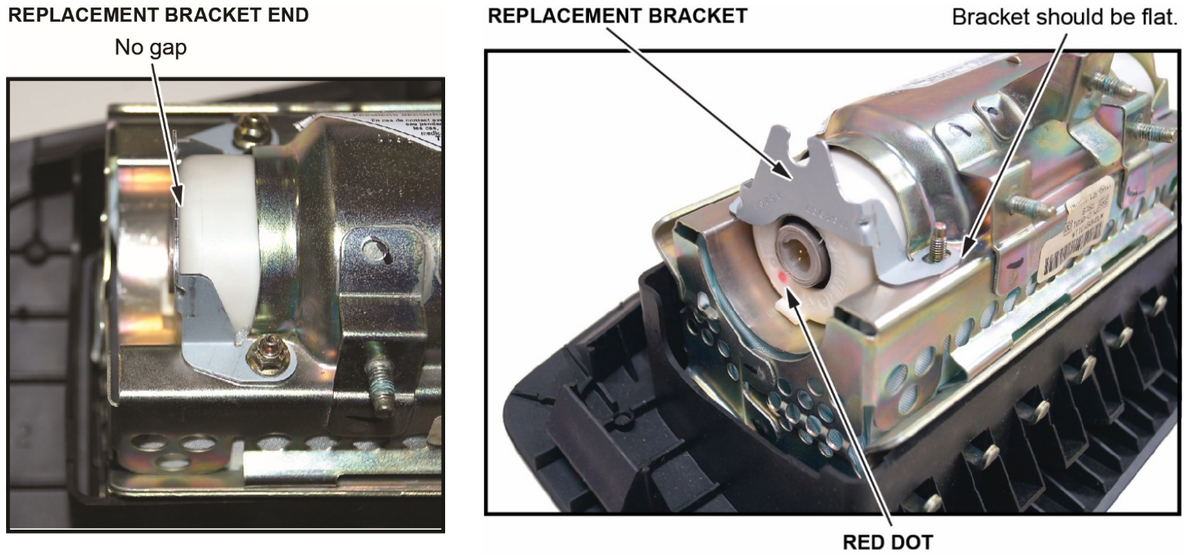


3. Always connect the red wires on the harness to the side of the inflator with the **RED** dot.

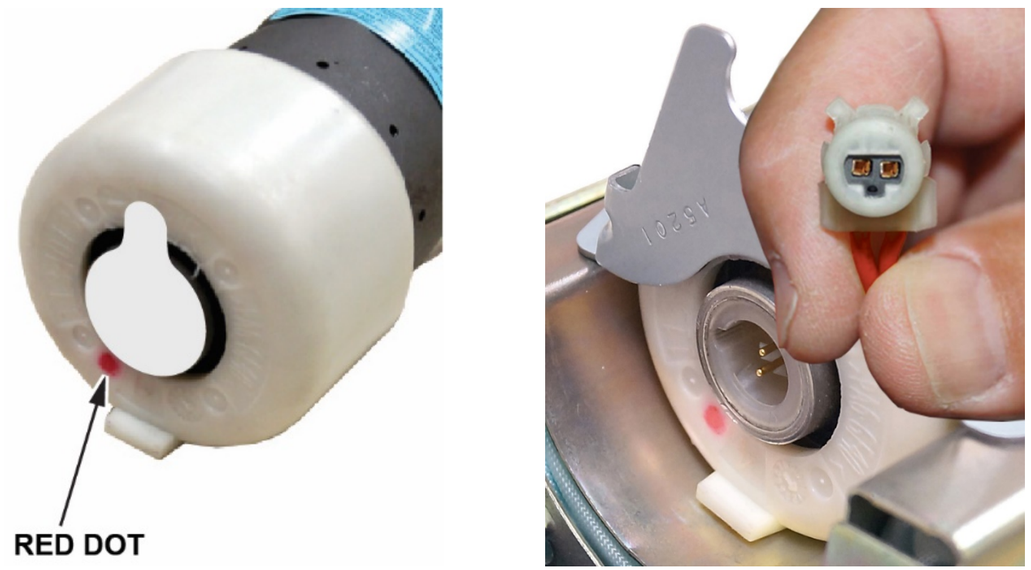


If the inflator is installed improperly and the vehicle is involved in a crash, the passenger front airbag will not deploy properly, increasing the risk of injury

When installed correctly, the metal portion of the inflator will be covered completely.

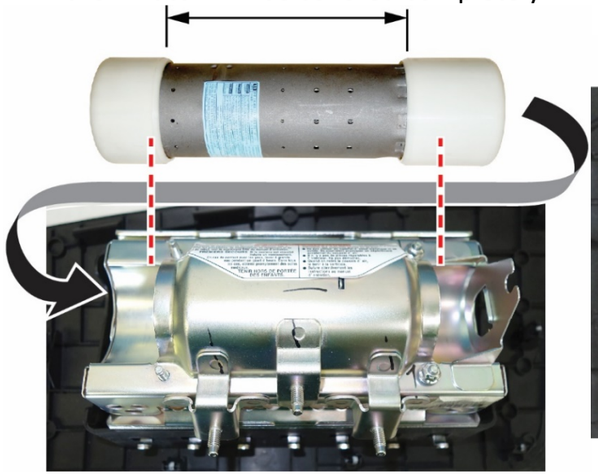

Correct Installation:

Only the plastic caps will be visible.

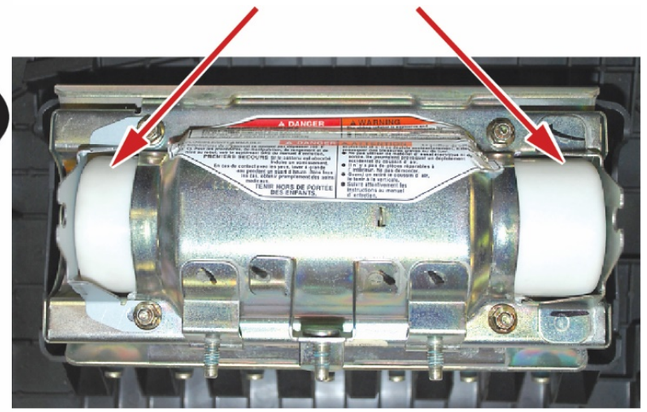



American Honda Motor Co., Inc. – All Rights Reserved

ORANGE


Passenger Front Airbag Inflator Job Aid


1. Insert the long collar with the cutout into the tab on the **Fixed Bracket** side of the airbag assembly.

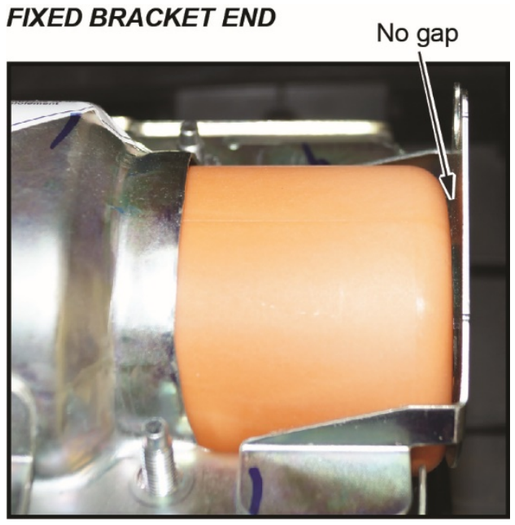

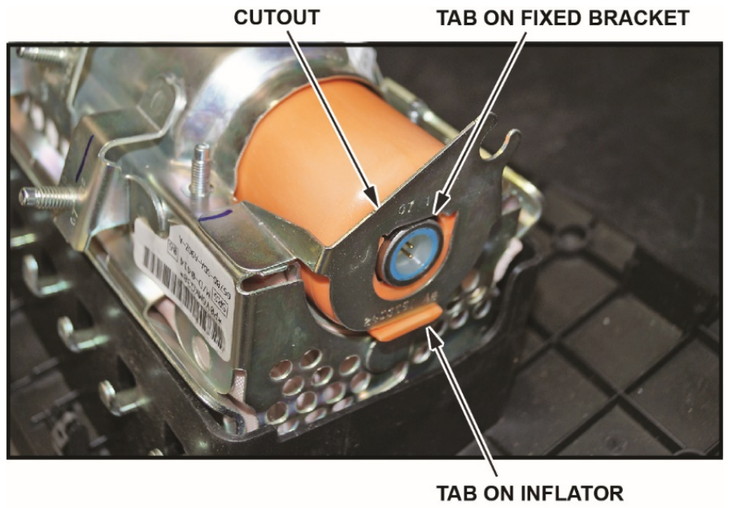


2. The **RED** dot should be visible on the **Replacement Bracket** side of the airbag assembly. Verify the bracket is sitting flat and not at an angle.

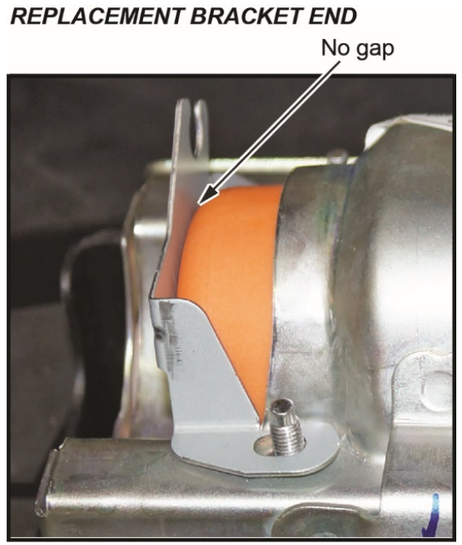

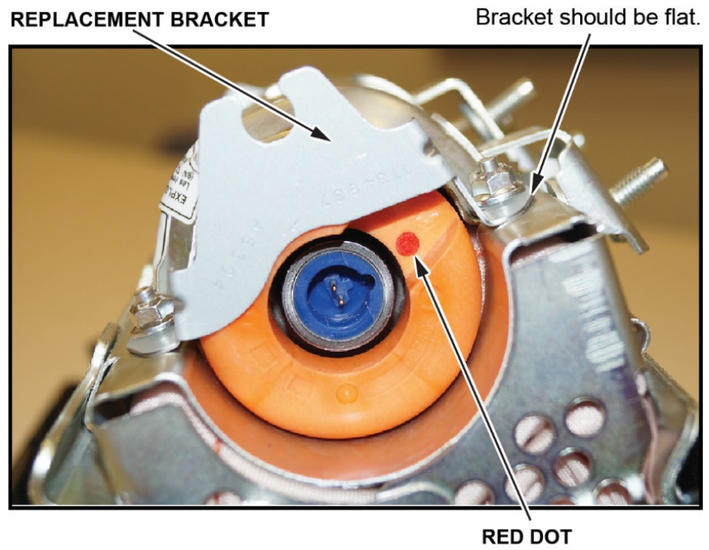


3. Always connect the red wires on the harness to the side of the inflator with the **RED** dot.



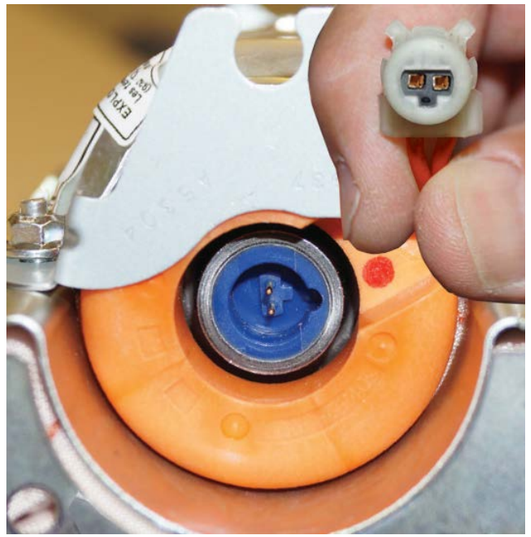


If the inflator is installed improperly and the vehicle is involved in a crash, the passenger front airbag will not deploy properly, increasing the risk of injury

When installed correctly, the metal portion of the inflator will be covered completely.

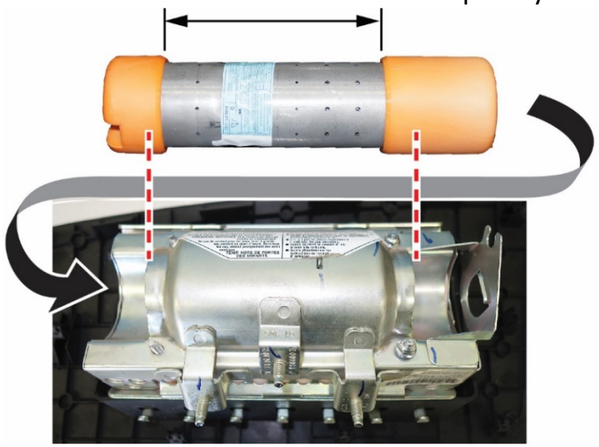

Correct Installation:

Only the plastic caps will be visible.

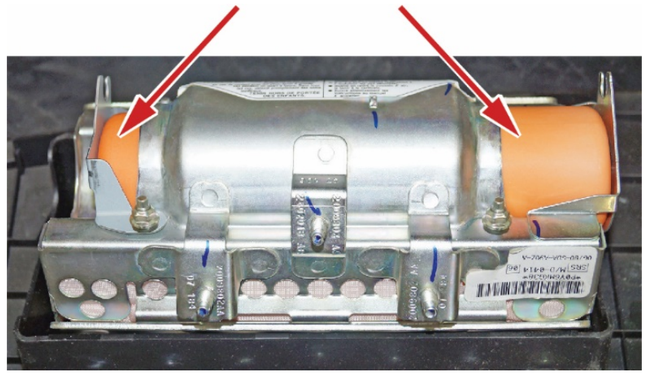



BLUE

Passenger Front Airbag Inflator Job Aid

1. Insert the short collar with the two tabs into the **Fixed Bracket** side of the airbag assembly.


FIXED BRACKET END

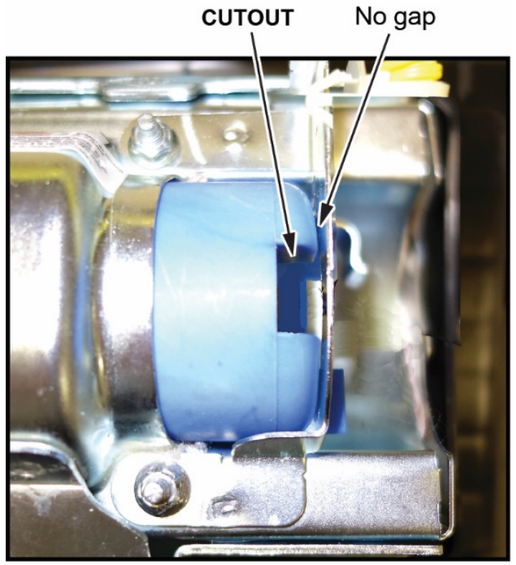


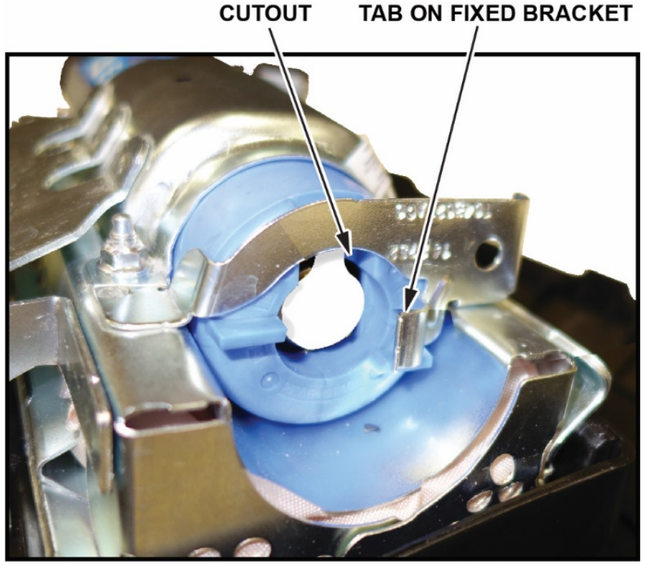


2. The single tab on the inflator should be on the **Replacement Bracket** side of the airbag assembly. Verify the bracket is sitting flat and not at an angle.

REPLACEMENT BRACKET END

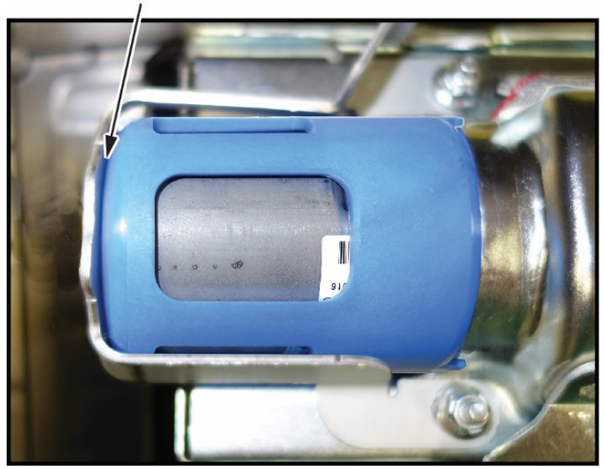

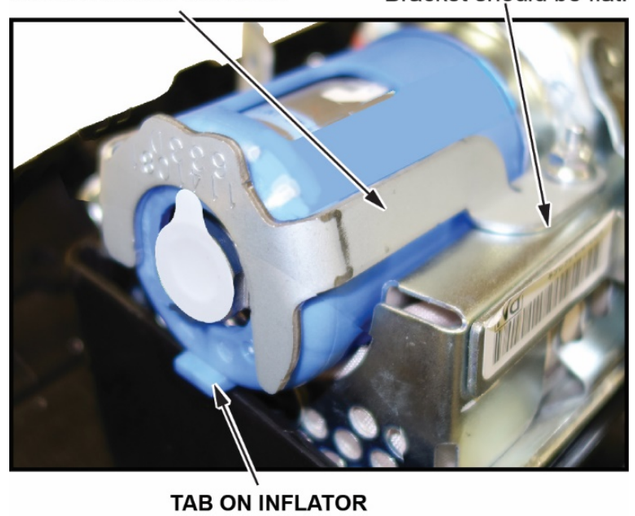


3. Always connect the red wires on the harness to the side of the inflator with the **RED** dot.

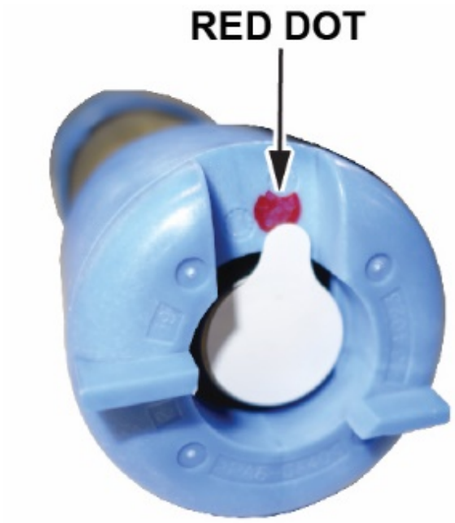




If the inflator is installed improperly and the vehicle is involved in a crash, the passenger front airbag will not deploy properly, increasing the risk of injury

When installed correctly, the metal portion of the inflator will be covered completely.

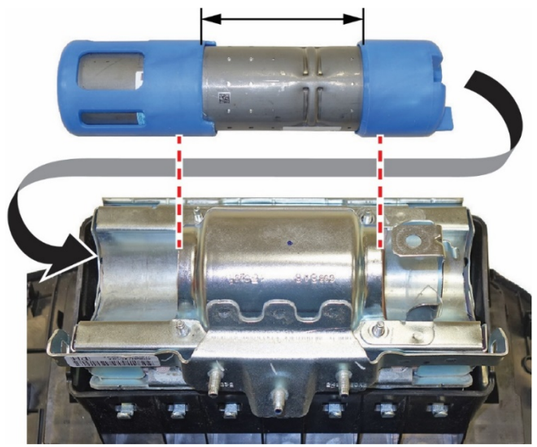

Correct Installation:


Only the plastic caps will be visible.

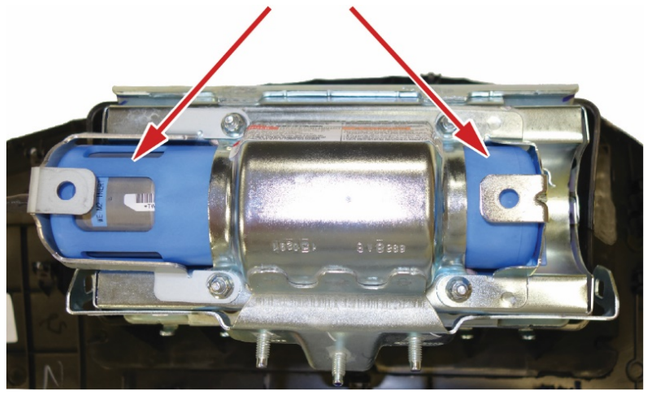


GREEN

Passenger Front Airbag Inflator Job Aid


1. Insert the short collar with the two tabs into the **Fixed Bracket** side of the airbag assembly.

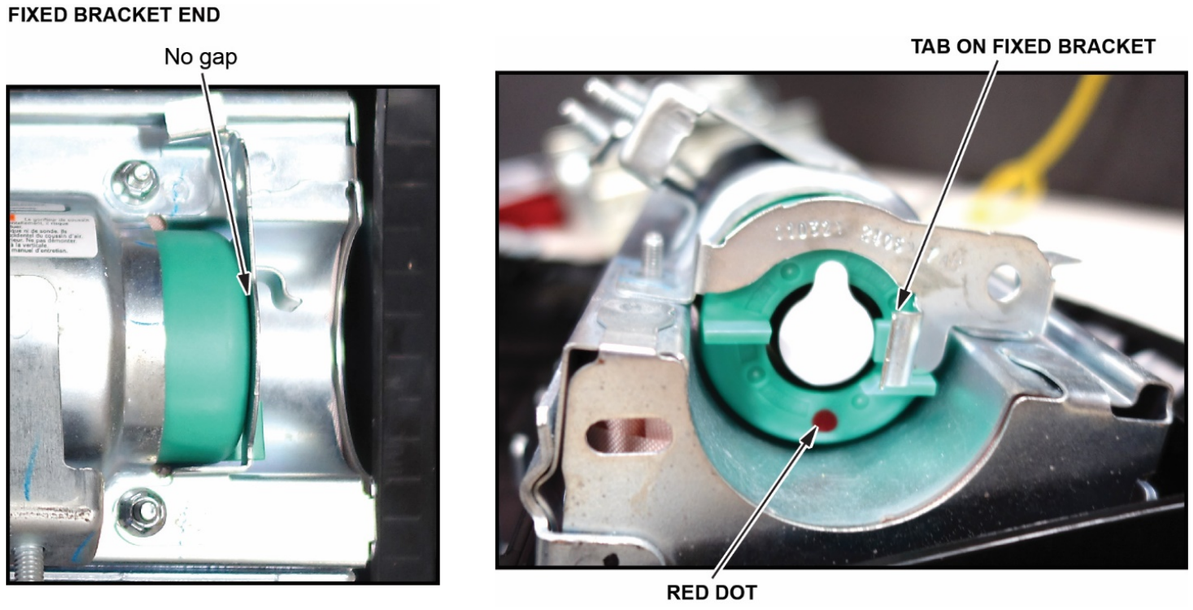

2. The single tab on the inflator should be on the **Replacement Bracket** side of the airbag assembly. Verify the bracket is sitting flat and not at an angle.

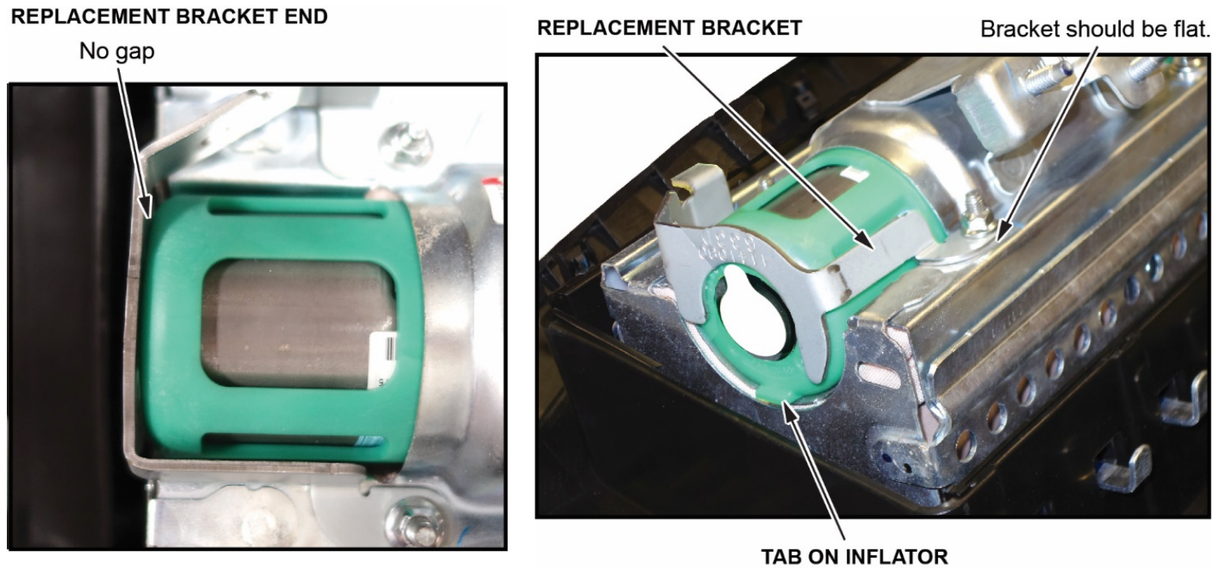


3. Always connect the red wires on the harness to the side of the inflator with the **RED** dot.

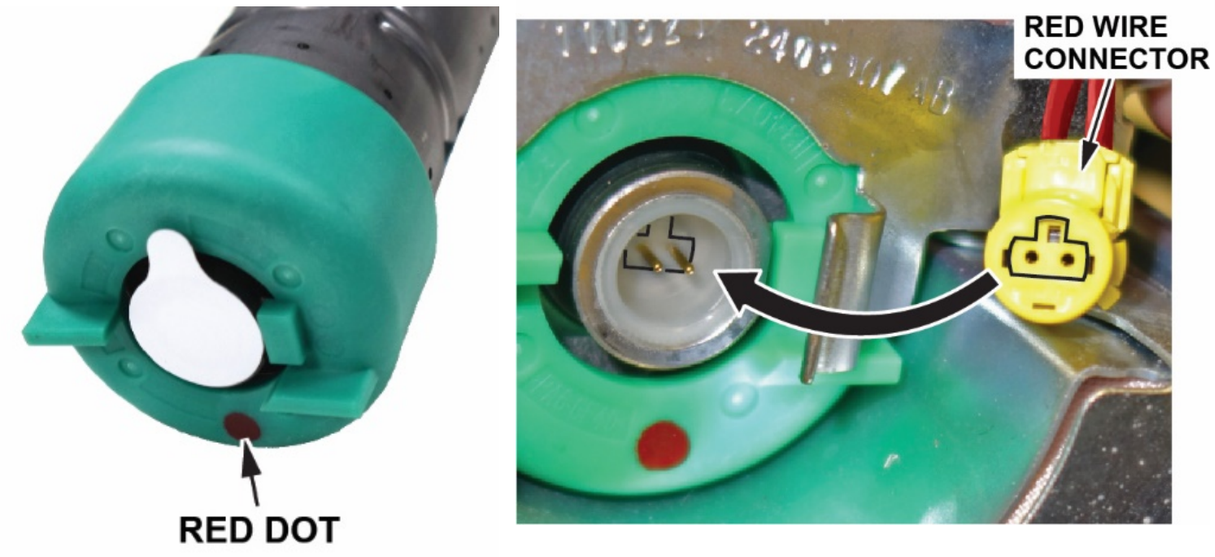

If the inflator is installed improperly and the vehicle is involved in a crash, the passenger front airbag will not deploy properly, increasing the risk of injury

When installed correctly, the metal portion of the inflator will be covered completely.

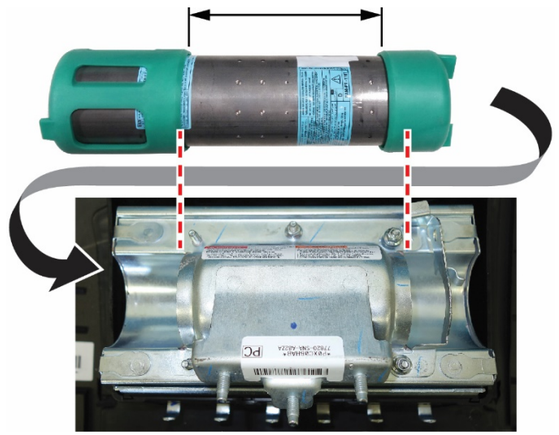

Correct Installation:

Only the plastic caps will be visible.

