



Technical Journal

TITLE:

Vibrations from wheel arch liner at high speed

REF NO: TJ 34499.1.0	ISSUING DEPARTMENT: Technical Service	CAR MARKET: United States and Canada	
PARTNER: 3 US 7510 Volvo Car USA		ISSUE DATE: 2019-02-21	STATUS DATE: 2019-02-26
FUNC GROUP: 8630	FUNC DESC: Protective shields and flaps	Page 1 of 8	

“Right first time in Time”

Attachment

File Name	File Size
TJ34499.pdf	1.3055 MB

Vehicle Type

Type	Eng	Eng Desc	Sales	Body	Gear	Steer	Model Year	Plant	Chassis range	Struc Week Range
224							2019-2099		0000001-9999999	201835-209952
225							2019-2099		0000001-9999999	201817-209952

CSC Customer Symptom Codes

Code	Description
C4	Complete vehicle/Unusual noise/While driving
V7	Complete vehicle/Vibration/When driving above 45 MPH

VST Operation Number

VST Operation Number	Description
98722-2	Vibration damper wheel arch liner

DTC Diagnostic Trouble Codes

Text

**DESCRIPTION:**

If customer complains of a rattle noise from the wheel arch/inner fender while driving above 75 mph, follow advice under “service”.

SERVICE:

Follow attached instructions.

Note: It is important to add the tape and follow the torque sequence.

VEHICLE REPORT:

Yes, please submit a Vehicle Report if the service solution described in this TJ has no effect. Use concern area “Vehicle Report” and sub concern area “Support not needed”, use function group 8630.

To view TJ attachment continue to next page. This TJ has one attachment.



Volvo Car Customer Service

TJ Instruction VCC-516622-1

Title	Front wheel arch liner	Page	1 (6)
Action	Product fix	Operation number:	98722-2

Issue	Date	Reason
1	2019-02	First issue

Affected vehicles

Model year	Model
2019	S60 (19-)
2019	V60 (19-)


Materials

Materials	Qty.	Part No.	Notes
Tape	1.0	30649094	

Removal

Note! Removal steps in this procedure may contain installation details.


Color symbols

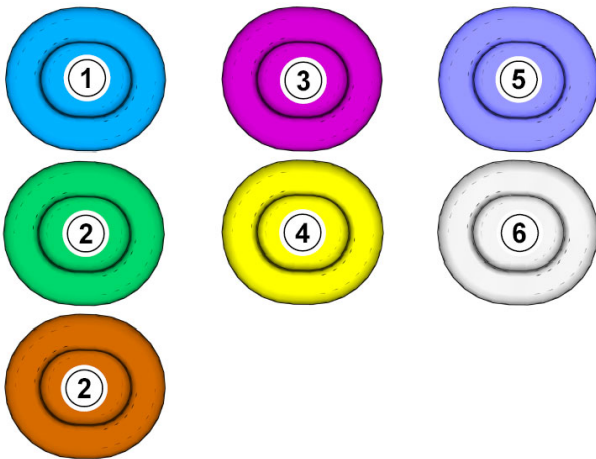


Note! This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.

- 1 . Used for focused component, the component with which you will do something.
- 2 . Used as extra colors when you need to show or differentiate additional parts.
- 3 . Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4 . Used when the component is not fully removed from the vehicle but only hung to the side.
- 5 . Used for standard tools and special tools.
- 6 . Used as background color for vehicle components.


Remove relevant side wheel , refer to:
Removal, replacement and installation
7 - Springs and wheels
77 - Wheels, tyres, hubs
770 - complete wheels

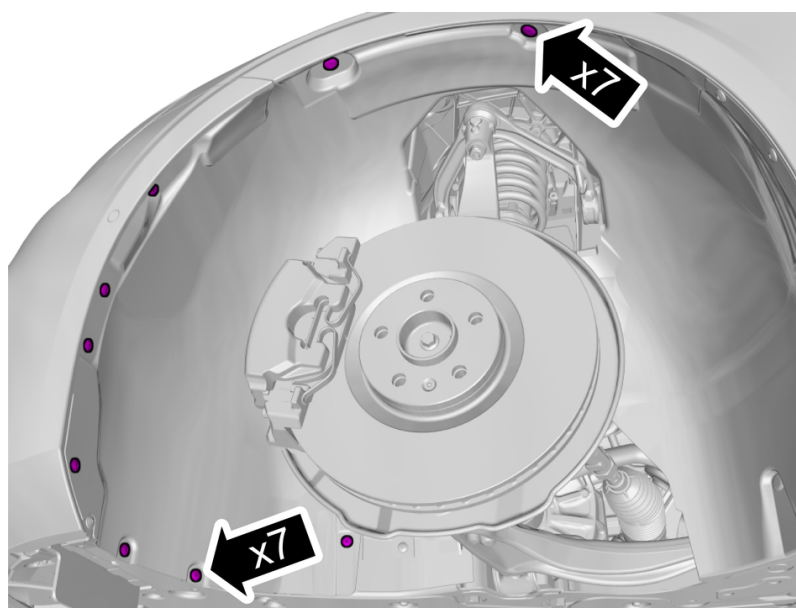


Remove the screws.
Remove the clips.

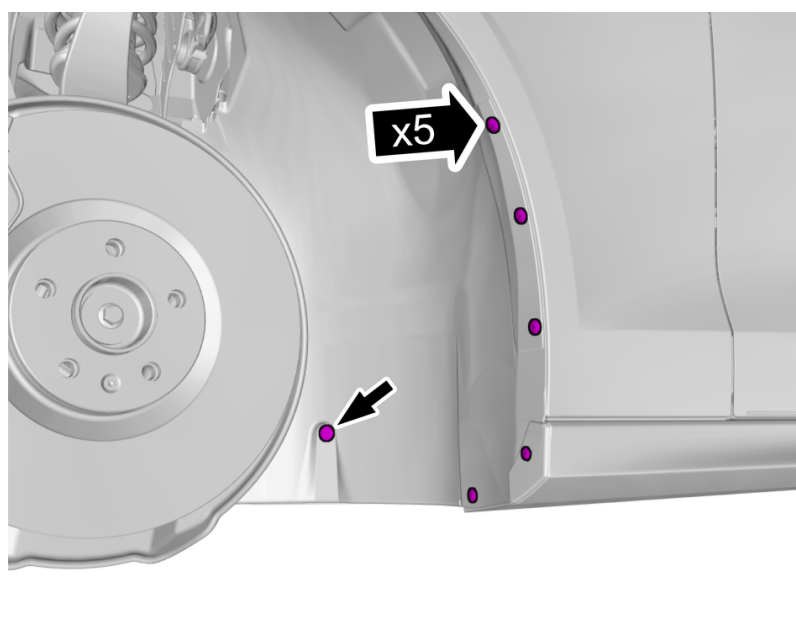


Remove the screws.
Remove the clips.

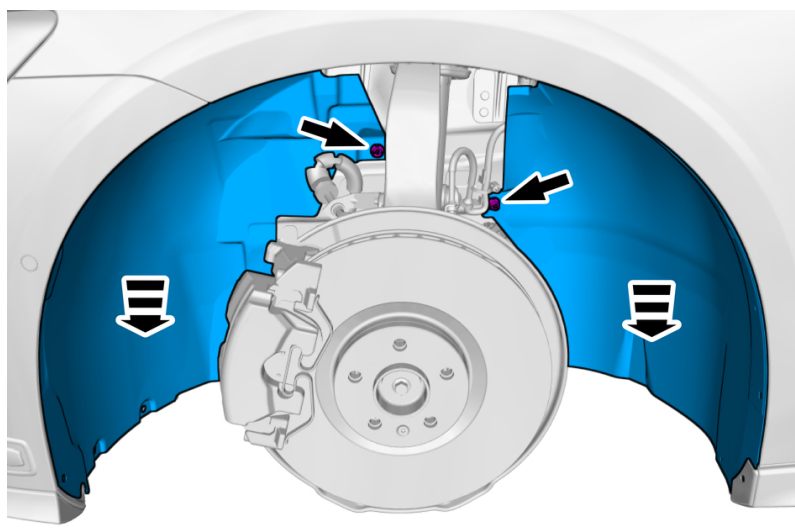


Remove the nuts.
Remove the marked part.




Use: Tape , 30649094



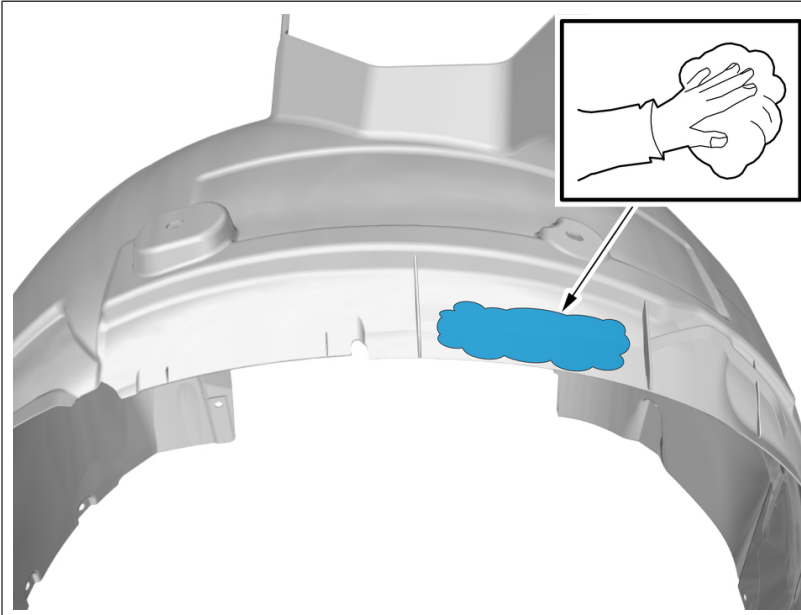


Clean the marked area.
Use Isopropanol

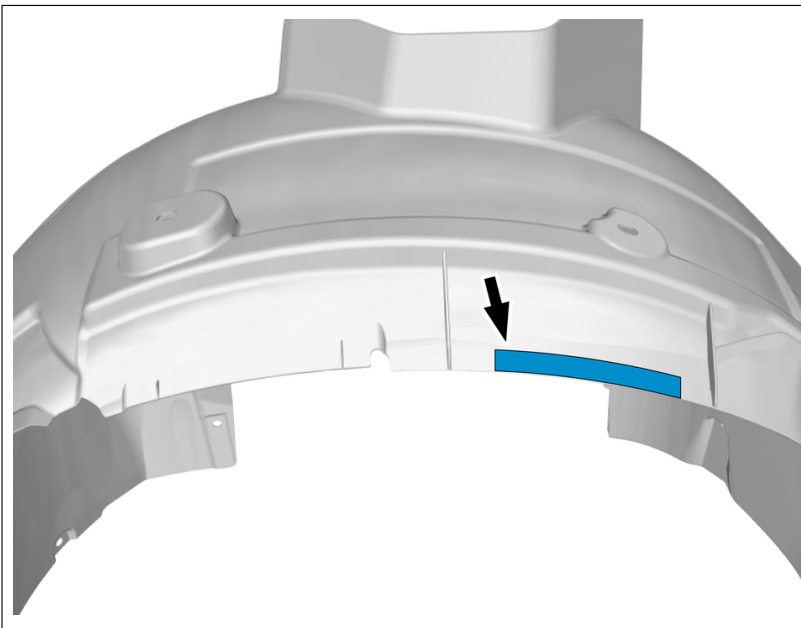

Install the marked component.

Installation

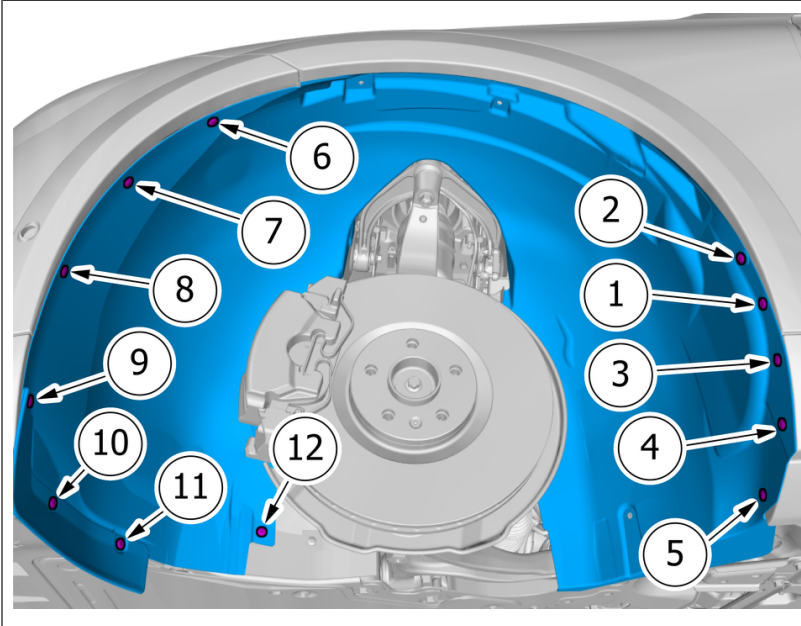

Note! Make sure to follow the sequence indicated.

Install the screws.

To install, reverse the removal procedure.