





Stabilizer Jacks – Too Short

Bulletin Type:	PIN	Publication Date:	February 2020
Bulletin #(s):	19-005	Make(s):	Starcraft
Job Code #(s):	N/A	Model(s):	Launch Outfitter
Flat Rate(s):	N/A	Model Year(s):	2019

Incident:	Jacks too short, not touching the ground when fully extended.
Affected Units:	31BHS Launch Outfitter Travel Trailer
Parts Kit:	<p>Parts required for 1 Jack:</p> <ul style="list-style-type: none"> • 2 each of part # 2002055 (Jack Spacer Bracket) • 4 each of Part #: 0216363 (3/8" Bolt) • 4 each of Part #: 0216365 (3/8" Thread cutting bolt) • 8 each of Part #: 0011774 (3/8" lock washer) • 8 each of Part #: 0216364 (3/8" nut)
Misc. Tools & Supplies:	

INSPECTION

INSTRUCTIONS

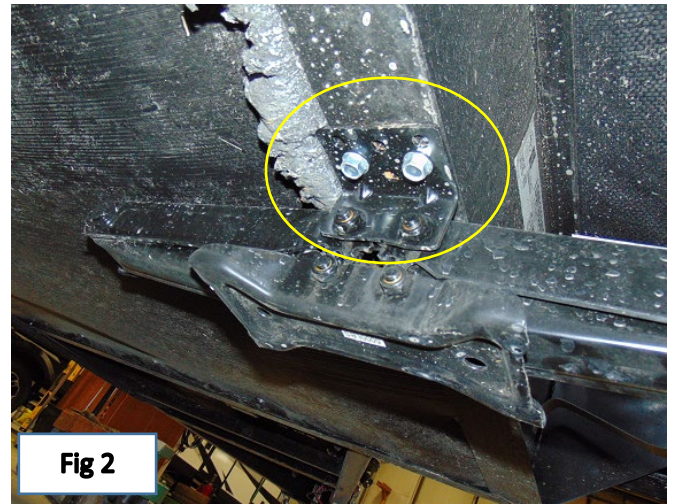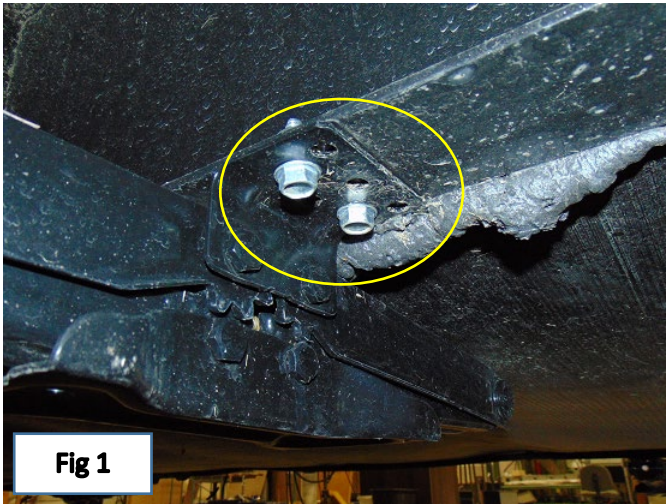



Step 1. Remove existing bolts securing the scissor jack at the front of the trailer (Fig.1) and the rear of the trailer (Fig.2). DISCARD BOLTS, NUTS.

Step 2. Secure the new Jack spacer brackets (Fig.3) in the orientation shown to the removed scissor jack. Use the 3/8" Bolts, Nuts and Lock washers provided.

The addition of the Jack spacer brackets will extend the scissor jack downward, allowing the jack plate to touch the ground.

Note: The larger holes in the Spacer Bracket are for securing the Spacer Bracket to the Jack, the smaller holes are for securing the jack to the trailer frame with the 3/8" Thread cutting bolts, nuts and lock washers. See Step 3.

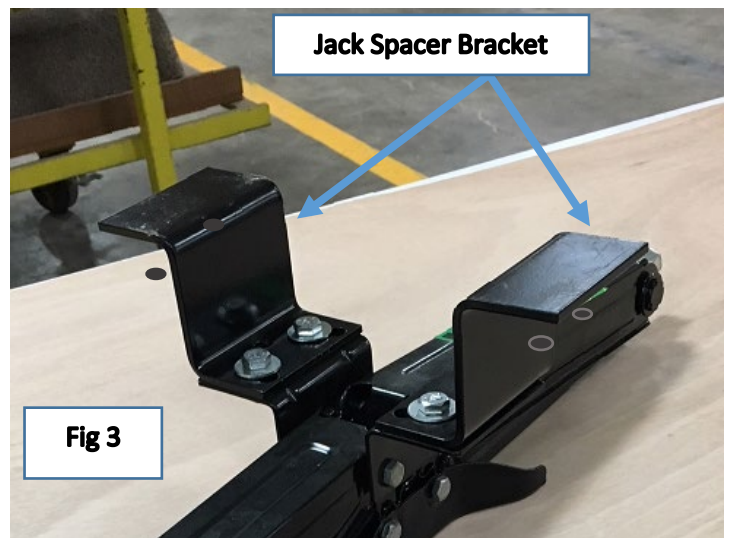

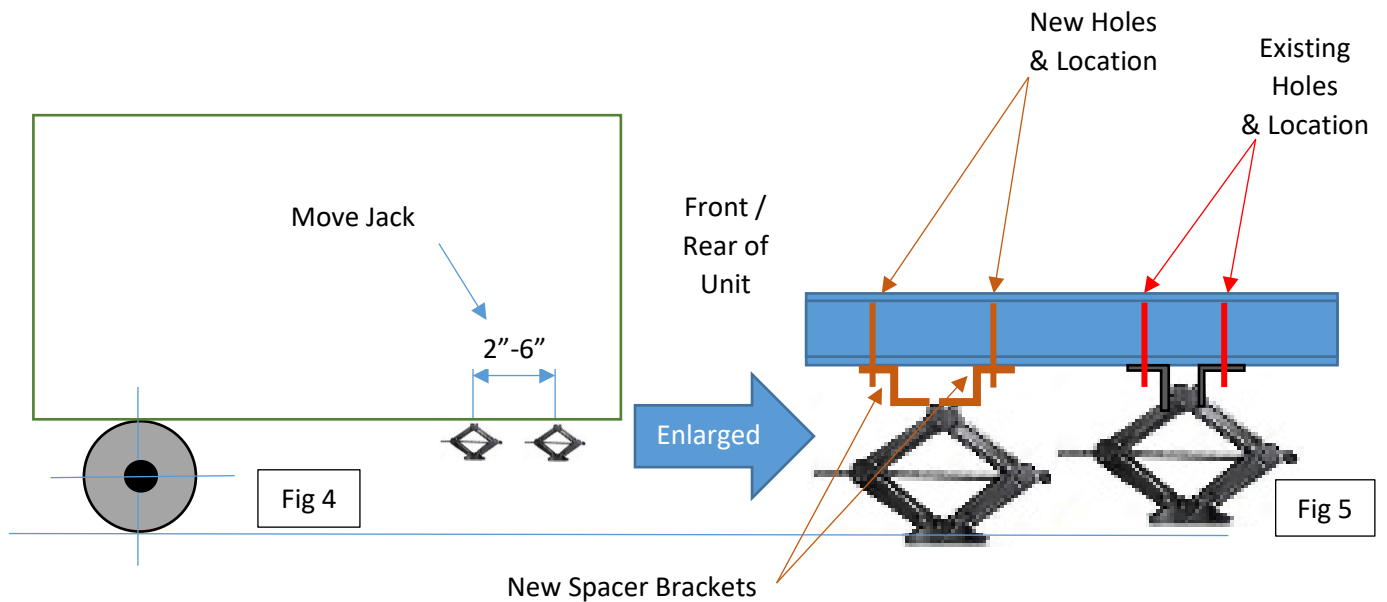

Step 3. Attach the front scissor jacks to the trailer as follows:

Locate and install the scissor jacks to the frame with the new Spacer Brackets attached (2" to 6") (toward the axles) as shown in (Fig. 4 & 5).

Secure the jacks with the 3/8" Thread cutting bolts, lock washers and nuts provided.

Step 4. Attach the rear scissor jacks to the trailer as follows:

Locate and install the scissor jacks to the frame with the new Spacer Brackets attached (2" to 6") (toward the axles) as shown in (Fig. 4 & 5).

Secure the jacks with the 3/8" Thread cutting bolts, lock washers and nuts provided.

Jayco's sole obligation under our limited warranty is to repair or replace defective materials and/or workmanship deemed our responsibility as determined by Jayco in our sole discretion. Jayco reserves the right to use new and/or remanufactured parts or materials of similar quality to complete any work, and to make parts and/or design changes as appropriate without notice to anyone. Jayco designs and/or materials changes are done without obligation to incorporate such changes in previously manufactured product. Jayco makes every reasonable effort to ensure field remedies will not adversely affect performance and/or safety of the unit. This field remedy is not intended to extend to future performance of this RV, or any of its materials, components or parts beyond the standard warranty period. The RV owner's obligation to notify Jayco, or one of its independent, authorized dealers, of a claimed defect does not modify any obligation placed on the RV owner to contact Jayco directly when attempting to pursue remedies under state or federal law. Jan. 2019.

903 South Main Street • P.O. Box 460 • Middlebury, IN 46540