

Service instruction - N438 UPS0720-3B

Service instruction

Parts Information

Tire information labels to be provided to ports free of charge.

SROs

Description	SRO	Time
Tire information label - Renew	05.10.10	0.1
Drive in/drive out	02.02.02	0.2



NOTE: Repair procedures are under constant review, and therefore times are subject to change; those quoted here must be taken as guidance only. Always refer to TOPIX to obtain the latest repair time.

Warranty Information

Warranty claims should be submitted quoting program code **N438** with the relevant option code from the table below. As option codes are used there is no requirement for you to enter SROs or parts, these are included for information only.

Program Code	Option	Description	SRO	Time
N438	A	Tire information label - Renew	05.10.10	0.1
N438	B	Tire information label - Renew	05.10.10	0.1
		Drive in/drive out	02.02.02	0.2

Warranty claims should be submitted in accordance with the current JLR Global Warranty Compliance and Procedures Manual, and its amendments, unless stated otherwise in this bulletin.



NOTE: The option that contains the drive in/drive out allowance may only be claimed when the vehicle has been brought back into the workshop for this action alone to be undertaken.

Service Instruction



NOTE: Some variation in the illustration may occur, but the essential information is always correct.


1. Open the front left door.



NOTE: The new adhesive tire information label must be installed in the same position as the previous adhesive tire information label.

Remove and discard the adhesive tire information label from the lower B-pillar panel.

- Clean the surrounding area.
- Remove the backing from the new adhesive tire information label.
- Install the new adhesive tire information label to the lower B-pillar panel.

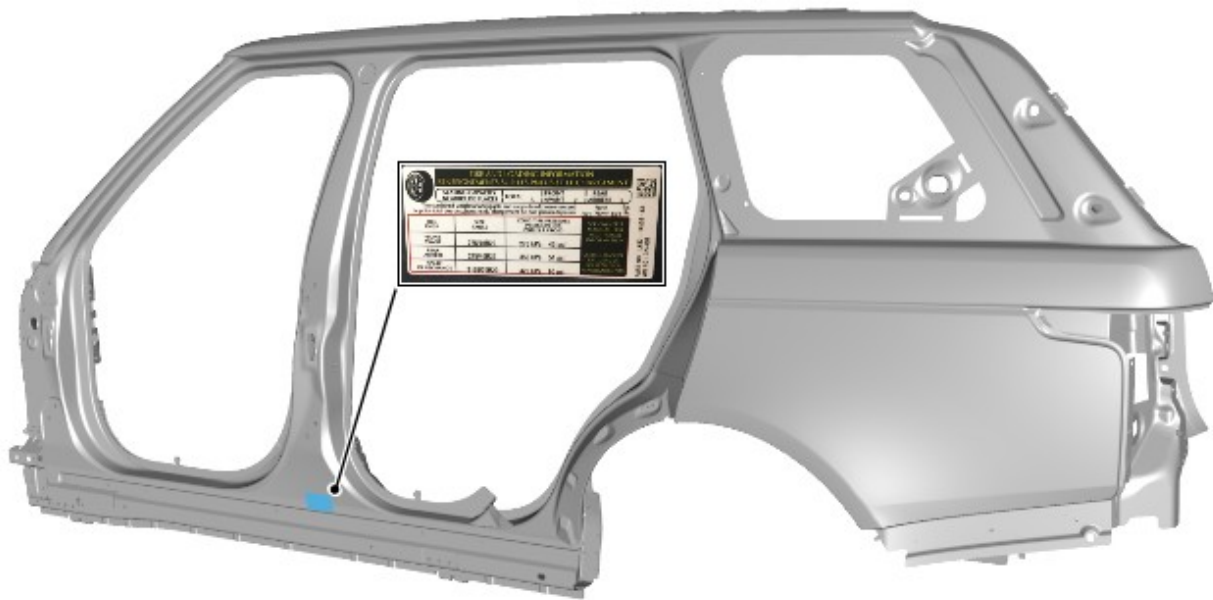

E260925

3. Close the front left door.