



INSTRUCTION TO SERVICE

ITS: 58951

SECTION:	304 Paint & Decals
WRITTEN BY:	Troy Stutsky
SUBJECT:	Install Proposition 65 Labels / Non - Diesel

ITS58951

THIS ITS DOCUMENT SHOULD BE RETAINED AND REFERED TO FOR FUTURE MAINTENANCE UNTIL THE NEW FLYER PARTS AND/OR SERVICE MANUAL IS UPDATED TO REFLECT WORK DONE AS A RESULT OF THIS DOCUMENT. ENSURE THAT THIS DOCUMENT IS AVAILABLE FOR PARTS AND MAINTENANCE STAFF GOING FORWARD.

THIS DOCUMENT AND THE CONTENTS DISCUSSED HEREIN ARE THE CONFIDENTIAL AND PROPRIETARY INFORMATION OF NEW FLYER INDUSTRIES CANADA ULC AND NEW FLYER OF AMERICA INC. AND ARE DISCLOSED BY NEW FLYER IN CONFIDENCE. THIS DOCUMENT AND THE CONTENTS HEREIN ARE NOT TO BE DISCLOSED BY THE INTENDED RECIPIENT WITHOUT THE PRIOR WRITTEN AUTHORIZATION OF NEW FLYER. ANY UNAUTHOIZED DISCLOSURE, REPRODUCTION OR OTHER DISTRIBUTION OF THIS DOCUMENT OR INFORMATION IS STRICTLY PROHIBITED AND MAY RESULT IN ACTION BEING TAKEN AGAINST THE PARTY MAKING THE UNAUTHORIZED DISCLOSURE. THIS DOCUMENT AND ALL COPIES HEREOF MUST BE RETURNED TO NEW FLYER UPON REQUEST.



PROCEDURE:

1. Turn the main battery disconnect switch to the "OFF" position.
2. Clean the areas where the warning labels will be installed as shown in Figure 1 with a 50/50 mixture of isopropyl alcohol and water and a lint free cloth. Allow to dry.
3. Install the two warning labels (NF PN 831435) in the locations shown in Figure 1.

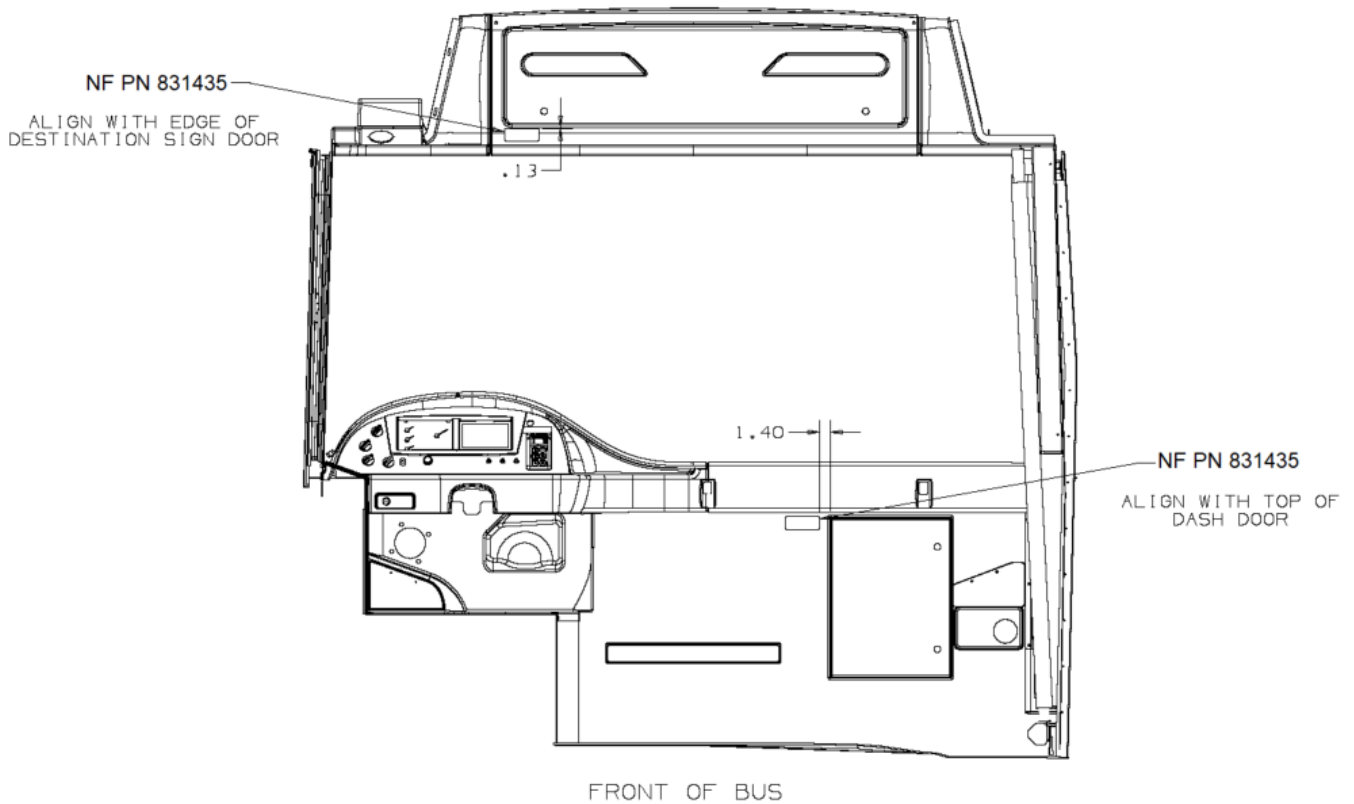


Figure 1 – Warning Label Locations

4. Remove all tools and debris and return the bus to service condition.
5. Turn the main battery disconnect switch to the "ON" position.



NEW FLYER

LABOUR ESTIMATE

	Operation	People	Hours	Labor Time
1	Install Proposition 65 Labels / Non – Diesel	1	0.25	0.25

PARTS REQUIRED

Item	Part Number	Description	Qty. per Coach	Units	Notes
1	831435	DECAL-P65 WARNING NON-DIESEL	2	EA	