



Ferrari North America Technical Information

Date: January 2021
Bulletin #: 2658
Campaign #:
Supersedes:
Section: 9

Model: **SF90 STRADALE**

Subject: Installation of front and rear license plate holders


Please find enclosed the instructions for fitting the front and rear license plates on the aforementioned model.

The vehicle is shipped from the **factory** with a specific kit for the destination market for installing the front and rear license plate holders.

The market-specific kit consists of:

- Complete front license plate holder;
- Rear license plate holder;
- Bag containing fastener hardware for installing license plate holders.

The front (Fig. 1 and 3) and rear (Fig. 2) license plates differ depending on the market, but must always be installed in the same position: precisely in the center of the front or rear bumper.

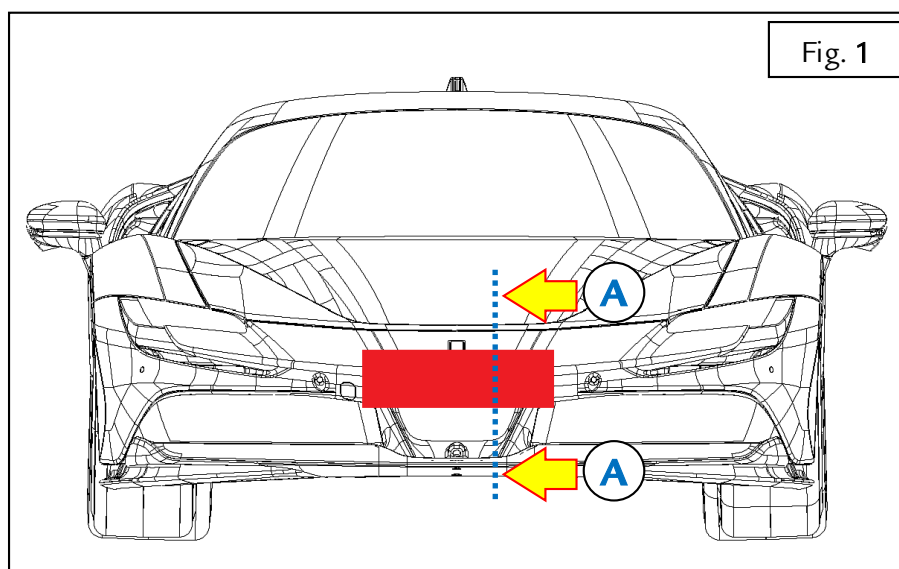

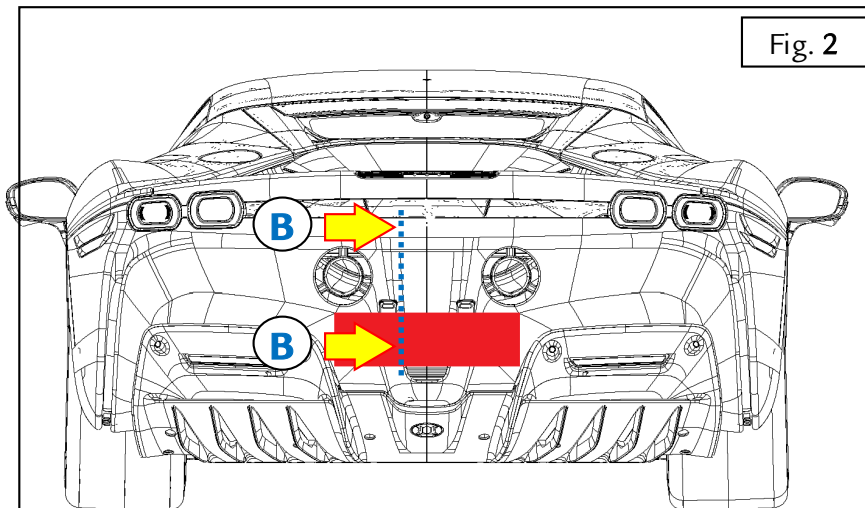


Fig. 2

Procedure

FRONT LICENSE PLATE HOLDER (cross section A – Fig. 1)

- On a letter sheet of paper (8.5"x 11") Print the attachment included with this document, which contains the template. Ensure that the option 'Scale to paper size' is set to "No Scaling" (DO NOT RESIZE THE PAGE). The attachment is originally an A4 format document.
- After printing out the template, use a ruler to check that the dimension indicated is **139 mm**. If the measurement is correct, cut out the template.
- Align the template correctly, with the Ferrari badge centered in the notch indicated by the dotted line (A) in Fig. 3.
- Ensure that the template is positioned correctly on the front bumper, and that all the conditions indicated above are met.


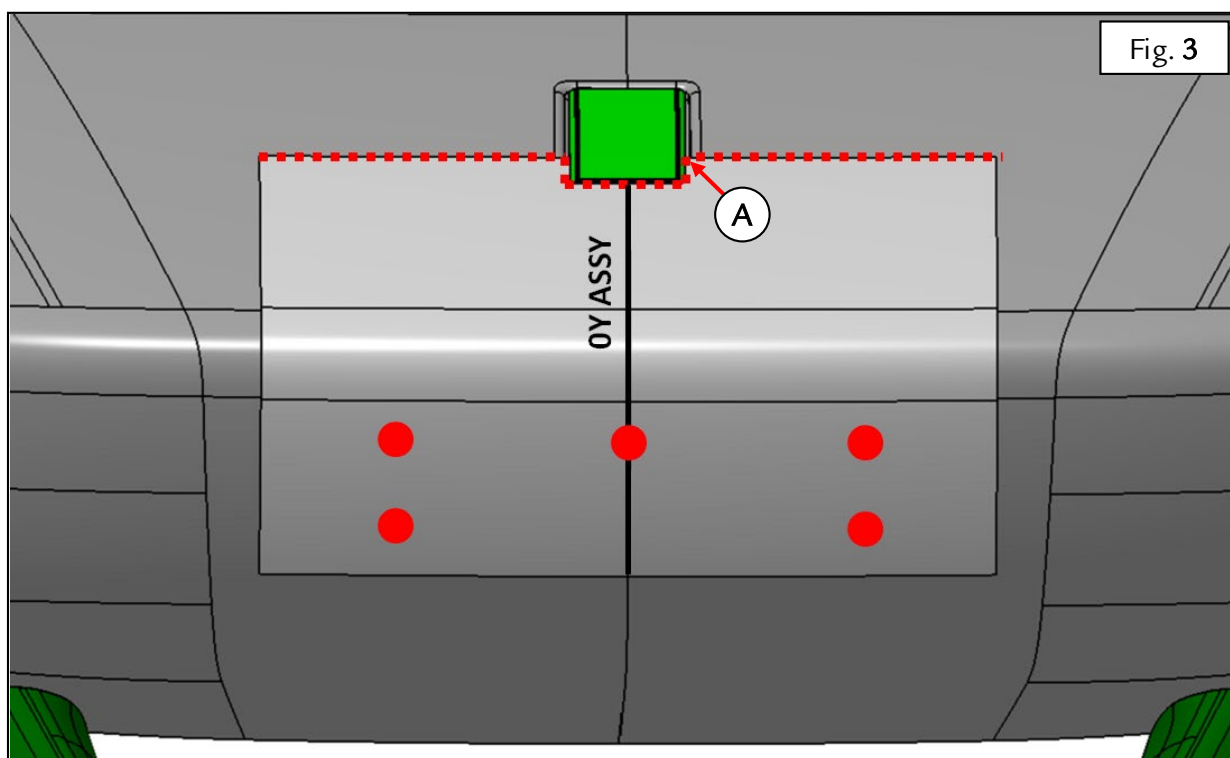


Fig. 3



Ferrari North America


- Using a drill with a suitable bit, drill **5** holes in the positions indicated on the template as shown in Fig. 4.

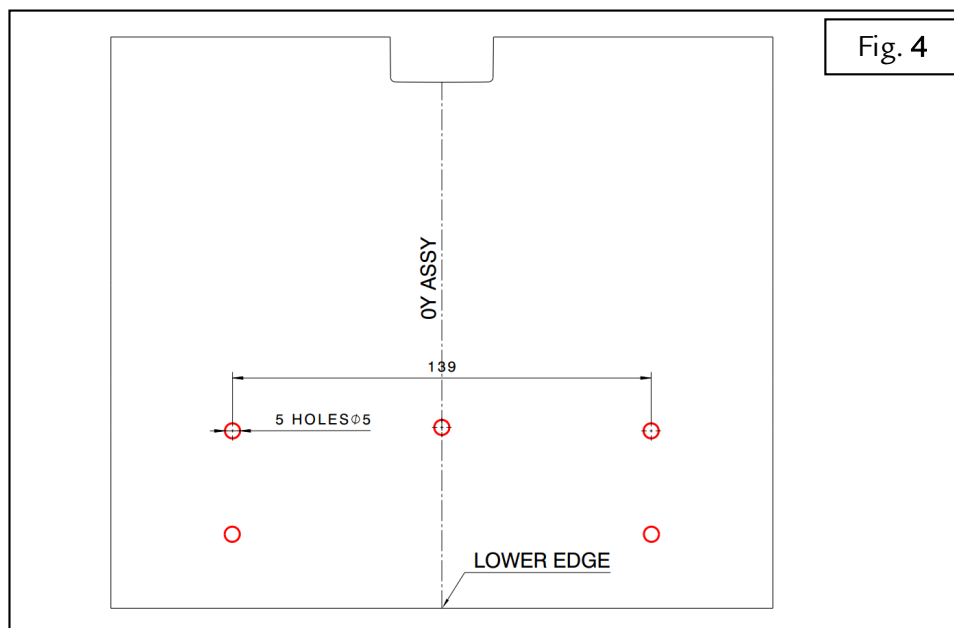

- IMPORTANT -

To help ensure the safety of the operator during the procedure described above, use all personal protective equipment (PPE) necessary for this type of work: safety goggles, respirator mask and work gloves.


- Place the complete front license plate holder (**B**) over the holes drilled previously – Fig. 5.
- Fasten the license plate holder to the bumper with five split-type rivets (**C**), included in the kit – Fig. 5.

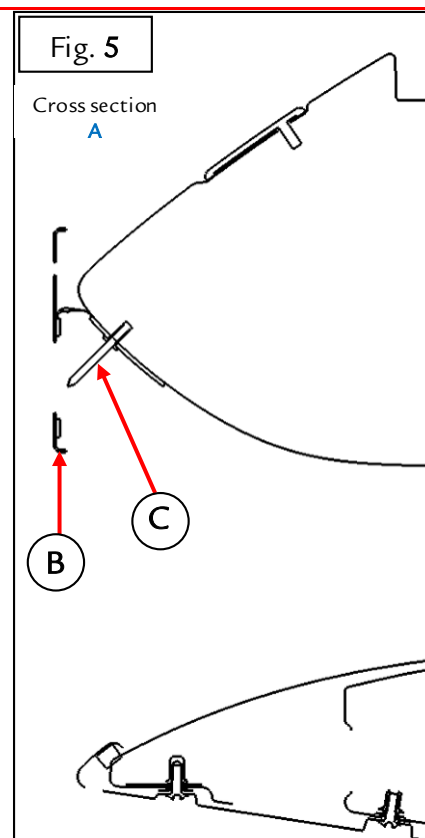




REAR LICENSE PLATE HOLDER (cross section B – Fig. 2)

- When fitting the complete rear license plate holder:
 - the license plate holder must be centered perfectly with the centerline of the rear bumper;
 - the bottom of the license plate holder must be perfectly parallel with the ground;
 - the distance Z must be 19.5mm (Fig.6).

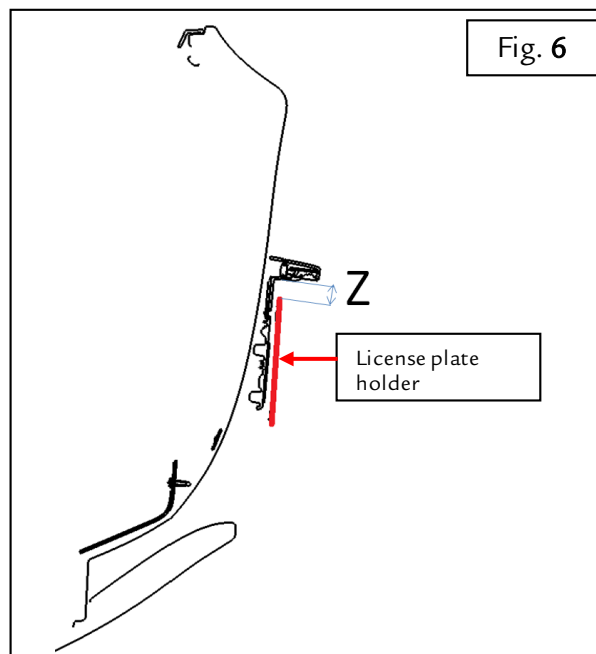

- Place the license plate holder as shown, aligning horizontally and maintaining a distance Z of 19.5 mm at the top – Fig.7

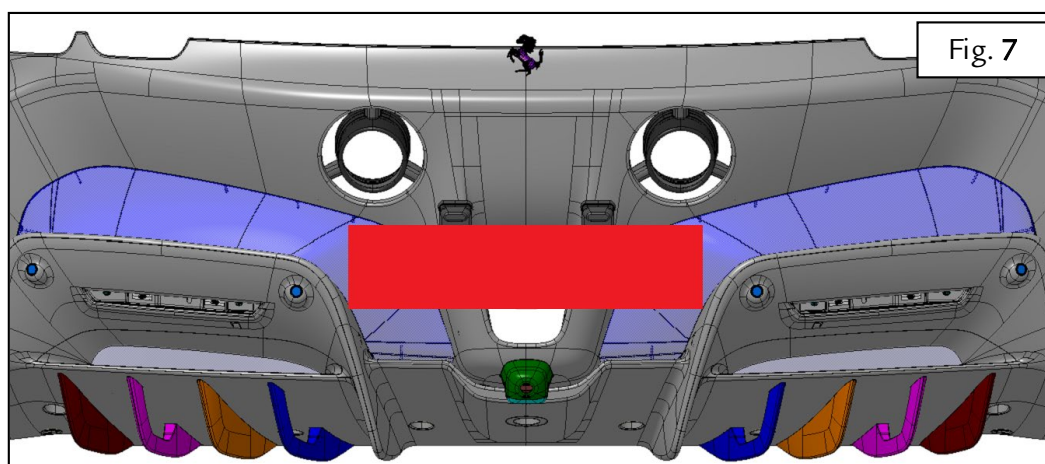



Ferrari North America

- Place the rear license plate over the holes in the rear bumper, ensuring that the conditions described previously are met. Fasten the rear license plate holder with the screws included in the kit.

Thank you for your cooperation.

