



Highland
RIDGE RV

STARCRAFT

Refrigerator not wired for 12Volt (DC)

Bulletin Type:	Technical Service Bulletin TSB	Publication Date:	March 9, 2021
Bulletin #:	21-002	Make(s):	Entegra Class B
Job Code(s):	9803565	Model(s):	Ethos
Flat Rate(s):	.50 Hour	Model Year(s):	2021

Incident:	Refrigerator wiring for 12 Volt omitted during manufacturing.
Affected Units:	M1RT8050 - 8075
Parts Kit:	NA
	(2) Wago connectors - push to connect Screw gun with square head bit Wire cutter Wire stripper

INSTRUCTIONS

1. Remove the (2) screws from the bracket(s) that secure the refrigerator to the floor. Set the screws aside for re-use.




2. Pull the refrigerator from the cabinet.

NOTE: When moving the refrigerator out, hold on the sides of the refrigerator. Avoid adding pressure or stress to trims and molding on the refrigerator.


CAUTION: Take care not to damage the linoleum.



3. Unplug the refrigerator.
4. Locate the green and white wires. Cut both wires. Strip back the wires approximately 3/8".

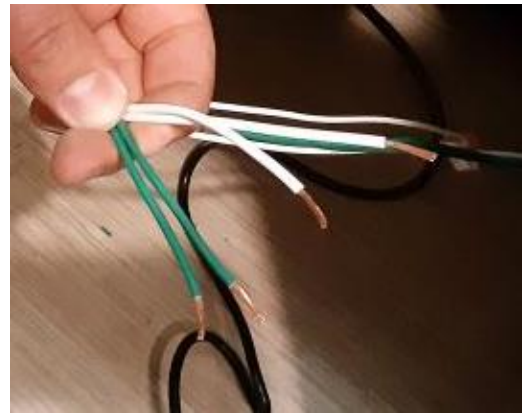

5. Using the 12v refrigerator connector and a wago connector, connect the (2) green wires to the red wire (2) white wires with the black.

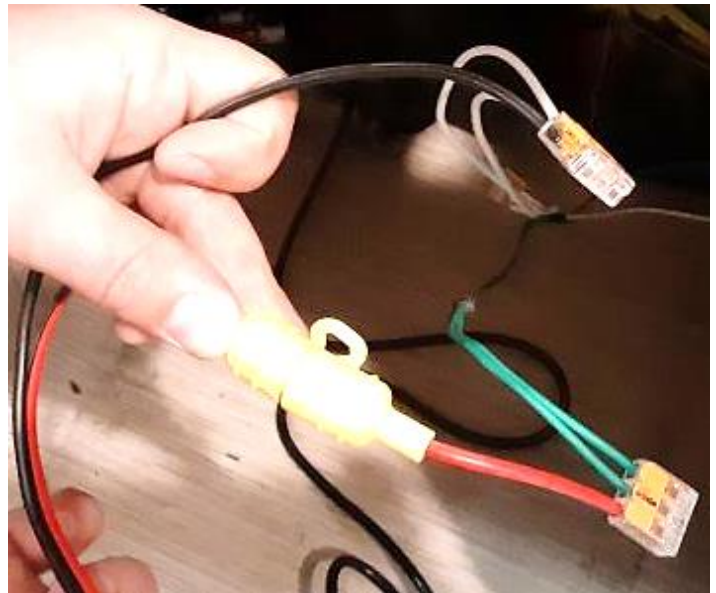

6. Plug the 12v connector into the port in the lower left (facing the back) of the refrigerator.
7. Plug the refrigerator back in.

NOTE: When moving the refrigerator in, hold on the sides of the refrigerator. Avoid adding pressure or stress to trims and molding on the refrigerator.

CAUTION: Take care not to damage the linoleum.



8. Push the refrigerator back into the cabinet. Re-install the screws into the floor brackets.

NOTE: If you have trouble getting the refrigerator back into position, you may need to proceed with the following additional steps. If the refrigerator went back into place easily and you have secured it to the floor, the repair is complete.

9. Remove the ABS pipe cover on the side of the cabinet (between the cabinet and the seat base). You will need to remove (4) square head screws. This will expose the pipe and give you access behind the refrigerator.
10. Have one person push the refrigerator back into place while a second person gently shifts the pipe allowing the refrigerator to be pushed back into place.
11. When back in place, re-install the screws to secure the refrigerator back into place.
12. Re-install the pipe cover.



Jayco's sole obligation under our limited warranty is to repair or replace defective materials and/or workmanship deemed our responsibility as determined by Jayco in our sole discretion. Jayco reserves the right to use new and/or remanufactured parts or materials of similar quality to complete any work, and to make parts and/or design changes as appropriate without notice to anyone. Jayco designs and/or materials changes are done without obligation to incorporate such changes in previously manufactured product. Jayco makes every reasonable effort to ensure field remedies will not adversely affect performance and/or safety of the unit. This field remedy is not intended to extend to future performance of this RV, or any of its materials, components or parts beyond the standard warranty period. The RV owner's obligation to notify Jayco, or one of its independent, authorized dealers, of a claimed defect does not modify any obligation placed on the RV owner to contact Jayco directly when attempting to pursue remedies under state or federal law. Jan. 2019.

903 South Main Street • P.O. Box 460 • Middlebury, IN 46540