

REFERENCE:	Nova Bus Manuals
SECTION:	19: DRIVER'S ACCESSORIES
RS N°:	MQR 7621-2294
EFFECTIVE IN PROD.:	

APPLICATION DEADLINE: 2022AL27
CLAIM REFERENCE NUMBER: WB-5083

SUBJECT:	Installation of missing washers on the cover shade Dash
JUSTIFICATION:	As per the internal campaign 21-054-IC-103

LEVEL	DESCRIPTION	DIRECT CHARGES		TIME
		LABOUR	MATERIAL	
1	Installation of 6 missing washers	Novabus	Novabus	0.25 hr
2	—	—	—	—

MATERIAL

QTY	PART N°	REV.	DESCRIPTION	REPLACES PART N°
LEVEL 1				
6	N80261	—	WASHER M5 BLACK OXYDE ROHS	—
LEVEL 2				
—	—	—	—	—
SHOP SUPPLY				
—	—	—	—	—

Materials will be available within 08 days once your order has been placed. To order, please contact Prevost Parts by phone at 1-800-771-6682, by fax at 1-888-668-2555 or by email at prevostparts.commandes@volvo.com. Specify document number, quantity of parts required and shipping address. Use the supplier Purosil to order the parts

DISPOSAL OF PARTS

REMOVED PARTS ARE:	DISCARDED*	RETAINED	* Dispose of the unused parts and the defective parts in accordance with local environmental standards in effect.
	—	—	

REVISION HISTORY

REV.	DATE	CHANGE DESCRIPTION	WRITTEN BY
NR	2021AL28	Initial release	Rajendra N M

APPROVED BY:

Jean-Nicolas Fournier

Digitally signed by Jean-Nicolas Fournier
DN: cn=Jean-Nicolas Fournier, o=Nova Bus, email=jean-nicolas.fournier@volvo.com, c=CA
Date: 2021.05.07 08:19:52 -04'00'

PAGE 1 OF 4

CLIENT	ORDER	ROAD NUMBER		VIN (2NVY/4RKY...)		QTY
		FROM	TO	FROM	TO	
San Juan Puerto Rico	LD32	2021-01	2021-10	L82J5L9777751	L82J6L9777760	10

**WARNING**

Follow your internal safety procedures.

PROCEDURE

- 1.1. Park the vehicle on an even surface with transmission in neutral (N).
- 1.2. Turn the ignition switch to OFF position and engage the parking brake.
- 1.3. Set the master control switch in the STOP position (see figure 1).

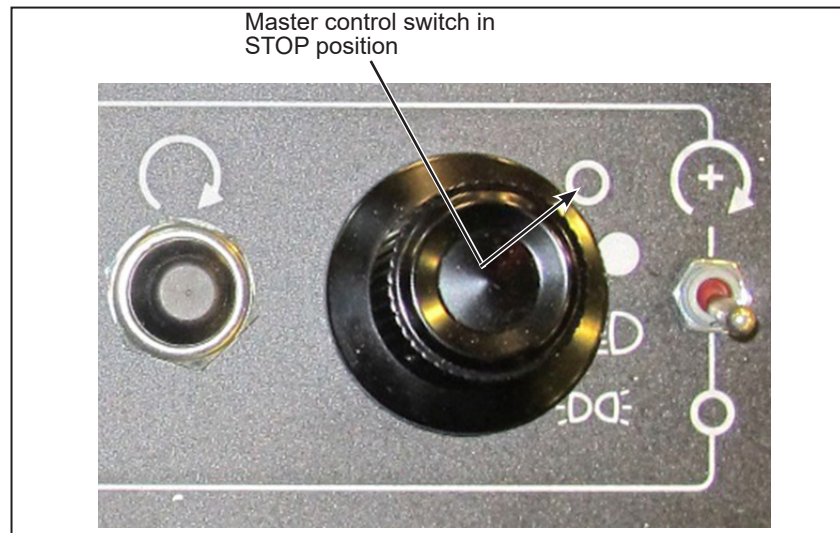


Figure 1 - Master Control Switch in STOP Position

- 1.4. Set the battery disconnect switch in the battery compartment to the OFF position (see figure 2).

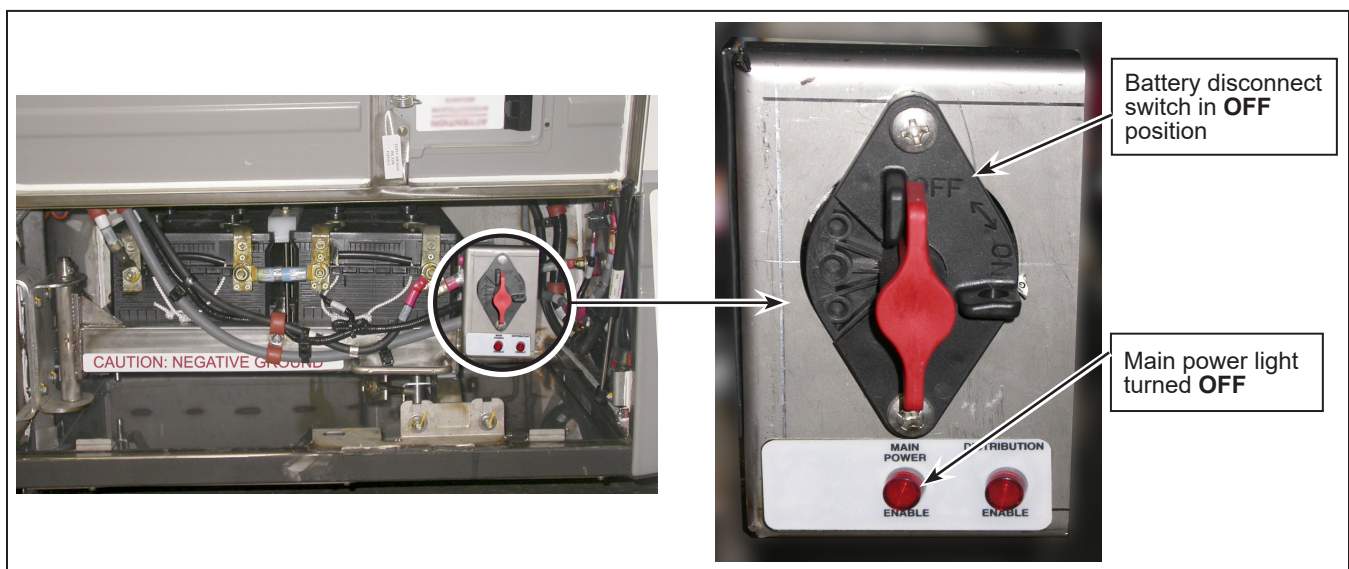


Figure 2 - View of Battery Disconnect Switch

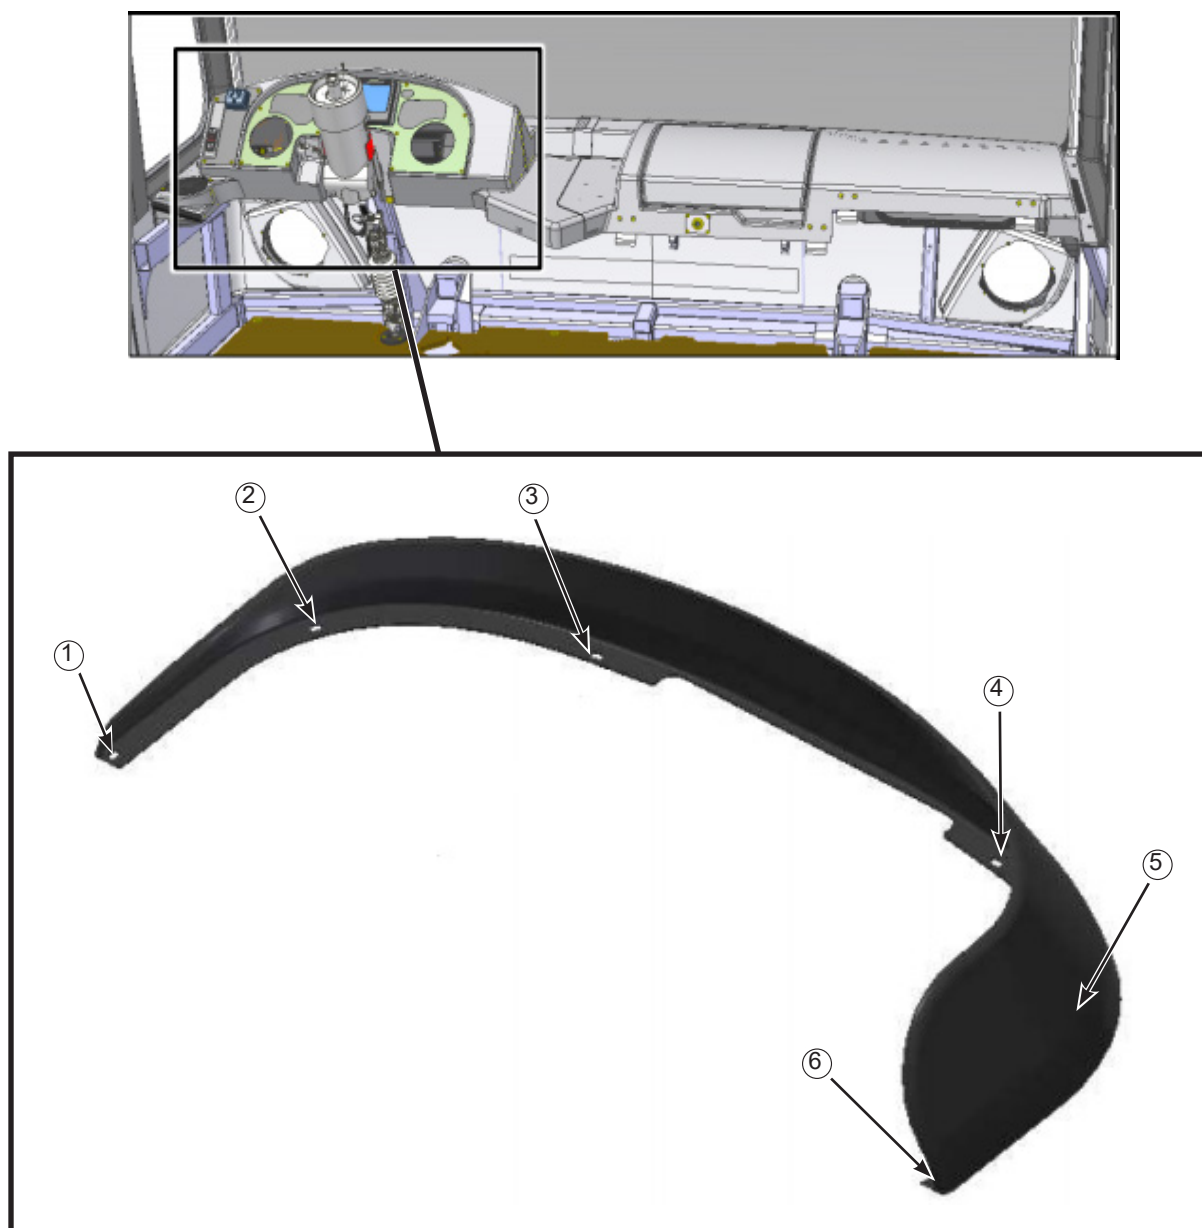


Figure 3 - Washer Installation Positions

- 1.5. Access the driver dash panel
- 1.6. Remove the screw on the cover shade dash.
- 1.7. Reinstall the screw with washer PN N80261
- 1.8. Repeat the procedure for all 6 screws
- 1.9. Bus is ready for service ❖