

Technical Journal

TITLE:

Water coming out when opening front and rear door

REF NO: TJ 35905.1.0	ISSUING DEPARTMENT: Technical Service	CAR MARKET: United States and Canada	
PARTNER: 3 US 7515		ISSUE DATE: 2021-05-05	STATUS DATE: 2021-05-12
FUNC GROUP: 8451	FUNC DESC: Sealing moulding for side door	Page 1 of 7	

Attachment

File Name	File Size
TJI-520699-1_1_0_en-US.pdf	0.9027 MB

DESCRIPTION:

If water coming out when opening the door, follow advice under “service”.

CSC Customer Symptom Codes

Code	Description
R1	Doors/Water leakage/Front side door
R2	Doors/Water leakage/Rear side door

DTC Diagnostic Trouble Codes**Vehicle Type**

Type	Eng	Eng Desc	Sales	Body	Gear	Steer	Model Year	Plant	Chassis range	Struc Week Range
534							2021-2099		0000001-9999999	202007-209952

SERVICE:

Apply sealing (Würth PN 08901002) on top of bracket inside the door according to instruction.
Use application nozzle from Chemical portal, part number 08916533.

*To get warranty claim accepted for a job described in this TJ, please use following data:
VST OP number: 98763-2*

Technical Journal 35905.1.0

VST Operation Number

VST Operation Number	Description
98763-2	Sealing reinforcement plate door acc. to TJ-35905

LABOR TIME:

2.5

Labor time subject to change without notice.

VEHICLE REPORT:

Yes, please submit a Vehicle Report if the service solution described in this TJ has no effect. Use concern area "Vehicle Report Polestar" and sub concern area "Support not needed Polestar", use function group 8451.

To view TJ attachment continue to next page. This TJ has one attachment.



Volvo Car Customer Service

TJ Instruction VCC-520699-1

Title	Side door	Page	1 (5)
Action	Product fix	Operation number:	98763-2

Issue	Date	Reason
1	2021-04	First issue

Affected vehicles

Model year	Model
2021	Polestar 2


Materials

Materials	Qty.	Part No.	Notes
Glue	0.2	8750060	

Equipment

Designation	Part No.
Twistable nozzle	

Color symbols

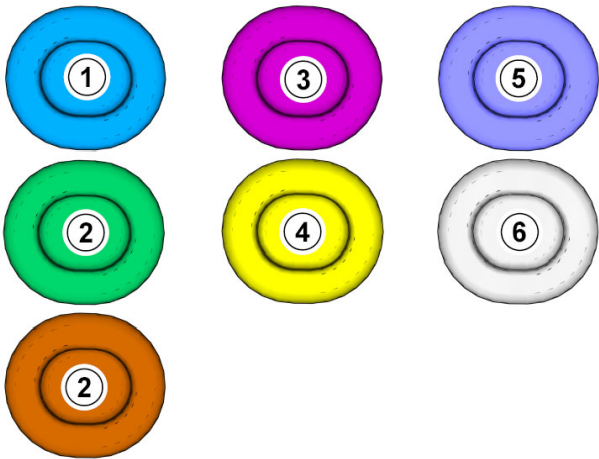


Note! This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.

- 1 . Used for focused component, the component with which you will do something.
- 2 . Used as extra colors when you need to show or differentiate additional parts.
- 3 . Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4 . Used when the component is not fully removed from the vehicle but only hung to the side.
- 5 . Used for standard tools and special tools.
- 6 . Used as background color for vehicle components.


Removal

Applies to front door

Remove power window lift mechanism side door front , refer to:
Removal, replacement and installation
8 - Body and interior
83 - Doors and lids
835 - window lift

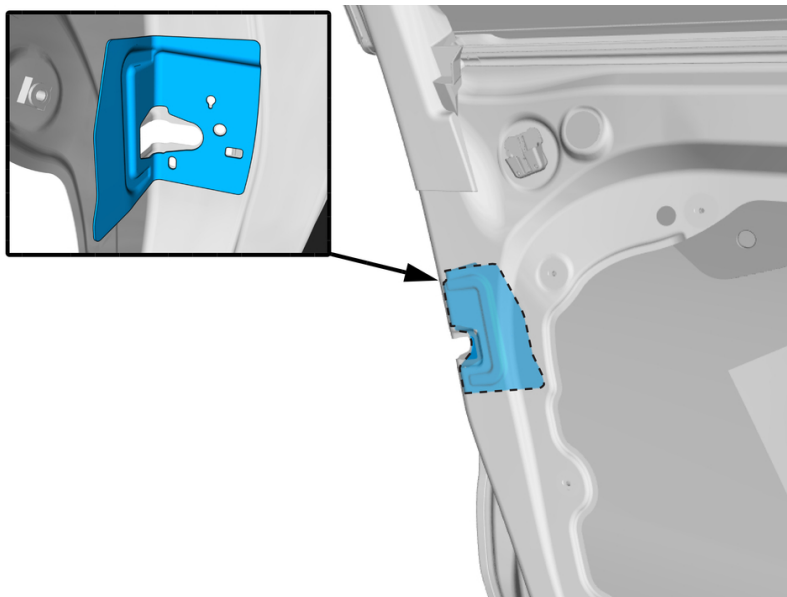


Note! Orientation view

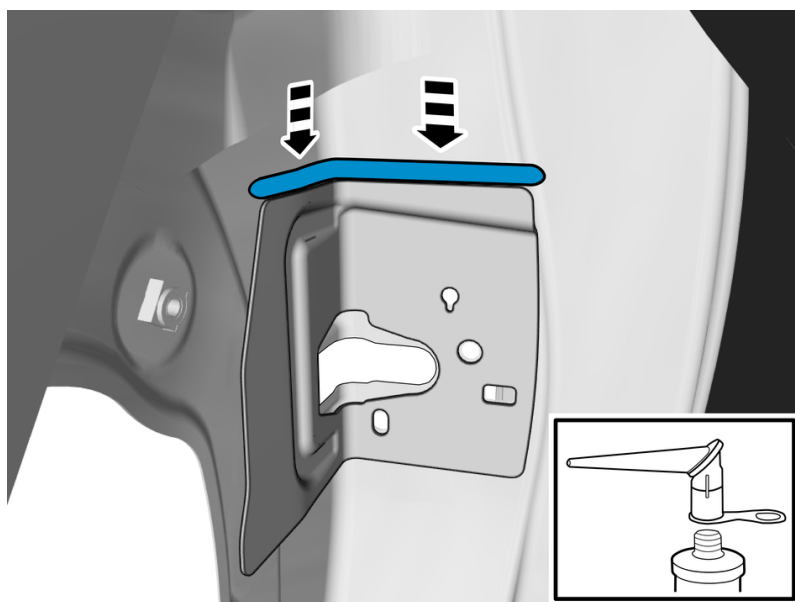

Apply the specified material.

Use: Twistable nozzle

Use: Glue , 8750060

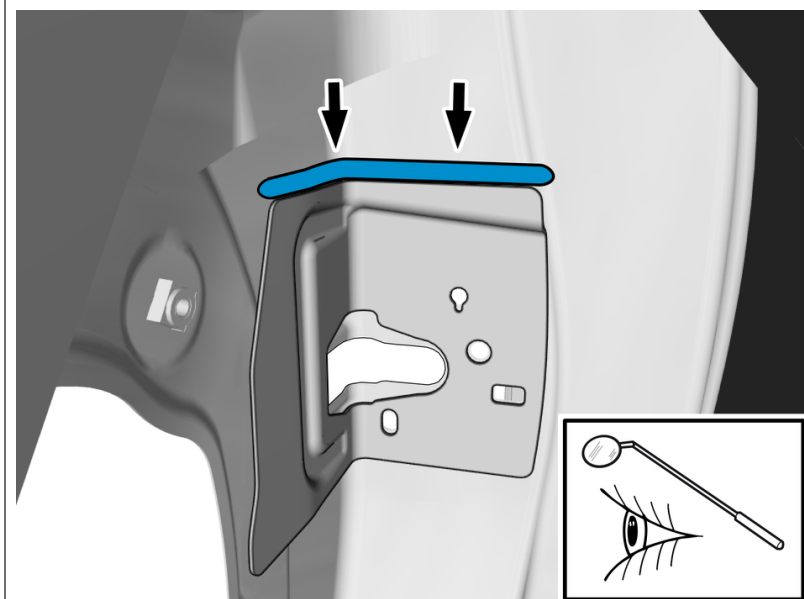

Caution! Make sure that all openings are sealed.

Applies to rear door


Remove power window lift mechanism side door rear , refer to:

Removal, replacement and installation


8 - Body and interior

83 - Doors and lids

835 - window lift

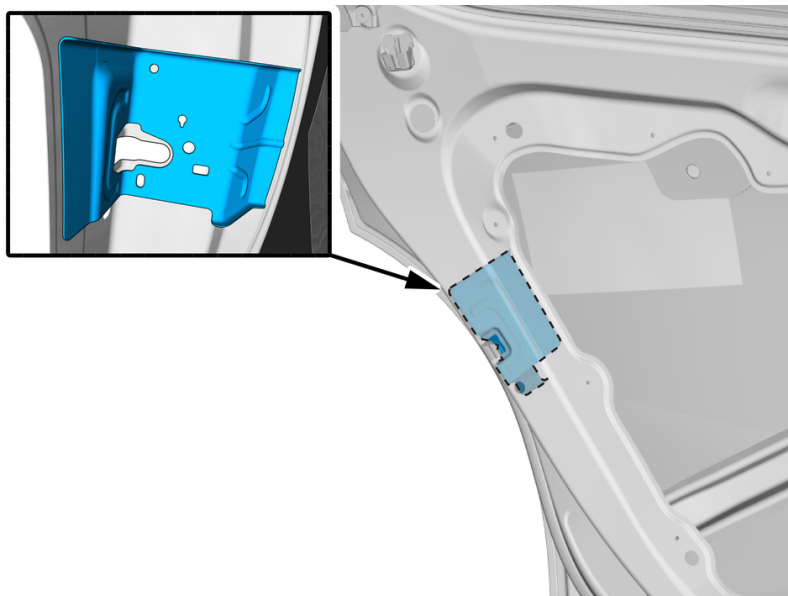


Note! Orientation view

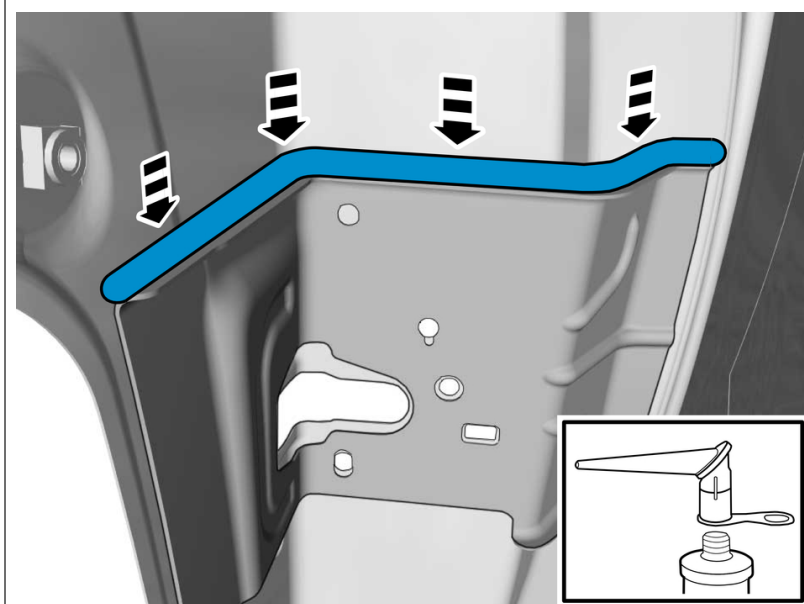

Apply the specified material.

Use: Twistable nozzle

Use: Glue , 8750060

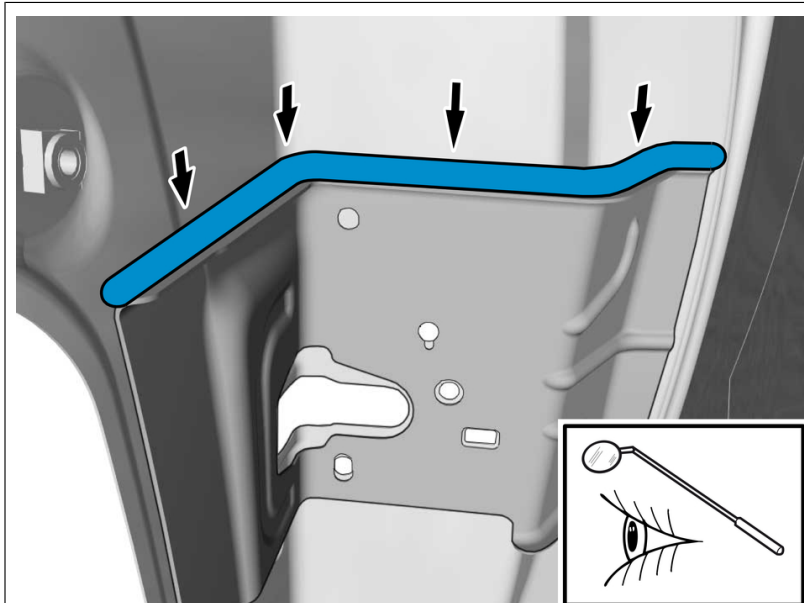

Caution! Make sure that all openings are sealed.

Reinstall the removed parts in reverse order.