




VAULT®
HYBRID LUBRICATION

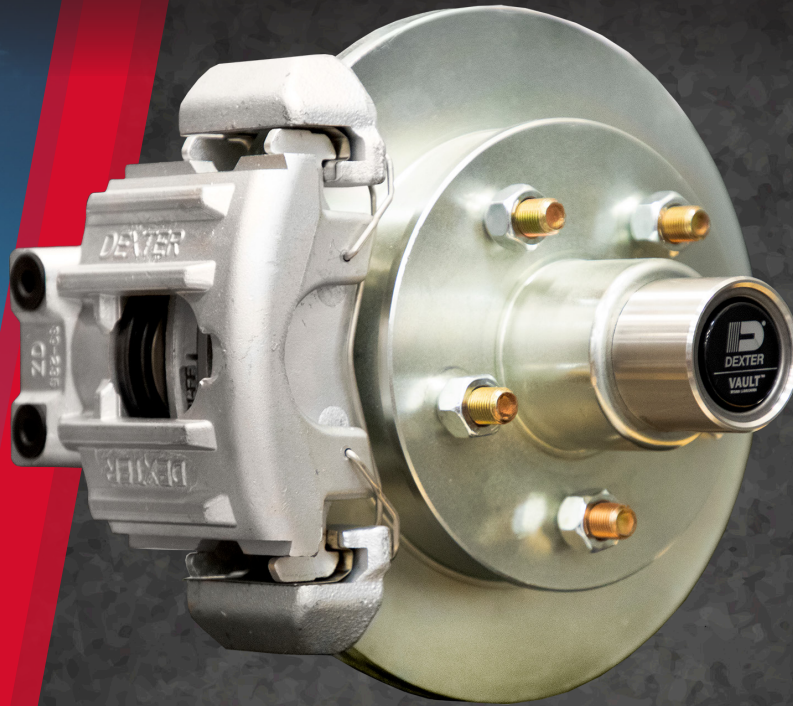

Premium bearing system reduces
maintenance cost

Proven design engineered especially for marine
applications

Pressurized hub cavity keeps out contaminants

Proprietary lubrication provides less friction for
cooler running bearings

6-year limited warranty




VAULT®
HYBRID LUBRICATION

HYBRID LUBRICATION SYSTEM

THE VAULT® HYBRID LUBRICATION SYSTEM USES A SEMI-FLUID OIL IN A PRESSURIZED CHAMBER TO GIVE YOU THE ULTIMATE IN WHEEL BEARING LUBRICATION AND PROTECTION.


At ambient temperature, the hybrid oil lubrication is thick with a viscosity approaching grease. As the bearing temperature rises during towing, the lubricant thins out, replenishing the bearing, reducing friction and dissipating heat. No inspection, no maintenance and no service required.

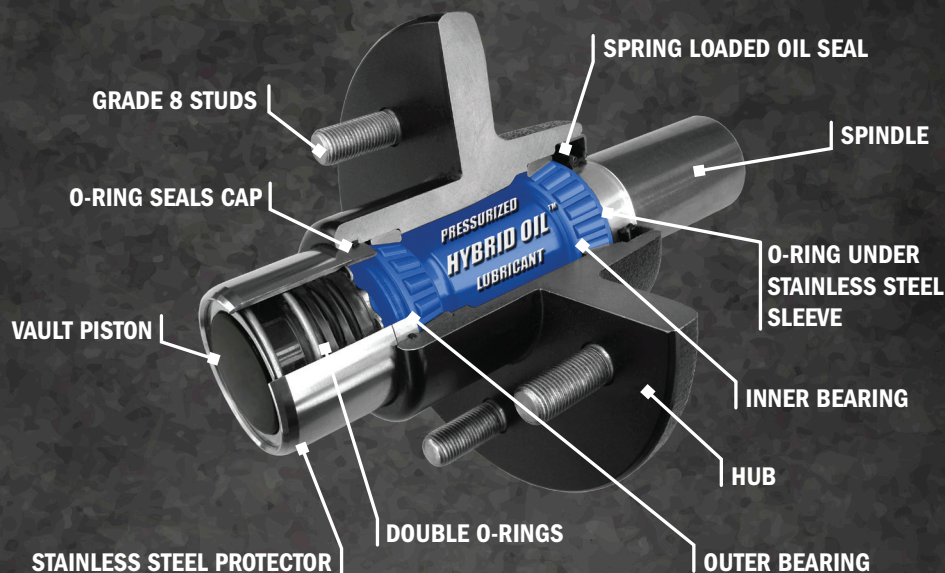

See the VAULT Difference

Features and Benefits	VAULT	Grease	Oil
Adheres to bearings	✓	✓	✗
Will not leak out of hub	✓	✓	✗
Works in pressurized systems	✓	✓	✗
Bearings run cooler	✓	✗	✓
Reduced friction	✓	✗	✓
Reduced bearing wear	✓	✗	✓
Replenishes lubricant to the bearing	✓	✗	✓
No inspection required	✓	✗	✗
No maintenance required	✓	✗	✗
No service required	✓	✗	✗

Temperature of Wheel Bearings Hybrid Oil Lubricant vs. Grease

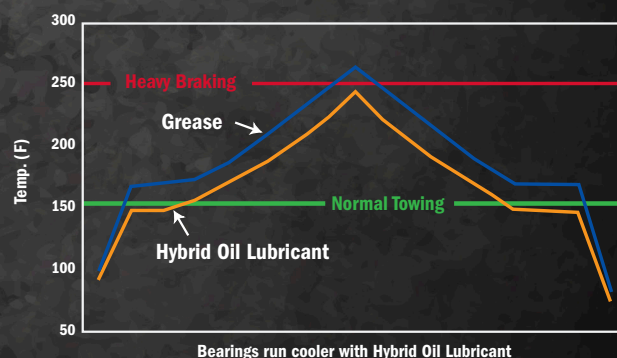

VAULT®
HYBRID LUBRICATION

www.dexteraxle.com