



An Oshkosh Corporation Company

General Bulletin: GB2021002

SIII Crane Harness Radio Eliminate Cable Connector

Classification	Modification
Subject:	Installation of Deviated Radio Eliminate Cable Connector
Attn:	IMT Distributors
From:	IMT Technical Support (800-554-4421 or 641-923-4633)
Date:	December 2021
Affected Models:	2021 SIII Telescopic Cranes

Due to the world-wide supply chain shortages, there is a deviation to the SIII telescopic crane harnesses. The radio eliminate cable connector requires a mounting hole which is different from the standard mounting hole. A matching mounting hole bracket is attached to each deviated harness. Part numbers are 60147041 (Bracket-M12 Unlimited Deviation #1) or 60147054 (Bracket-M12 Unlimited Deviation #2).

How To Mount The Radio Eliminate Cable Connector Using The Supplied Mounting Bracket:

A. Connector mounted on the SIII body control panel:


1. See step-by-step instructions on page two.

B. Connector not mounted on the SIII control panel:

1. Mount the radio eliminate connector on the mounting bracket.
2. Fasten the mounting bracket in a suitable location.

NOTE: The technician installing the radio eliminate cable must verify:

1. The harness routing.
2. The mounting hole bracket is securely fastened.
3. System functionality, including operation with tether connection. For this step remove Lock-Out / Tag-Out.

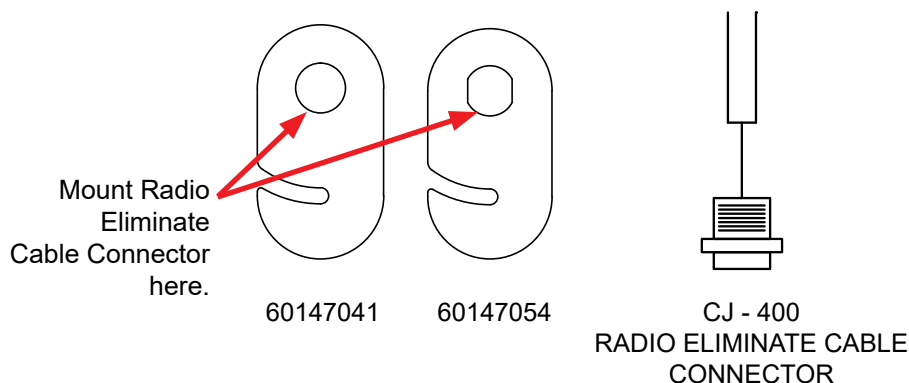


SAFETY NOTICES

Follow your company's Lock-Out / Tag-Out procedures to prevent the truck from being started or moved while performing work on this chassis. If your company does not have a Lock-Out/Tag-Out procedure, follow OSHA 1910.147, Lock-Out / Tag-Out. Use appropriate Personal Protective Equipment (PPE) as required by your company. Read and understand the following instructions found within this document prior to starting work on the crane.

Iowa Mold Tooling Co., Inc.
500 Highway 18 West • P.O. Box 189 • Garner, IA 50438-0189
641-923-3711
www.imt.com

SIII Crane Harness Radio Eliminate Cable Connector Mounting Hole Bracket Instructions

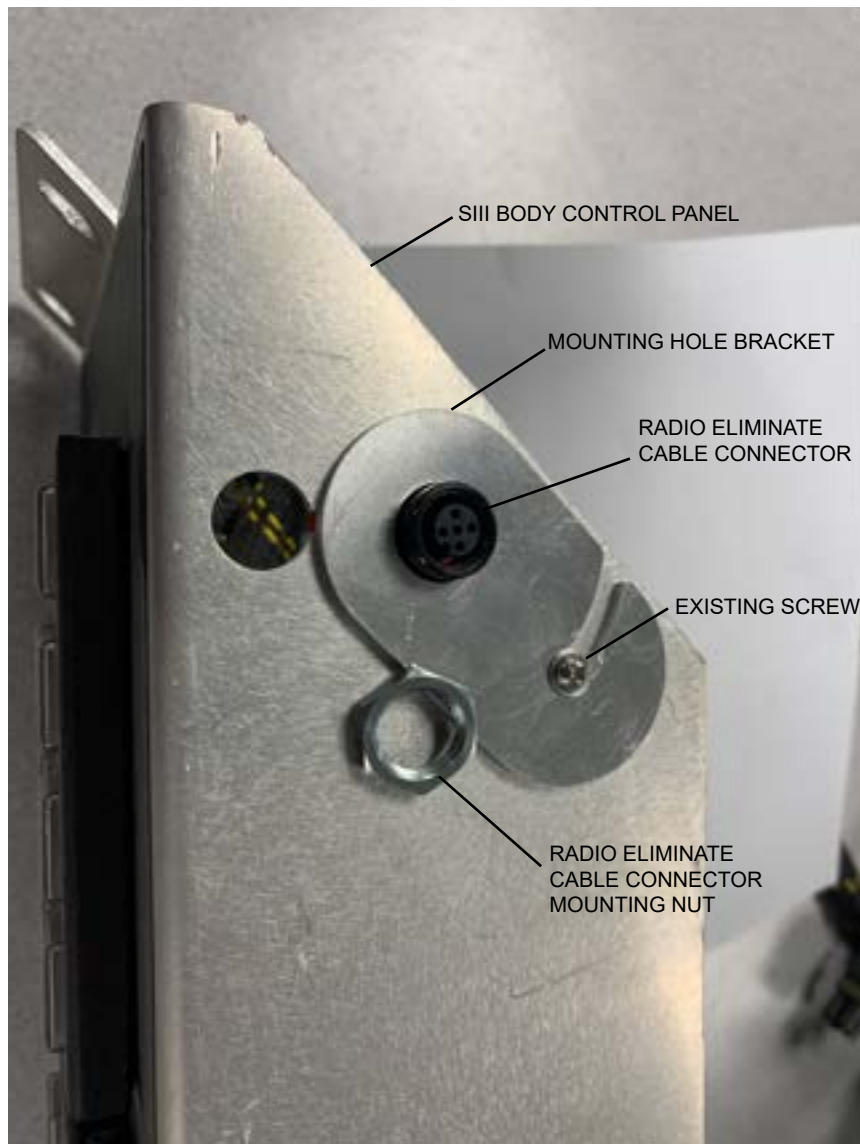

1. Slide radio eliminate connector through opening (not visible in picture, covered by mounting hole bracket.) in SIII Body Control Panel located in the crane compartment.
2. Mount radio cable connector to mounting hole bracket. Tighten with radio eliminate cable connector mounting nut.
3. Take mounting hole bracket that has the radio eliminate cable connector already installed (step 2), and place on the SIII Body Control Panel.
4. Loosen existing screw and slide the mounting hole bracket underneath the screw head and washer as shown in the picture. Tighten the existing screw to secure the mounting hole bracket to the SIII Body Control Panel.