

March 2022  
SF625A  
REVISED NOTICE

## **Subject: Freightliner Cascadia 3G to 4G Common Telematics Platform (CTP) Update**

**Models Affected: Specific model year 2017-2020 Freightliner Cascadia vehicles manufactured September 14, 2016, through June 14, 2019.**

### **General Information**

**REVISION:** The work instructions have been updated with additional information regarding the USB flash drive, USB adapter, and the software download procedure. The minimum recommended size of the USB flash drive has been increased to 2 GB.

Daimler Truck North America LLC (DTNA), on behalf of its Freightliner Trucks Division, is initiating Field Service Campaign SF625A to modify the vehicles mentioned above.

The AT&T 3G network is being phased out beginning February 2022. 3G CTP will no longer be functional after the shutdown is complete.

The 3G CTPs will be updated with AT&T 4G hardware and software.

There are approximately 7,335 vehicles involved in this campaign.

#### **Additional Repairs**

Dealers must complete all outstanding Recall and Field Service campaigns prior to the sale or delivery of a vehicle. A Dealer will be liable for any progressive damage that results from its failure to complete campaigns before sale or delivery of a vehicle.

Owners may be liable for any progressive damage that results from failure to complete campaigns within a reasonable time after receiving notification.

Please contact Warranty Campaigns for consideration of additional charges prior to performing the repair.

### **Work Instructions**

Please refer to the attached work instructions. Prior to performing the campaign, check the vehicle for a completion sticker (Form WAR261).

### **Replacement Parts**

**NOTE:** A dealer-provided USB flash drive with a storage capacity of 2 to 32 GB, and a mini USB adapter cable are required in order to complete the SF625 CTP update. The same USB flash drive can be used to update multiple vehicles, and the configuration file only needs to be downloaded once per computer. In the work instructions section, see [Fig. 1](#) and [Fig. 2](#).

Replacement parts are now available and can be obtained by ordering the kit and/or part number(s) listed below from your facing Parts Distribution Center.

If our records show your dealership has ordered any vehicle(s) involved in campaign number SF625, a list of the customers and vehicle identification numbers will be available on DTNAConnect. Please refer to this list when ordering parts for this campaign.

March 2022  
SF625A  
REVISED NOTICE

**Table 1** - Replacement Parts for SF625

| Campaign Number | Kit/Part Number | Part Description                     | Qty. |
|-----------------|-----------------|--------------------------------------|------|
| SF625A          | A66-29671-000   | AT&T UNITE EXPRESS 2 WI_FI HOTSPOT   | 1 ea |
|                 |                 | WI_FI HOTSPOT BATTERY                |      |
|                 |                 | BATTERY COVER                        |      |
|                 |                 | USB CHARGING CABLE FOR WI_FI HOTSPOT |      |
|                 |                 | VOITA 12v-5v DC CONVERTER            |      |
|                 | BUS BK/ATM 5    | FUSE - MINI, 5AMP, MP280             | 1 ea |
|                 | WAR261          | BLANK COMPLETION STICKER             | 1 ea |

**Table 1**

## Removed Parts

U.S. and Canadian Dealers, please follow Warranty Failed Parts Tracking shipping instructions for the disposition of all removed parts. Export distributors, please destroy removed parts unless otherwise advised.

## Labor Allowance

**Table 2** - Labor Allowance

| Campaign Number | Procedure                                      | Time Allowed (hours) | SRT Code  | Corrective Action         |
|-----------------|------------------------------------------------|----------------------|-----------|---------------------------|
| SF625A          | INSTALL WI_FI HOTSPOT & CONVERTER, PROGRAM CTP | 1.7                  | 996-F121A | 12-Repair Recall/Campaign |

**Table 2**

### IMPORTANT - Before Beginning Work:

- Check OWL to ensure the vehicle is involved and the campaign has not previously been completed.
- Check the vehicle for a completion sticker.

### IMPORTANT - After Repair is Complete:

- Attach a gray completion sticker (Form WAR261) to the base completion label (Form WAR259). If the vehicle does not already have a base completion label, clean a spot on the appropriate location of the vehicle, and attach a base completion label, prior to installing the completion sticker.

March 2022  
SF625A  
REVISED NOTICE

## Claims for Credit

You will be reimbursed for your parts, labor, and handling (landed cost for Export Distributors) by submitting a claim. Please reference the following information in OWL:

- All claims must be submitted within 30 days of the repair date.
- Claim type is **Field Service Campaign**.
- In the Campaign field, enter the campaign number and appropriate condition code (**SF625-A**).
- In the Primary Failed Part field, enter **25-SF625-000**.
- In the Parts section, enter the appropriate kit and/or part number(s) as shown in the Replacement Parts Table.
- In the Labor section, enter the appropriate SRT from the Labor Allowance Table. Administrative time will be included automatically as SRT 939-6010A for 0.3 hours.
- The VMRS Component Code is **F99-999-005** and the Cause Code is **A1 - Campaign**.
- This Field Service Campaign will **terminate on December 19, 2022**. Dealers will be notified of any changes to the termination date via an Important Campaign Information Letter posted on DTNACconnect.com.

**Excess Inventory:** U.S. and Canadian dealers, following the conclusion of the campaign, within 90 days from the termination date, excess inventory in resalable condition may be returned to the appropriate PDC. U.S. dealers, submit a PAR to request return to the Memphis PDC. Canadian dealers, return inventory to your facing PDC. Export Distributors, excess inventory is not returnable.

**For Support:** Contact the Warranty Campaigns Department via the Warranty Support Center at DTNACconnect.com/WSC or the Customer Assistance Center at (800) 385-4357. Export distributors, submit a WSC ticket or contact your International Service Manager.

March 2022  
SF625A

## Copy of Original Notice to Owners

### **Subject: Freightliner Cascadia 3G to 4G Common Telematics Platform (CTP) Update**

Daimler Truck North America LLC (DTNA), on behalf of its Freightliner Trucks Division, is initiating Field Service Campaign SF625A to modify specific model years 2017-2020 Freightliner Cascadia vehicles manufactured September 14, 2016, through June 14, 2019.

The AT&T 3G network will be shut down and no 3G CTP will be functional after the February 2022 planned shutdown date.

The 3G CTPs will be updated with AT&T 4G hardware and software.

Please contact an authorized DTNA dealer to arrange to have the campaign performed and to ensure that parts are available at the dealership. The campaign will take approximately two hours and will be performed at no charge to you. To locate an authorized dealer, search online at [NorthAmerica.DaimlerTruck.com/contact-us/](http://NorthAmerica.DaimlerTruck.com/contact-us/). Scroll down to "Locate a Dealer," and select the appropriate brand.

This Field Service Campaign will **terminate on December 19, 2022**. Please make sure the campaign is completed prior to this date. Work completed after this date will be done at the customer's expense.

As stated in the terms of your express limited warranty, DTNA will not pay for any damage caused by failure to properly maintain your vehicle. DTNA considers the work necessary under this campaign to be proper maintenance and will, therefore, not pay for any damage to your vehicle caused by your failure to have the repairs that are the subject of this campaign performed in a reasonable time.

Contact the Warranty Campaigns Department at (800) 547-0712, e-mail address [DTNA.Warranty.Campaigns@Daimlertruck.com](mailto:DTNA.Warranty.Campaigns@Daimlertruck.com), or the Customer Assistance Center at (800) 385-4357, if you have any questions or need additional information.

WARRANTY CAMPAIGNS DEPARTMENT

Enclosure

March 2022  
SF625A  
REVISED NOTICE

## Work Instructions

### Subject: Freightliner Cascadia 3G to 4G Common Telematics Platform (CTP) Update

**Models Affected:** Specific model year 2017-2020 Freightliner Cascadia vehicles manufactured September 14, 2016, through June 14, 2019.

**REVISION:** The work instructions have been updated with additional information regarding the USB flash drive, USB adapter, and the software download procedure. The minimum recommended size of the USB flash drive has been increased to 2 GB.

#### NOTE:

- The configuration file only has to be downloaded once; this file can be used to update multiple vehicles using the same USB drive.
- A dealer provided USB drive with a storage capacity of 2 to 32 GB is required to complete the CTP software update, as shown in [Fig. 1](#).
- A dealer provided mini USB adapter is also required to complete the CTP software update. See [Fig. 2](#).

The USB Adapter must be On-the-Go (OTG) protocol compliant. Non-OTG compliant adapters may result in failure of the CTP software update.



Fig. 1, USB Flash Drive



Fig. 2, USB A Female to Mini USB B 5-Pin Male Adapter Cable

## Software Download

1. Check the base label (Form WAR259) for a completion sticker for SF625 (Form WAR261) indicating this work has been done. The base label is usually located on the passenger door about 12 inches (30 cm) below the door latch. If a sticker is present, no work is needed. If there is no sticker, proceed with the next step.

March 2022  
SF625A  
REVISED NOTICE

- On the laptop, create a new folder and name it 'SF625 USB Stick Flashing.' Make a note of the folder's location.
- On the laptop, go to DTNA Connect, then select the three menu bars at the upper right-hand corner of the web page. See [Fig. 3](#).

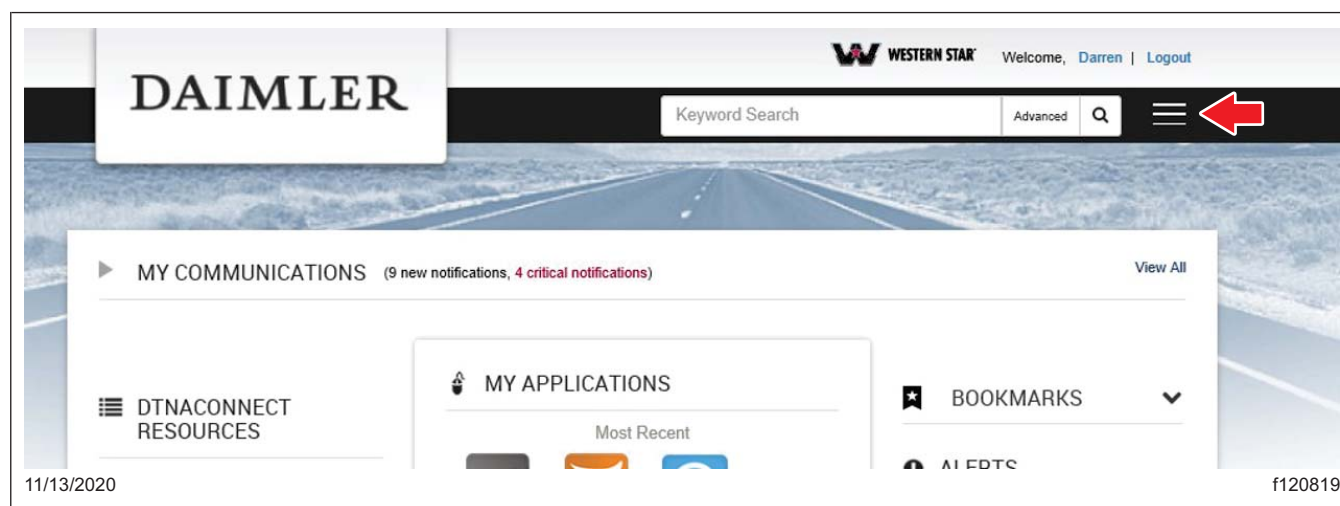


Fig. 3, DTNA Connect Home Screen

- Select 'Support,' and then select 'Download Center.' See [Fig. 4](#).

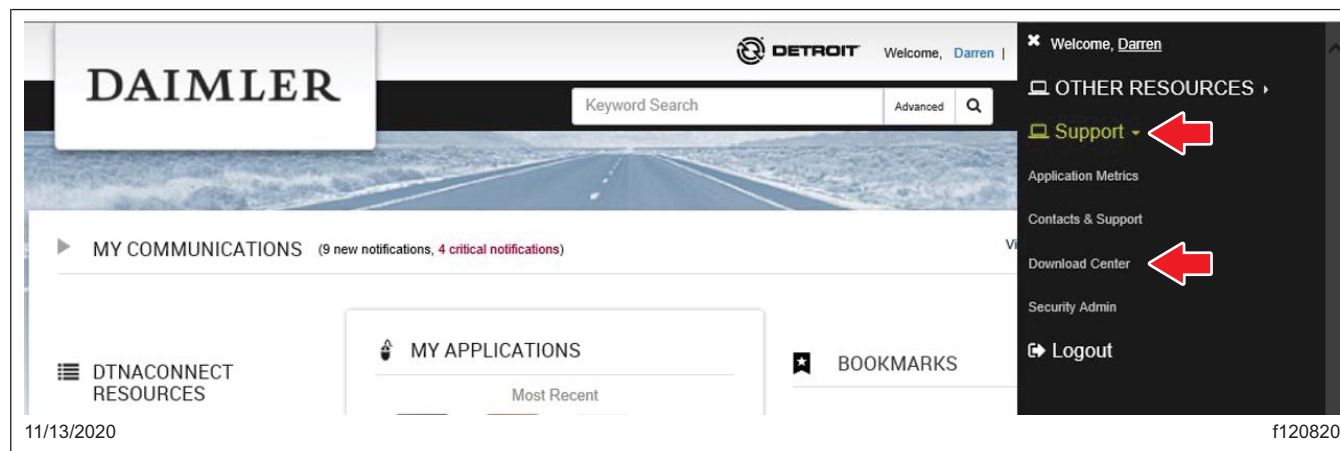


Fig. 4, Selecting Download Center

- Scroll down to 'SF625- CTP 3G TO 4G SOFTWARE' then select the '+' symbol. Select 'Download SF625- CTP 3G to 4G Software'. See [Fig. 5](#).

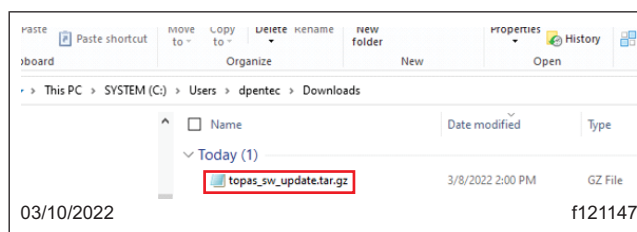


Fig. 5, Download SF625- CTP 3G to 4G Software Link

March 2022  
SF625A  
REVISED NOTICE

NOTE: Depending on the operating system and/or the browser, the laptop may either ask you to select a location to save, or automatically save the file in the 'Downloads' folder.

6. A download box will appear in the upper right corner of the browser window. Once the download is complete, open the 'Downloads' folder and verify the downloaded file name is 'topas\_sw\_update.tar.gz.' See [Fig. 6](#).



**Fig. 6, Downloaded Software**

IMPORTANT: Multiple software downloads on the same laptop may result in the file name being changed due to duplicate copies. Make sure only the file with the original name 'topas\_sw\_update.tar.gz' is used for this procedure.

NOTE: If the file extension '.gz' is not showing, in the menu bar, go to 'View,' then make sure the checkbox next to 'File name extensions' is checked.

7. Move the downloaded file 'topas\_sw\_update.tar.gz' to folder 'SF625 USB Stick Flashing' that was created in step 2.
8. Insert a USB drive into a USB port of the laptop.

IMPORTANT: The USB drive must have 2 to 32 GB of storage space. It is recommended to format the USB drive before using it for this software update; this will result in the contents (if any) of the USB drive to be permanently erased.

9. Format the USB drive as follows.
  - 9.1 Right click on the USB drive in the laptop, then select 'Format.'
  - 9.2 In the 'File system' drop down menu, select 'FAT32 (Default).'
  - 9.3 In the 'Format USB Drive' window that appears, select 'Start.'
  - 9.4 In the warning message window that appears, select 'OK.'
  - 9.5 Once the formatting is complete, a 'Format Complete' message window will appear. Select 'OK,' then close the 'Format USB Drive' window.
10. Copy the downloaded file 'topas\_sw\_update.tar.gz' to the USB flash drive.
  - 10.1 Verify that the name of the file copied to the USB flash drive matches 'topas\_sw\_update.tar.gz.'
  - 10.2 Right click on the USB drive, then select 'Eject.'
  - 10.3 Remove the USB flash drive from the laptop.
  - 10.4 Insert the USB flash drive into the laptop again.
  - 10.5 Navigate to the USB drive and again verify that the name of the file copied to the USB flash drive matches 'topas\_sw\_update.tar.gz.' Make sure no other file is present on the USB flash drive.
  - 10.6 Take a screenshot of the contents of the USB flash drive file and save it.
  - 10.7 Right click on the USB drive, then select 'Eject.'
  - 10.8 Remove the USB flash drive from the laptop.

March 2022  
SF625A  
REVISED NOTICE


11. Write the campaign number, SF625, on a blank label, and attach it to the USB drive, as shown in [Fig. 7](#). This USB drive can be used to update multiple vehicles as noted at the beginning of the work instructions.



**Fig. 7, USB Flash Drive Labeled SF625**

## Unite Express 2 (UE2) Wi-Fi Hotspot Setup and DC Converter Installation

1. From the SF625 parts kit, open the 'AT&T Unite Express 2' box, and identify the following components which will be used to set up a Wi-Fi hotspot in the vehicle. See [Fig. 8](#).
  - UE2 Wi-Fi hotspot device
  - USB charging cable
  - Voita 12v to 5v DC Converter

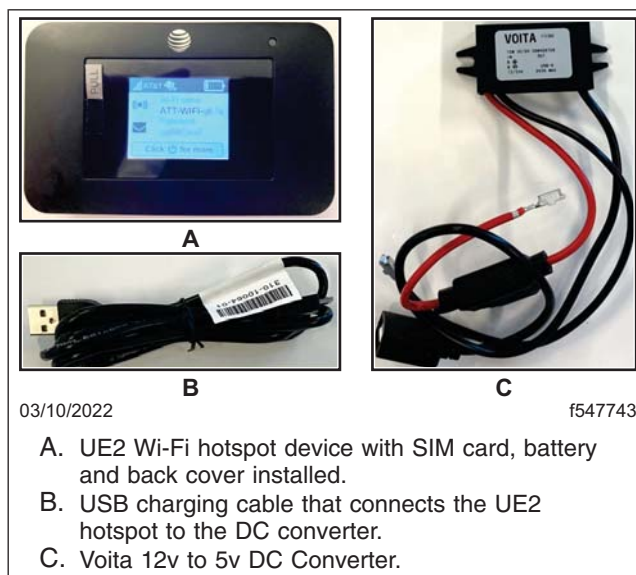


- A. UE2 Wi-Fi hotspot device with SIM card, battery and back cover installed.
- B. USB charging cable that connects the UE2 hotspot to the DC converter.
- C. Voita 12v to 5v DC Converter.

**Fig. 8, Units Ready to be Installed in the Vehicle**


March 2022  
SF625A  
REVISED NOTICE

IMPORTANT: If the UE2 hotspot device battery is low, the device may not turn on after 10 seconds of pressing the button. Use the 110 volts wall plug adapter and USB charging cable to charge the UE2 hotspot device enough to make notes, or take a picture of the Wi-Fi name and password for later use. See [Fig. 9](#).

2. To turn on the UE2 Wi-Fi hotspot device, press and hold the power button for up to 10 seconds. The blue status indicator light should start blinking. Within two minutes, the hotspot device screen should turn on. See [Fig. 10](#).

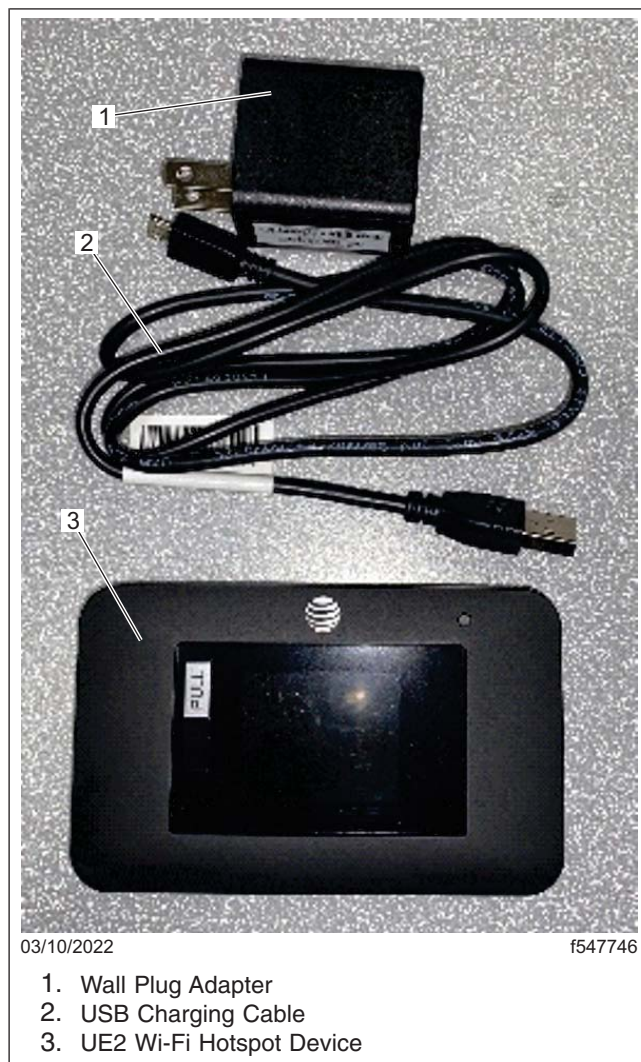

**Fig. 9, UE2 Wi-Fi Hotspot Device Wall Charger Setup**

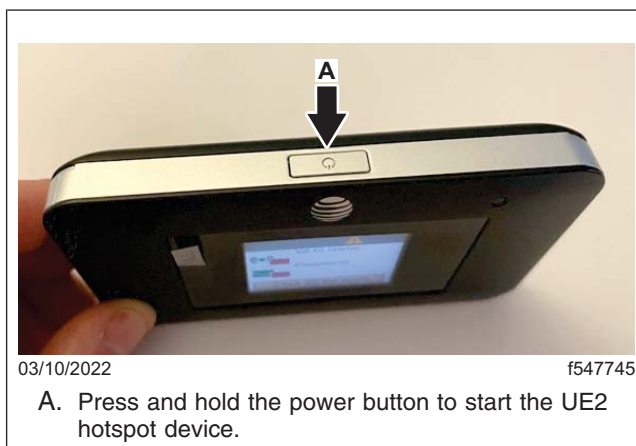


**Fig. 10, UE2 Wi-Fi Hotspot Device Power Button**

March 2022  
SF625A  
REVISED NOTICE


NOTE: When turned on, the UE2 hotspot device will display the Wi-Fi name and password on the screen. See [Fig. 11](#). The information in this screen will be later used in the 'CTP 3G Sundown panel' window.

Some Wi-Fi hotspot devices have a Wi-Fi name that does not fit on one line, and the text on the hotspot screen will need to wrap to the next line in order to show the full name.

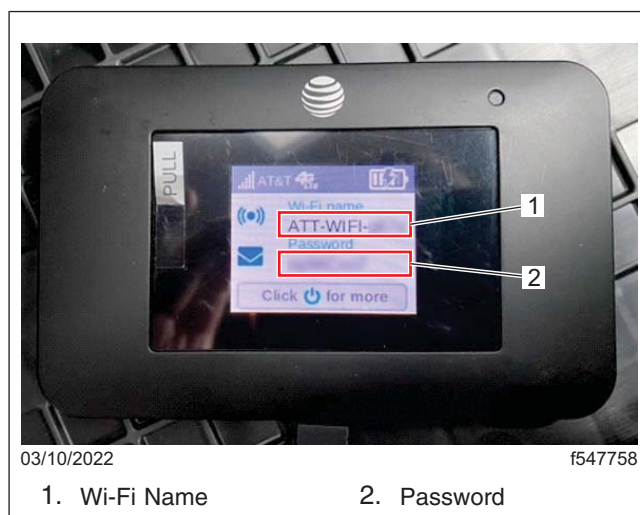

**Fig. 11, Wi-Fi Name and Password Displayed on the Screen**

3. Open the fuse cover on the Voita 12v to 5v DC converter, and verify that a 3-amp mini fuse is installed. If not already installed, install a 3-amp mini fuse into the fuse housing. See [Fig. 12](#).

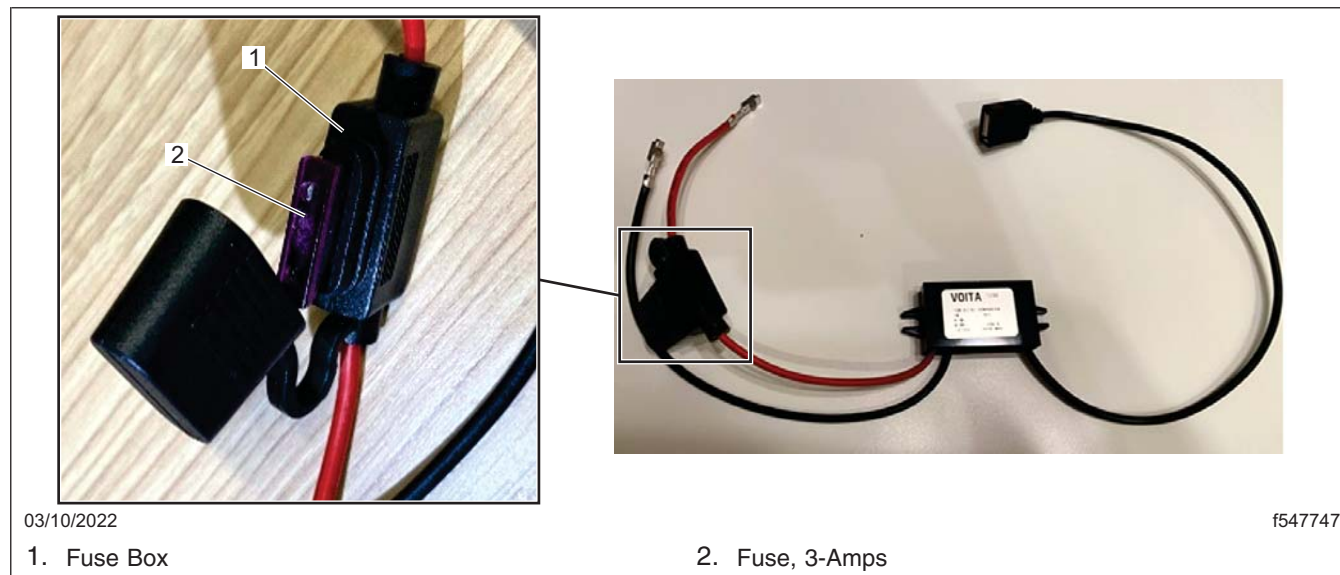


**Fig. 12, Voita 12 Volts to 5 Volts DC Converter**

4. Remove the electronics bay cover and the passenger-side lower dash cover. For instructions, see **Group 60** of the applicable workshop manual.
5. Open the vehicle power distribution module (VPDM) front cover.

March 2022  
SF625A  
REVISED NOTICE

6. Locate the fuse location F68 in the VPDM. Verify that a 5-amp mini fuse is installed in the VPDM location F68. See [Fig. 13](#).

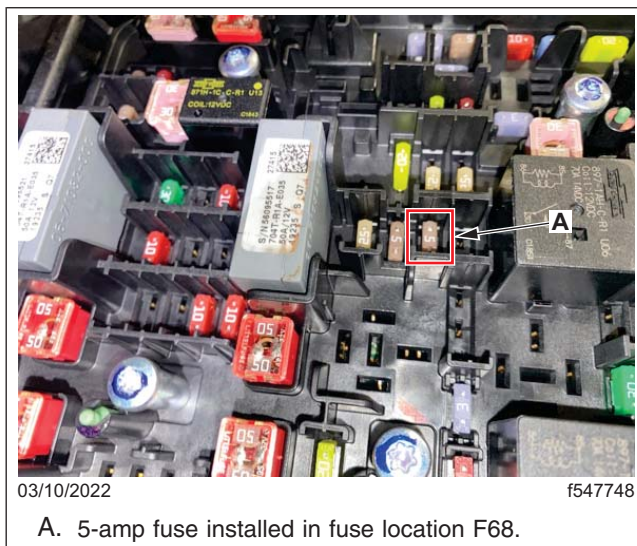

**Fig. 13, Fuse Location F68 in the VPDM**

- 6.1 If there is no fuse installed, install a new 5-amp fuse into the F68 fuse location.
- 6.2 If a fuse of ampere value less than 5-amperes is installed, remove the fuse using the white plastic fuse pick located in the VPDM, then install a 5-amp fuse into the F68 fuse location.

March 2022  
SF625A  
REVISED NOTICE

NOTE: The connector captured screw is captive and will not come out of the VPDM housing completely. The screw must be fully loosened to detach the J6 connector.

7. Loosen the J6 connector captured screw in the VPDM. See [Fig. 14](#).



**Fig. 14, J6 Connector Captured Screw**

March 2022  
SF625A  
REVISED NOTICE

## NOTICE

**Make sure that the cab floor is clear of debris and tools. If the VPDM is lowered on to debris, especially metal objects, it could permanently damage the VPDM.**


IMPORTANT: The VPDM is positioned on the mounting tabs to assist with retaining the VPDM in position while mounting fasteners are removed. Care should be taken so the VPDM does not fall to floor after all four mounting fasteners have been removed.

8. Remove the four VPDM mounting fasteners, then gently lower the VPDM on to the cab floor. See [Fig. 15](#).



**Fig. 15, Lowering the VPDM to the Cab Floor**


9. Remove the VPDM back cover for access to the wiring and VPDM connector J6.
10. Remove the VPDM J6 connector from the VPDM. See [Fig. 16](#).

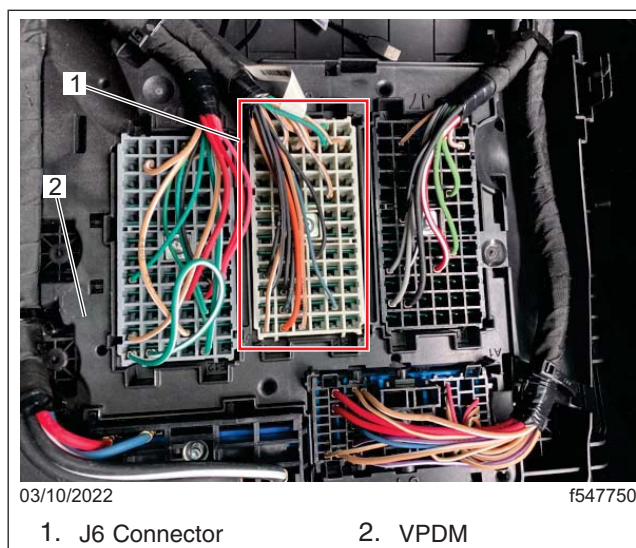

**Fig. 16, VPDM J6 Connector**


March 2022  
SF625A  
REVISED NOTICE

11. Using a small screwdriver or similar tool, pull the green secondary lock for cavities 7 through 12 from the J6 connector. See [Fig. 17](#).

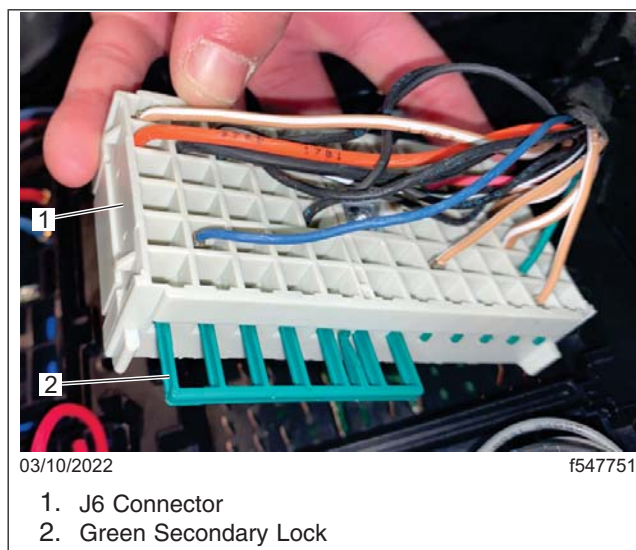

**Fig. 17, J6 Connector Green Secondary Lock**

12. Install the Voita 12v to 5v DC converter power and ground wires into the J6 connector as follows.
- 12.1 Insert the red (power) wire of the DC converter into the VPDM connector cavity J6-D12 until a click is heard or felt. See [Fig. 18](#). If cavity J6-D12 is already in use by another wire, then install the red wire into cavity J6-D11. If both J6-D12 and J6-D11 cavities are occupied, contact Daimler Truck Technical Support at 855-253-0422, option 4, (5:00 A.M to 4:00 P.M. PT).

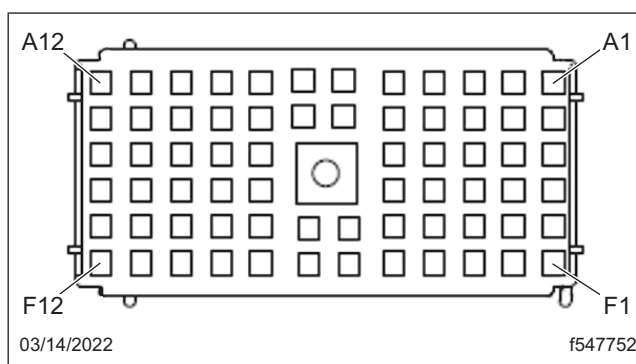


**Fig. 18, J6 Connector Cavity Locations**

- 12.2 Insert the black (ground) wire of the DC converter into the VPDM connector cavity J6-E8 until a click is heard or felt. See [Fig. 18](#). If cavity J6-E8 is already in use by another wire, then install the black wire into cavity J6-D8. If both J6-E8 and J6-D8 cavities are occupied, contact Daimler Truck Technical Support at 855-253-0422, option 4, (5:00 A.M to 4:00 P.M. PT).
13. Perform a gentle pull test to make sure the terminals are fully locked into the cavities.


March 2022  
SF625A  
REVISED NOTICE

14. Route the DC converter wires along the VPDM harness, then secure them with a tie strap. See [Fig. 19](#).

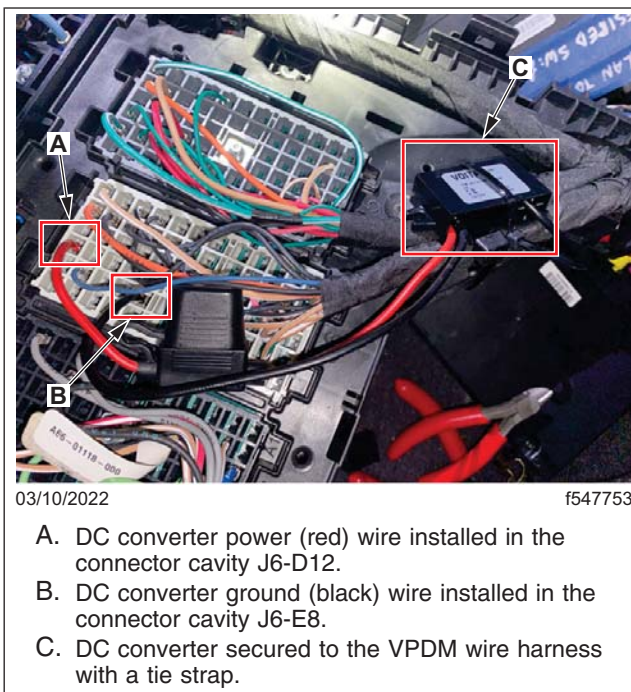

**Fig. 19, DC Converter Connected and Secured**

15. Install the green secondary terminal lock into the VPDM J6 connector.
16. Install the J6 connector into the VPDM. Secure the J6 connector to the VPDM by tightening the center captured screw 35 to 53 lbf-in (395 to 599 N-cm). See [Fig. 14](#).
17. Verify the J6 connector is fully seated into the VPDM by confirming the green indicator tab next to the captured screw extends outside the VPDM housing. See [Fig. 20](#).

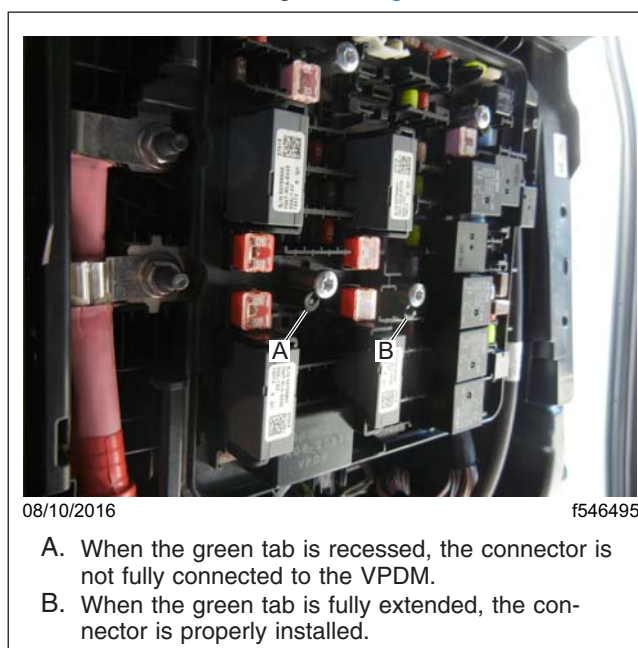

**Fig. 20, Tightening the Captured Screws**

March 2022  
SF625A  
REVISED NOTICE

18. Install the VPDM back cover, route the DC converter USB power output cable out from the VPDM, along the lower harness, before closing and locking the VPDM back cover. Close and lock the VPDM cover. See [Fig. 21](#)




**Fig. 21, USB Power Output Cable Routed Out from the VPDM**

19. Turn the vehicle ignition switch to the ON position. If the vehicle is equipped with a battery cut-off switch, turn the cut-off switch ON.

March 2022  
SF625A  
REVISED NOTICE

20. Using the USB cable that is included in the SF625 kit, connect the UE2 Wi-Fi hotspot device to the Voita 12v to 5v DC convertor. See [Fig. 22](#).

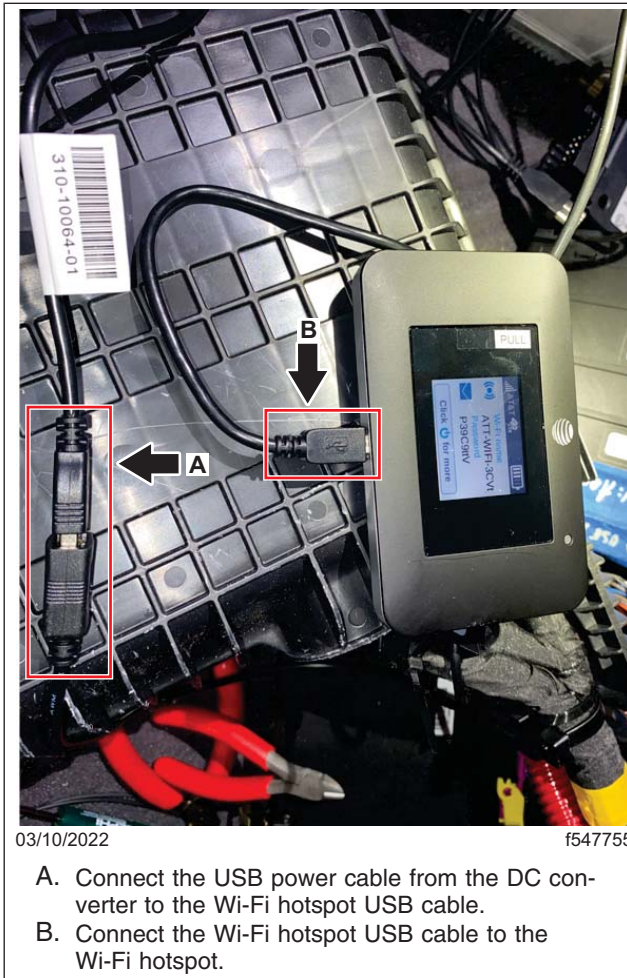


**Fig. 22, USB Charging Cable Connected to the UE2 Wi-Fi Hotspot Device**

March 2022  
SF625A  
REVISED NOTICE

21. Verify the battery charge indicator in the upper-right side of the UE2 Wi-Fi hotspot device screen has a lightning bolt charging icon. See **Fig. 23**.

If the UE2 Wi-Fi hotspot device's battery is completely drained, it may take 2 to 5 minutes for the hotspot to charge enough to turn on. Once the Wi-Fi hotspot device turns on, make sure the lightning bolt charging icon appears on the battery charge indicator in the upper-right side of the UE2 Wi-Fi hotspot device screen. If the lightning bolt charging icon still does not appear, follow the substeps below.

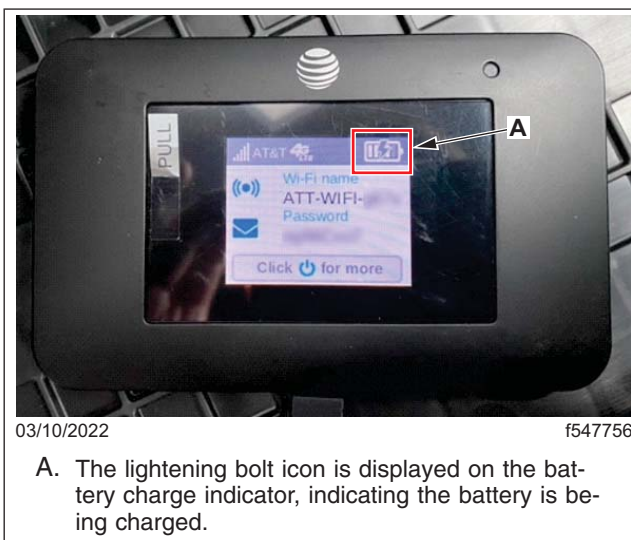

**Fig. 23, Lightning Bolt Icon Displayed on the Battery Charge Indicator**

- 21.1 Verify that a 5-amp fuse is installed in the VPDM fuse location F68.
- 21.2 Verify that 8v to 14v are being provided from the VPDM J6 connector cavities to the Voita 12v to 5v DC converter. It may be necessary to start and run the engine to rule out the possibility that a low voltage condition causing an issue.
- 21.3 Verify that the DC converter power and ground terminals are connected to the correct J6 cavities.
- 21.4 If the lightning bolt charging icon still does not appear, contact Daimler Truck Technical Support at 855-253-0422, option 4, (5:00 A.M to 4:00 P.M. PT).

March 2022  
SF625A  
REVISED NOTICE

## CTP01T Software Update

1. Make sure the ignition key and battery cut-off switch (if equipped) are in the ON position.

IMPORTANT: Do not turn the ignition or the battery cut-off switch OFF until the software installation is complete.


2. Connect the Nexiq USBLink™ 2 box to the diagnostic connector on the vehicle.
3. Connect the Nexiq USBLink 2 box to the laptop.
4. Open DiagnosticLink®.

IMPORTANT: Make sure that DiagnosticLink is updated to the latest version (8.15 SP1 at the time of publication, or newer) before programming the vehicle. To verify, go to 'Help,' then select 'About.'


See [Fig. 24](#) and [Fig. 25](#)

To reduce the possibility of disruption during programming, make sure DiagnosticLink is connected to CTP01T only.

5. If other modules are already connected in the 'Connections' window, select 'Close Connections' to remove all connected devices.

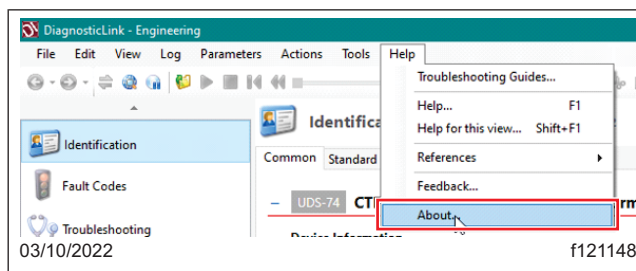


**Fig. 24, Opening the About DiagnosticLink Professional Window**

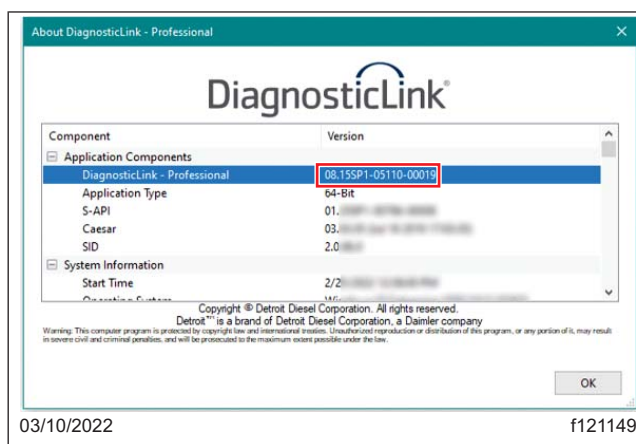

**Fig. 25, DiagnosticLink Application Version**


March 2022  
SF625A  
REVISED NOTICE

6. In the 'Connections' window, right click, and select 'Connect.' See [Fig. 26](#).

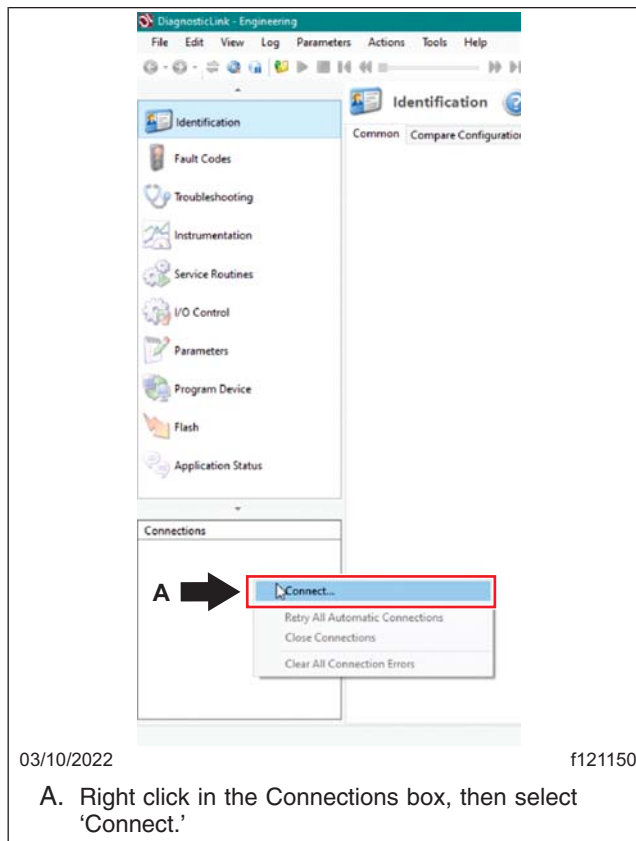

**Fig. 26, Establishing Manual Connection**


7. In the 'Manual Connection' window that appears, select 'CTP01T,' then select the 'Connect' button. Wait until the CTP01T connection turns green. See [Fig. 27](#).

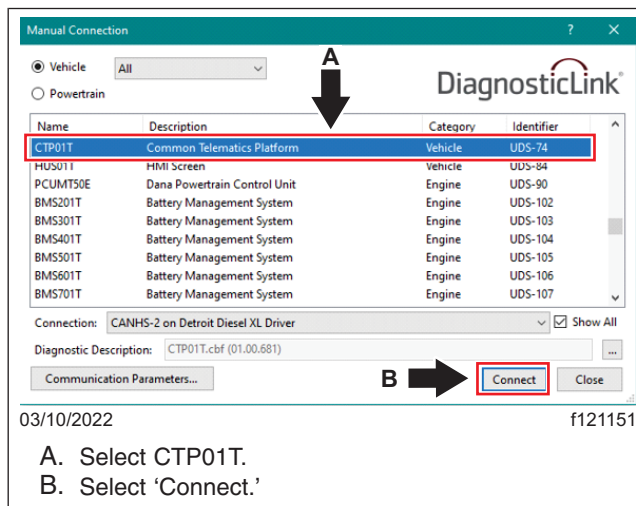

**Fig. 27, Manual Connection Window**


March 2022  
SF625A  
REVISED NOTICE

8. After a successful connection to CTP01T, make sure the diagnostic application variant appears in the upper right corner, and starts with 'App\_'. See Fig. 28. If the diagnostic application variant starting with 'App\_' is not present, close the CTP01T connection and repeat the previous step.

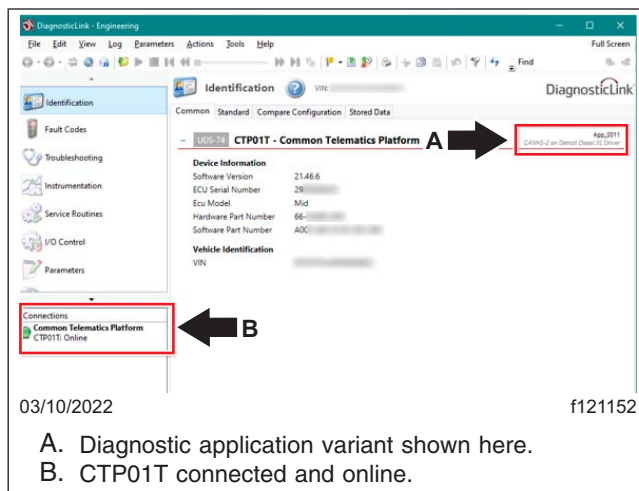

**Fig. 28, Diagnostic Application Variant**


9. Go to 'Action,' 'Telematics,' then select 'CTP USB Stick Flashing.' See Fig. 29.

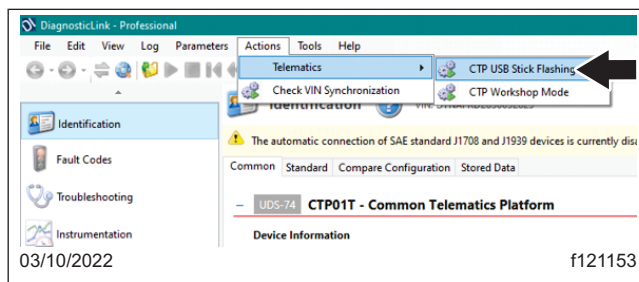

**Fig. 29, Opening CTP USB Stick Flashing Window**

March 2022  
SF625A  
REVISED NOTICE

10. In the 'CTP USB Stick Flashing' window that appears, verify that a green dot appears beside 'Connected to CTP' on the top, a green dot appears beside 'Ready to start' at the bottom, and the fbs version is M167.413.900. See [Fig. 30](#).

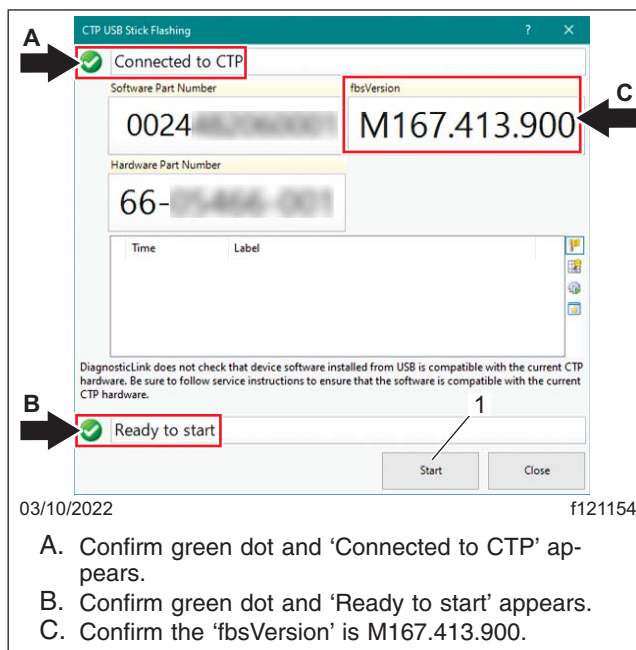

**Fig. 30, CTP USB Stick Flashing Window**


- If the green dot beside 'Connected to CTP' on the top, and the green dot beside 'Ready to start' at the bottom do not appear, disconnect the CTP01T, close and restart DiagnosticLink program. Repeat steps 5 through 10. If the issue still persists after a second attempt, call Detroit Connect support at 855-253-0420, or email [detroitconnect@daimlertruck.com](mailto:detroitconnect@daimlertruck.com). If you do not receive an immediate response submit a WSC ticket to the warranty campaigns group.
- If 'fbsVersion' is not equal to M167.413.900, please contact Detroit Connect support at 855-253-0420, or email [detroitconnect@daimlertruck.com](mailto:detroitconnect@daimlertruck.com) for instructions to update the CTP software. If you do not receive an immediate response submit a WSC ticket to the warranty campaigns group.

March 2022  
SF625A  
REVISED NOTICE

**IMPORTANT:** The file name of the software copied in the USB drive must be 'topas\_sw\_update.tar.gz' in order for DiagnosticLink to recognize the file for a successful CTP software update.

**NOTE:** The USB Adapter must be On-the-Go (OTG) protocol compliant. Non-OTG compliant adapters may result in failure of the CTP software update.

11. Locate the CTP on the upper shelf in the electronics bay. Using a USB mini to USB A adapter, connect the USB drive containing the SF625 software to the CTP at the large blue USB mini connector. See [Fig. 31](#). Some vehicles may already have a harness connected at the large blue CTP connector, which must be disconnected for this procedure. Make sure the USB adapter and the USB stick are completely inserted.

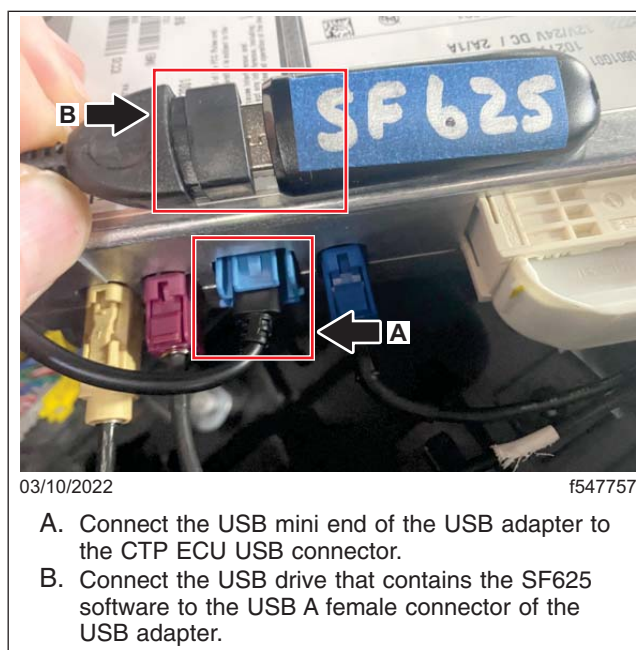

**Fig. 31, USB Drive Connected to the CTP**

**IMPORTANT:** In order to minimize the possibility of disruptions during the CTP flashing procedure:


- The USB flash drive and the mini USB adapter must remain fully connected to the CTP.
  - Vehicle power and ignition should remain ON.
  - Laptop must not be unplugged from the vehicle.
  - Laptop must not be allowed to go to sleep.
  - Laptop must not be used for any purpose other than flashing the CTP.
12. After the USB drive and adapter are connected to the CTP, select the 'Start' button in the 'CTP USB Stick Flashing' window to begin the flashing process. Make a note of the time when the flashing process starts.

March 2022  
SF625A  
REVISED NOTICE


NOTE: The flashing process is automated and requires no interaction with the panel throughout the process. The CTP will shut down and go offline before installing the update. The message 'Waiting for CTP to Reset' will now appear and remain at the bottom of the 'CTP USB Stick Flashing' window while the CTP is offline for approximately 30 minutes until the new software is installed and activated. The message 'Flashing Complete' may also appear at the bottom of the 'CTP USB Stick Flashing' window. See [Fig. 32](#) and [Fig. 33](#).

13. Approximately 30 minutes after starting the CTP USB stick flashing process, or after the 'Flashing Complete' message is displayed, close the 'CTP USB Stick Flashing' window, then connect the DiagnosticLink to CTP01T. See steps 5 through 8.

If the CTP01T does not connect, the software update may still be in progress and may not respond. Wait for an additional 10 minutes between attempting to connect with CTP01T. If CTP01T still does not connect to DiagnosticLink even after 50 minutes from the start time noted in step 12, call Detroit Connect support at 855-253-0420, or email [detroitconnect@daimlertruck.com](mailto:detroitconnect@daimlertruck.com). If you do not receive an immediate response submit a WSC ticket to the warranty campaigns group.

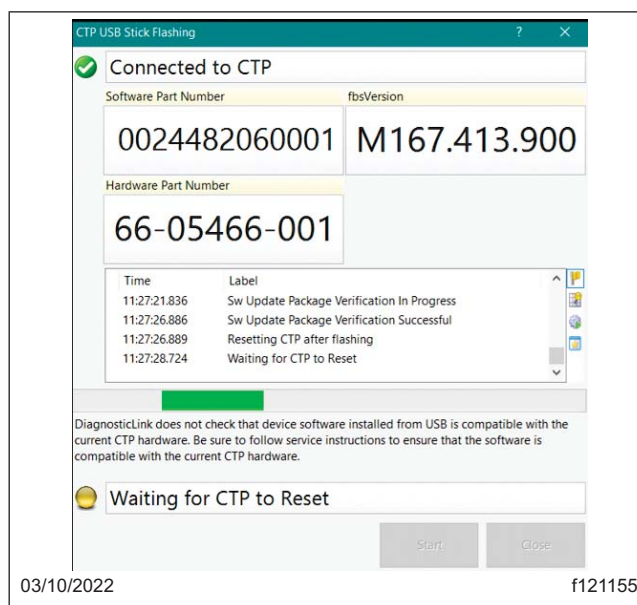


**Fig. 32, Waiting for CTP to Reset Status Message**

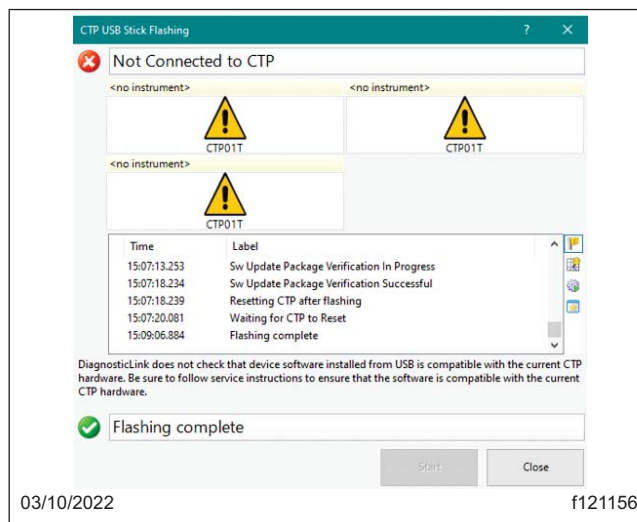

**Fig. 33, Flashing Complete Status Message**


March 2022  
SF625A  
REVISED NOTICE

14. Once the CTP01T connection turns green and online in the 'Connections' window, go to 'Identification,' 'Common,' and verify 'Software Version' is '21.46.6' under 'Device Information.' See [Fig. 34](#).

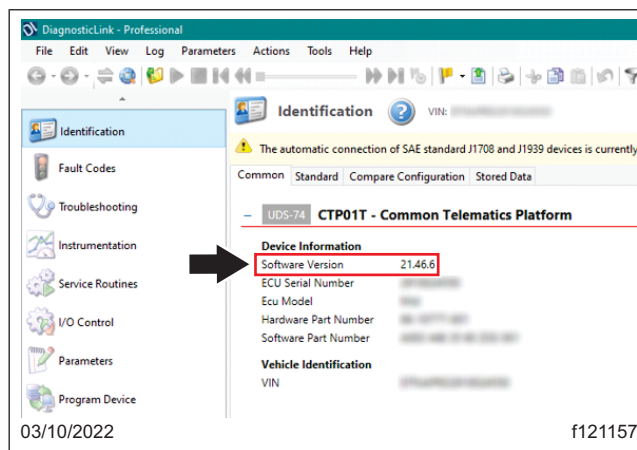

**Fig. 34, Verifying CTP Software Version**

15. Go to 'Identification,' 'Stored Data' and verify 'FBS Sw Version' is '167.600.900.' If either 'Software Version' or 'FBS Sw Version' do not match the above versions, disconnect the CTP01T and connect again. See [Fig. 35](#).

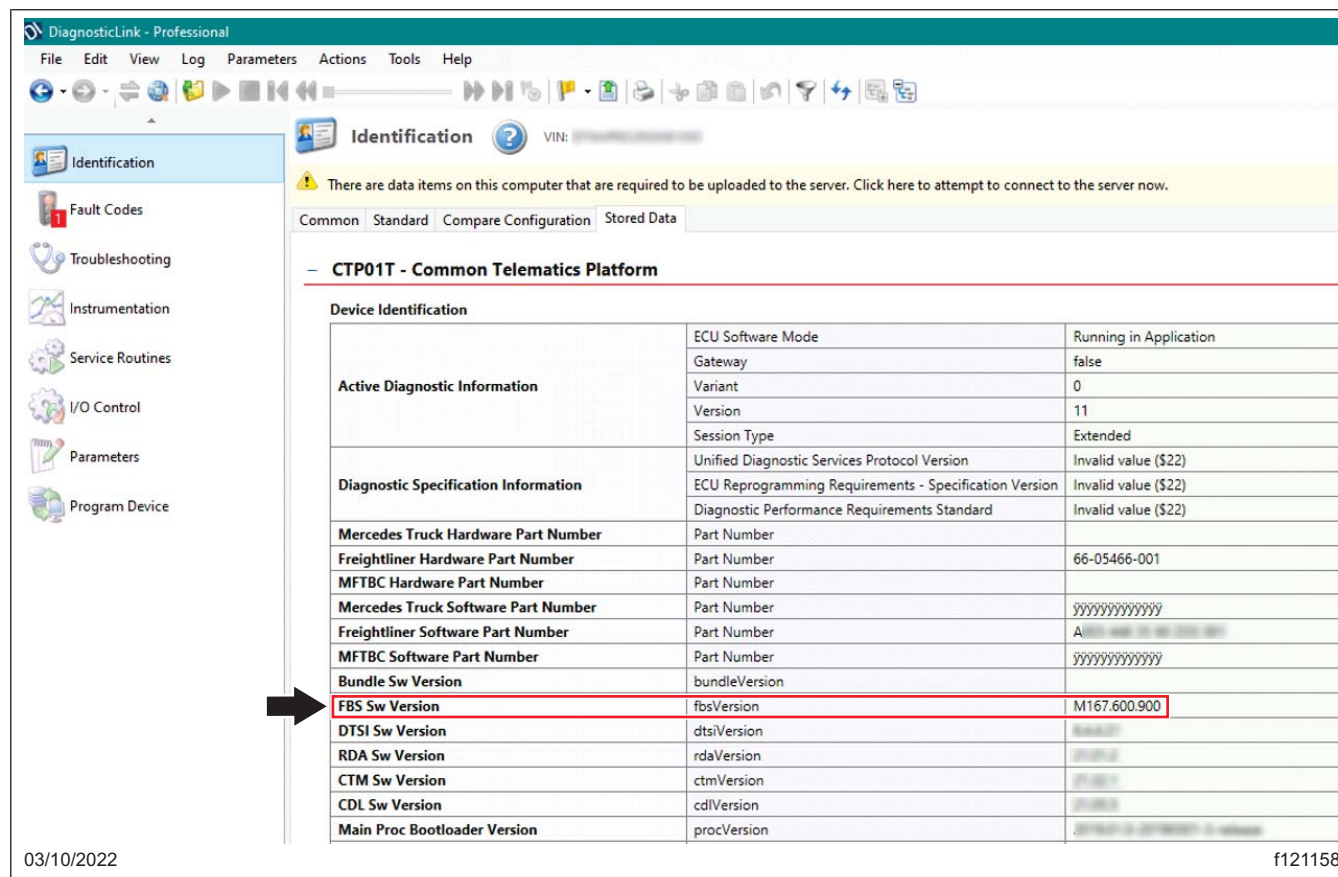


**Fig. 35, Verifying FBS Version**


March 2022  
SF625A  
REVISED NOTICE

16. Within the upper tool bar, go to 'Action,' 'Telematics,' then select 'CTP 3G Sundown.' In the 'CTP 3G Sundown' window that appears, verify a green dot with 'Ready' message appears at the bottom of the window. See [Fig. 36](#) and [Fig. 37](#).

If a green dot with 'Ready' message does not appear at the bottom of the window, disconnect the CTP01T, and restart DiagnosticLink. See steps 5 through 8. Open the CTP 3G Sundown panel. If a green dot with 'Ready' message still does not appear, call Detroit Connect support at 855-253-0420, or email [detroitconnect@daimlertruck.com](mailto:detroitconnect@daimlertruck.com). If you do not receive an immediate response submit a WSC ticket to the warranty campaigns group.

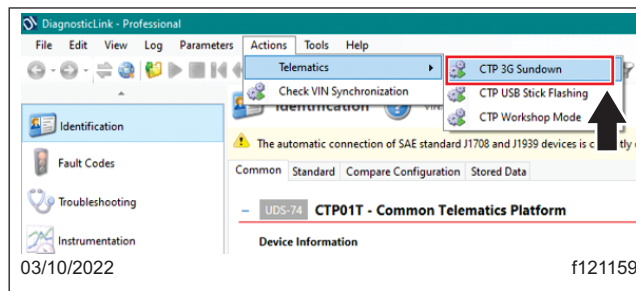

**Fig. 36, Selecting CTP 3G Sundown**

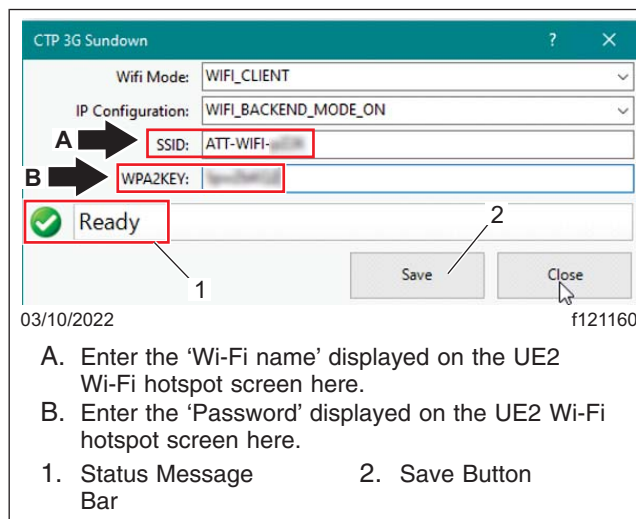

**Fig. 37, CTP 3G Sundown Window**

17. In the 'CTP 3G Sundown' window enter the following parameters. See [Fig. 37](#).

- 17.1 In the 'Wi-Fi mode' drop down menu, select 'WIFI\_CLIENT.'  
17.2 In the 'IP Configuration' drop down menu, select 'WIFI\_BACKEND\_MODE\_ON.'

**IMPORTANT:** The 'Wi-Fi name' and 'Password' must be entered exactly as displayed in the UE2 Wi-Fi hotspot device screen. Some Wi-Fi hotspot devices have a Wi-Fi name that does not fit on one line, and the text on the hotspot screen will need to wrap to the next line in order to show the full name. The Wi-Fi name begins with 'ATT-WI-FI-' followed by a four digit text that is unique to a device. There is a '-' between 'ATT' and 'WIFI', and also between 'WIFI' and the four digits. There are no blank spaces in the 'Wi-Fi name' and 'Password.'

- 17.3 Clear any spaces or characters in the 'SSID' text box and enter the 'Wi-Fi name' displayed on the UE2 Wi-Fi hotspot device screen. See [Fig. 11](#).


March 2022  
SF625A  
REVISED NOTICE

- 17.4 Clear any spaces or characters in the 'WPA2KEY' text box and enter the 'Password' displayed on the UE2 Wi-Fi hotspot device screen.

**IMPORTANT:** Verify that the 'SSID' and 'WPA2KEY' entered in the 'CTP 3G Sundown' window exactly matches the 'Wi-Fi name' and 'Password' on the UE2 Wi-Fi hotspot device display screen. Check upper and lower case characters, and make sure there are no extra spaces in 'SSID' and 'WPA2KEY' text boxes.

- 17.5 Select 'Save' in the 'CTP 3G Sundown' window and wait for DiagnosticLink to finish processing. The status message bar at the bottom will change from green 'Ready' to yellow 'Writing Parameters.' Once the processing is completed successfully, the status message bar will change to green 'Ready'. Select 'Close' to close the 'CTP 3G Sundown' window.

18. To verify the UE2 Wi-Fi hotspot device is connected to the CTP, check for a red connection indicator at the left side of the UE2 Wi-Fi hotspot device display screen with the number '1' displayed in it. See [Fig. 38](#). If the red connection indicator does not turn to '1' after approximately 10 minutes, repeat step 17. If the red connection indicator still does not change to '1,' call Detroit Connect support at 855-253-0420, or email [detroitconnect@daimlertruck.com](mailto:detroitconnect@daimlertruck.com). If you do not receive an immediate response submit a WSC ticket to the warranty campaigns group.

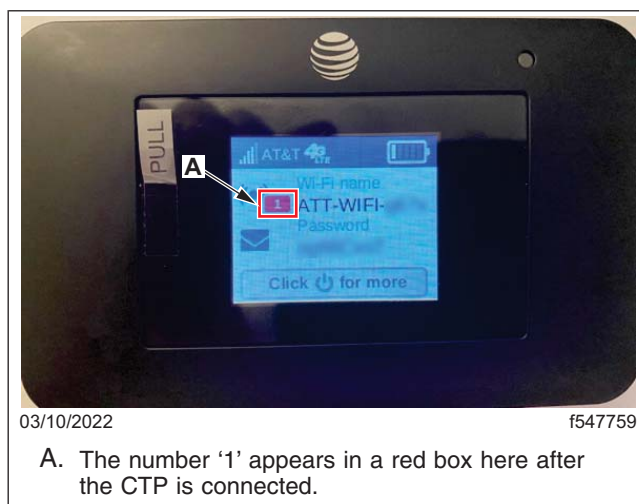


**Fig. 38, Red Connection Indicator**


March 2022  
SF625A  
REVISED NOTICE

**IMPORTANT:** The current software update process can be performed without an internet connection, but an internet connection is required to upload the vehicle data to the server. If the laptop does not have internet connectivity during this software update process, the vehicle data can be uploaded to the server by connecting to a network after completing the work on the vehicle.

19. DiagnosticLink should now display a yellow ribbon message 'There are data items on this computer that are required to be uploaded to the server.' See [Fig. 39](#). To upload the vehicle data to the server, select the message to connect to the server. When prompted, log in to DTNACONNECT using your DTNACONNECT credentials, then select 'OK.' See [Fig. 40](#).

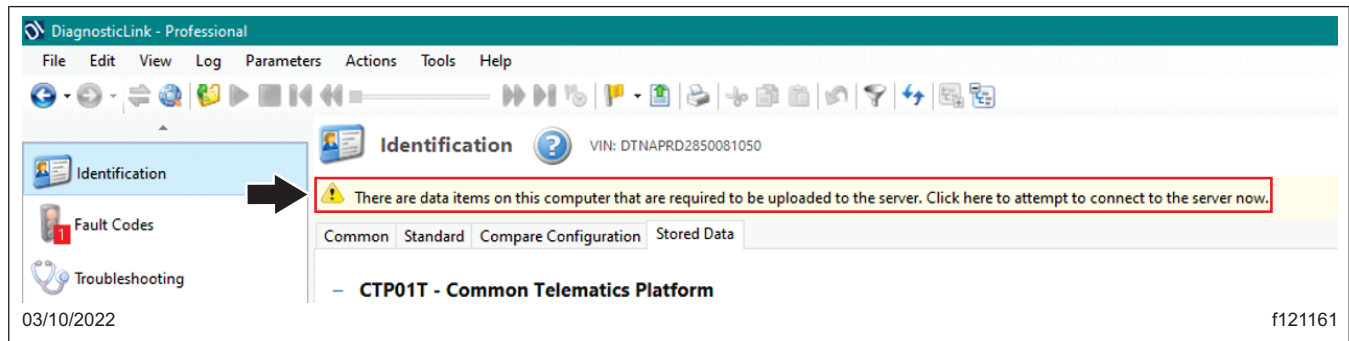

**Fig. 39, Message to Upload Data to the Server**

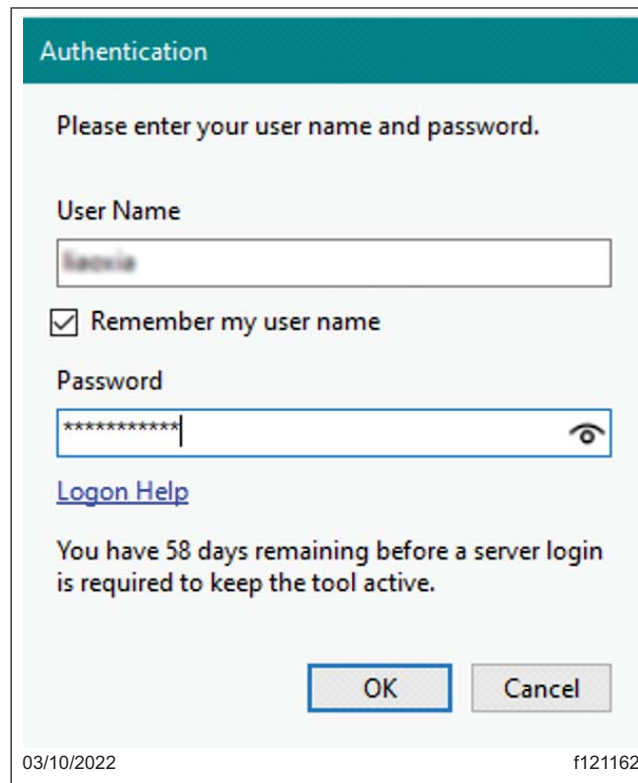

**Fig. 40, DTNA Connect Authentication Window**

March 2022  
SF625A  
REVISED NOTICE

20. Disconnect the USB adapter from the CTP.
21. If the CTP blue USB mini connector was connected to any harness that was disconnected in step 11, connect the harness to the blue CTP USB mini connector.
22. To mount the UE2 Wi-Fi hotspot device in the electronics bay, locate an available space within the electronics bay that can accommodate the UE2 Wi-Fi hotspot device. Some vehicles may have an empty shelf that can be utilized for this purpose. If all electronics bay shelves are occupied, the UE2 Wi-Fi hotspot device can be mounted on the upper shelf of the electronics bay in the area just to the left of the CTP module.

## NOTICE

**When securing the UE2 Wi-Fi hotspot device to a shelf in the electronics bay, snug the tie strap enough only to secure the UE2 Wi-Fi hotspot device from moving. Overtightening the tie strap may damage the device. Prevent excess pressure on the USB charging cable. Excess pressure can permanently damage the USB charging cable.**

23. Using a long tie strap, or two chained tie straps, secure the UE2 Wi-Fi hotspot device to the shelf from front to rear as shown in [Fig. 41](#). A Velcro tape can also be used to secure the UE2 Wi-Fi hotspot device instead of a tie strap.



**Fig. 41, UE2 Wi-Fi Hotspot Device Installed**

24. Verify that the USB charger cable is properly connected to the UE2 Wi-Fi hotspot device, and the Voita 12v to 5v DC converter is fully connected. Route the USB cable along the existing electronics bay harness, and coil the excess USB charger cable within the electronics bay. Secure the USB cable with tie straps.
25. Install the VPDM covers, VPDM, passenger-side lower dash cover, and the electronics bay cover. For instructions, see **Group 60** of the applicable workshop manual.
26. Clean a spot on the base label (Form WAR259), write the campaign number SF625 on a blank gray completion sticker (Form WAR261), and attach it to the base label, indicating this work has been completed.